


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
HM	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
		C		REV ECO-08-004864	29FEB08	LH	BM

- ① DIMENSIONS ARE MAXIMUM UNLESS OTHERWISE SPECIFIED.
- ② MATERIAL: HOUSING— POLYCARBONATE BLUE. TERMINAL— PHOSPHER BRONZE PLATED WITH 1.27μm [.000050] MINIMUM THICK GOLD IN LOCALIZED GOLD PLATE AREA, GOLD FLASH ON THE REMAINDER, OVER 2.54μm [.000100] MINIMUM THICK NICKEL UNDERPLATE.
- 3. PLUG WILL ACCEPT 26 OR 28 AWG SOLID WIRE, 0.74–0.86 [.029–.034] DIAMETER, WITH AN OVAL CABLE JACKET OF 2.29 X 6.61 [.090 X .260] MAXIMUM.
- ④ TERMINATED DIMENSION 6.15 [.242] MAXIMUM.
- ⑤ 1000 ASSEMBLIES PER PACKAGE.
- ⑥ 100 ASSEMBLIES PER PACKAGE.

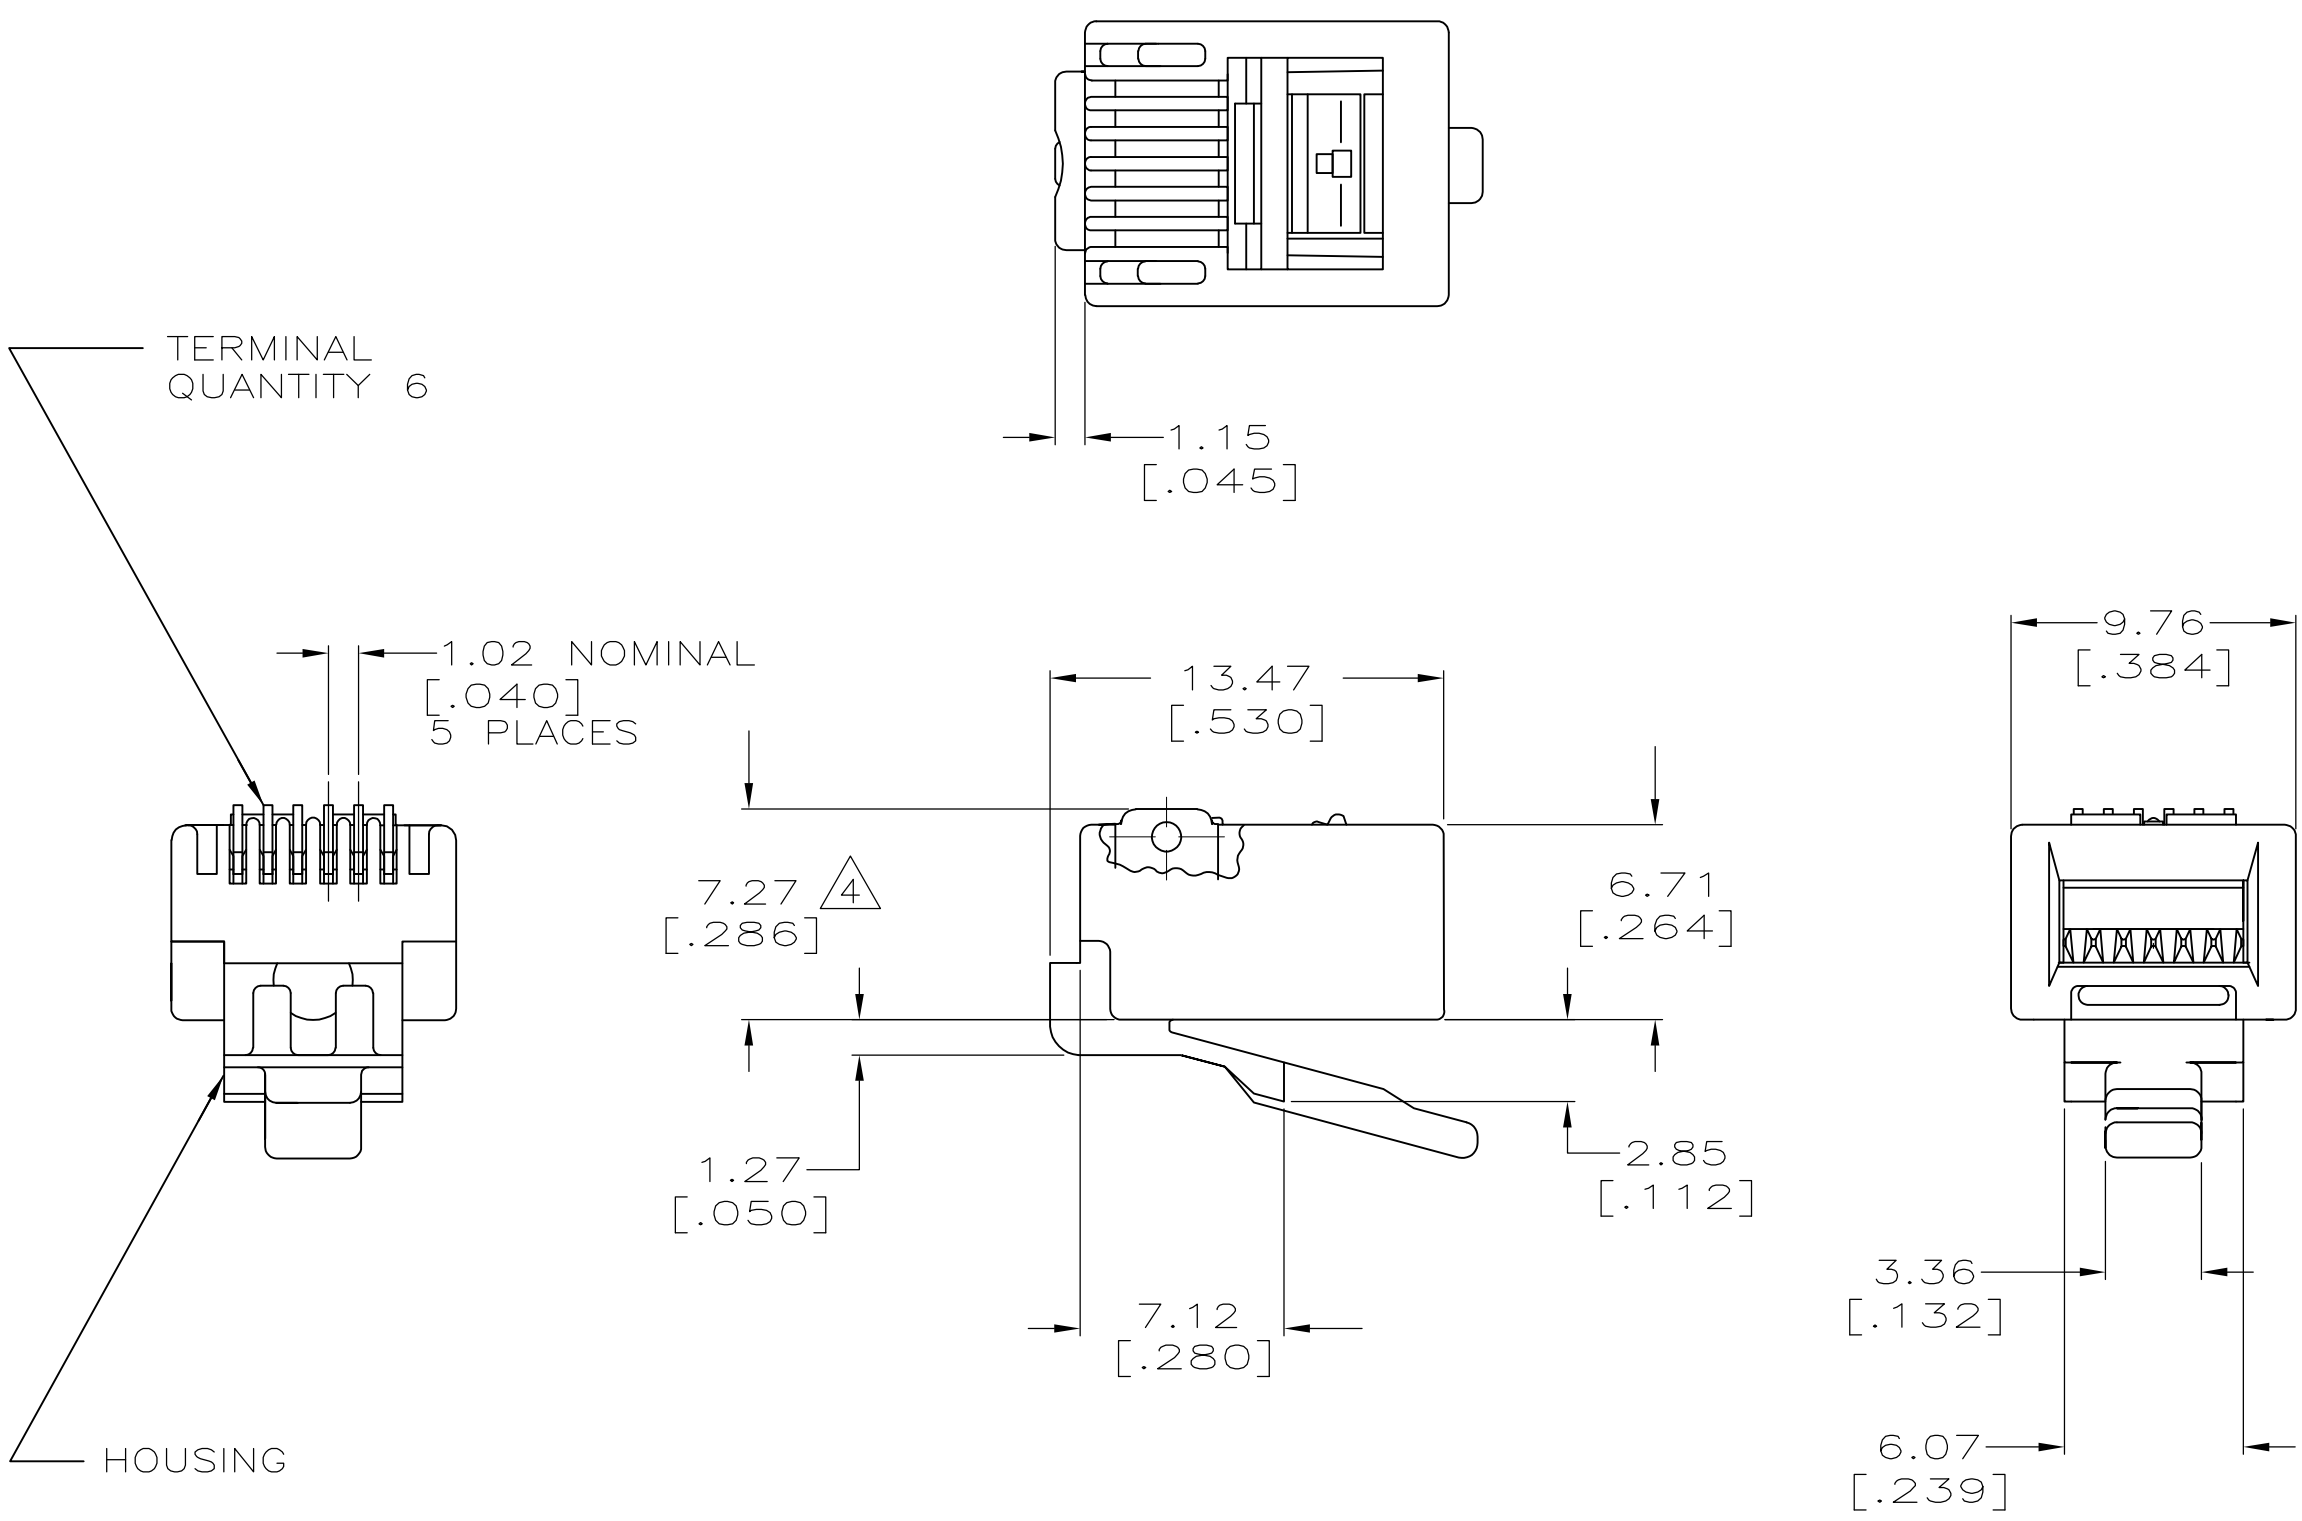

⑥	5-557970-3
⑤	5-557970-2
PACKAGED	PART NO.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN L. HALL 29FEB2008	Tyco Electronics Corporation Harrisburg, PA 17105-3608	
DIMENSIONS: MM [INCHES]		CHK B. MCNEILL 29FEB2008	NAME	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD B. MCNEILL 29FEB2008	MODULAR PLUG ASSEMBLY, 6 POSITION, LINE, SMALL CONDUCTOR, SOLID WIRE	
0 PLC ± - ①	1 PLC ± - ①	PRODUCT SPEC 108-1163	SIZE A2	CAGE CODE 00779
2 PLC ± - ①	3 PLC ± - ①	APPLICATION SPEC 114-6016	DRAWING NO C=557970	RESTRICTED TO -
4 PLC ± - ①	ANGLES ± - ①	WEIGHT -	SCALE 4:1	SHEET 1 of 1
MATERIAL ②	FINISH ②	CUSTOMER DRAWING	REV C	