

**NPB  
563A**

# Switchcraft®

## StudioPatch® Series Patchbays



StudioPatch® Series audio patchbays utilize Switchcraft's EZ Norm technology, allowing signal flow to be changed from the front of the patchbay using a standard screwdriver.

Two versions terminated to DB25 connectors, wired to the Tascam DTRS standard pinout allow for direct connection to Digidesign's most popular audio interfaces, creating greater flexibility in your DAW environment. A third version terminated to Cannon DL is also available.

StudioPatch® Series audio patchbays feature bussed grounds, and are hard-wired using 110 Ohm AES/EBU digital audio cable... all in just 1 rack space! All Switchcraft® Patchbays are built by hand in the USA.

For more information, visit:

<http://www.switchcraft.com/products/studiopatch6425.html>

**Switchcraft®**  
www.switchcraft.com  
5555 N. Elston Avenue/Chicago, IL 60630  
Phone: 773-792-2700 Fax: 773-792-2129

## Options



*StudioPatch® 6425* 64 Point/32 Channel TT Patchbay Terminated to DB25



*StudioPatch® 9625* 96 Point/48 Channel TT Patchbay Terminated to DB25





*StudioPatch® 96DL* 96 Point/48 Channel TT Patchbay Terminated to Cannon DL

## Wiring Diagrams

### DB25 Wiring Chart

Jack (Channel)	Tip (White)	Ring (Black)	Sleeve (Bare)
1	24	12	25
2	10	23	11
3	21	9	22
4	7	20	8
5	18	6	19
6	4	17	5
7	15	3	16
8	1	14	2

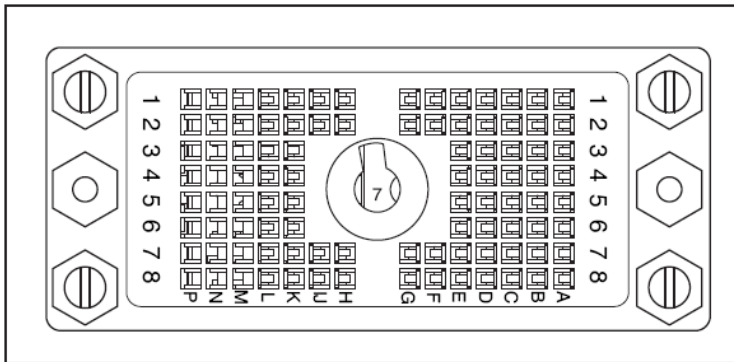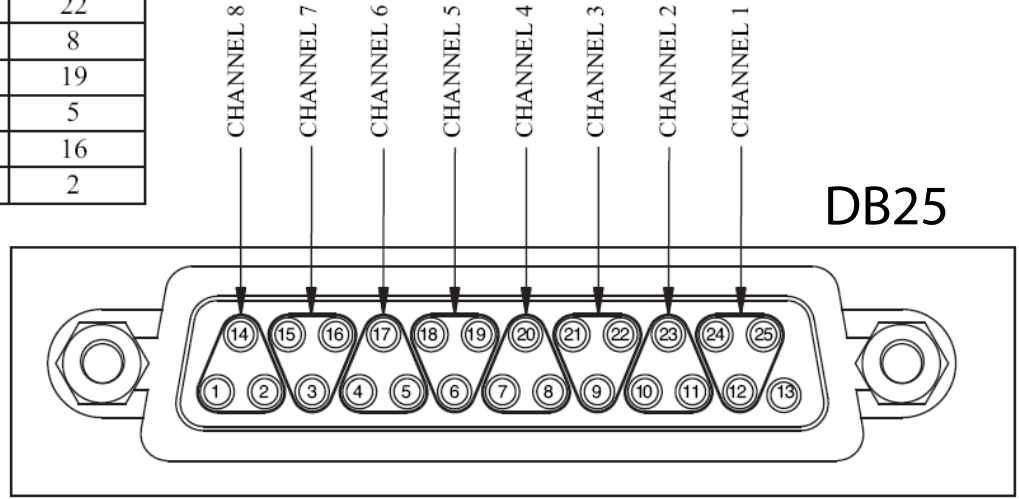

Cannon DL

WIRING CHART			
JACK NO	TIP	RING	SLEEVE
1	A1	B1	C1
2	A2	B2	C2
3	A3	B3	C3
4	A4	B4	C4
5	A5	B5	C5
6	A6	B6	C6
7	A7	B7	C7
8	A8	B8	C8
9	D1	E1	F1
10	D2	E2	F2
11	D3	E3	G1
12	D4	E4	G2
13	D5	E5	G7
14	D6	E6	G8
15	D7	E7	F7
16	D8	E8	F8
17	L1	K1	J1
18	L2	K2	J2
19	L3	K3	H1
20	L4	K4	H2
21	L5	K5	H7
22	L6	K6	H8
23	L7	K7	J7
24	L8	K8	J8

## Audio Cabling Solutions

StudioPatch® Series Audio Cabling Solutions are exclusively designed for high quality, professional audio applications. StudioPatch® Series Cables utilize 110 Ohm cabling ideal for both analog and AES/EBU digital audio signals.

### **DB25 Breakout Cables Feature:**

- Premium Switchcraft® quarter-inch TRS plugs and XLR connectors.
- High quality AMP DB25 connectors.
- Belden 110 Ohm balanced eight-pair cabling for analog and digital audio signals.



### **Switchcraft® TT Patchcords Feature:**

- Nickel Plated TT Plugs.
- Low Capacitance 110 Ohm Cabling.
- Rugged Strain Relief.
- Wide Variety of Colors and Lengths.