
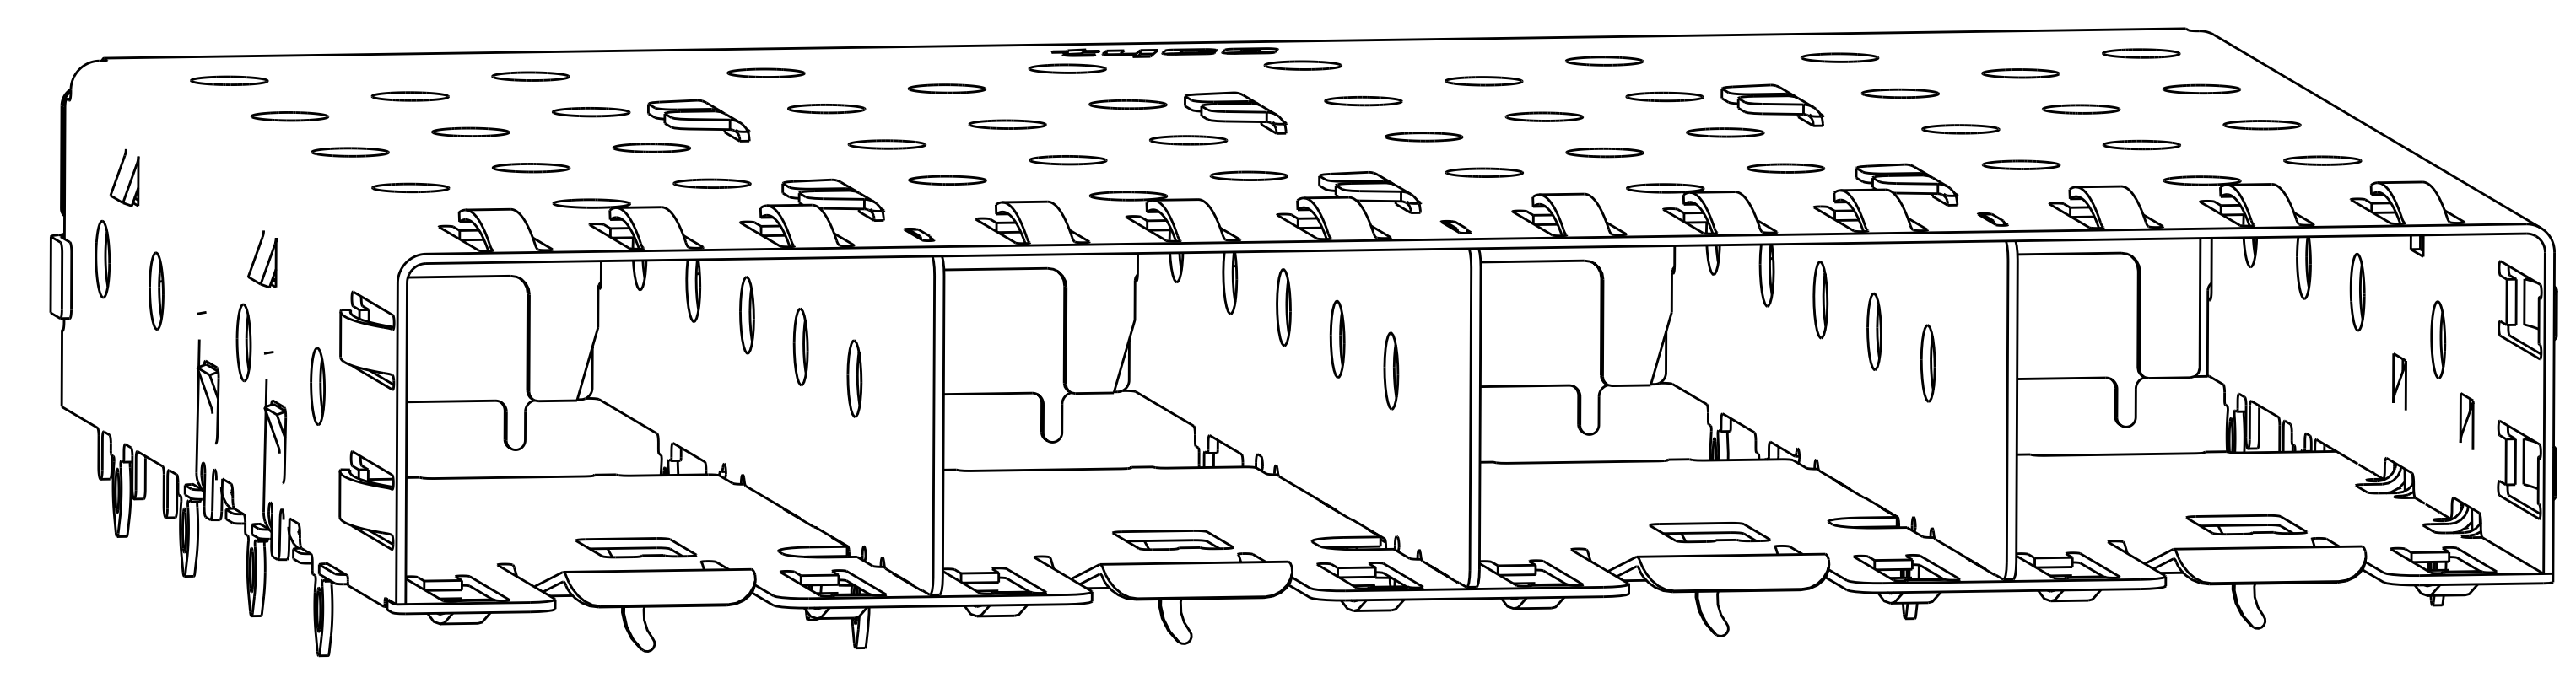
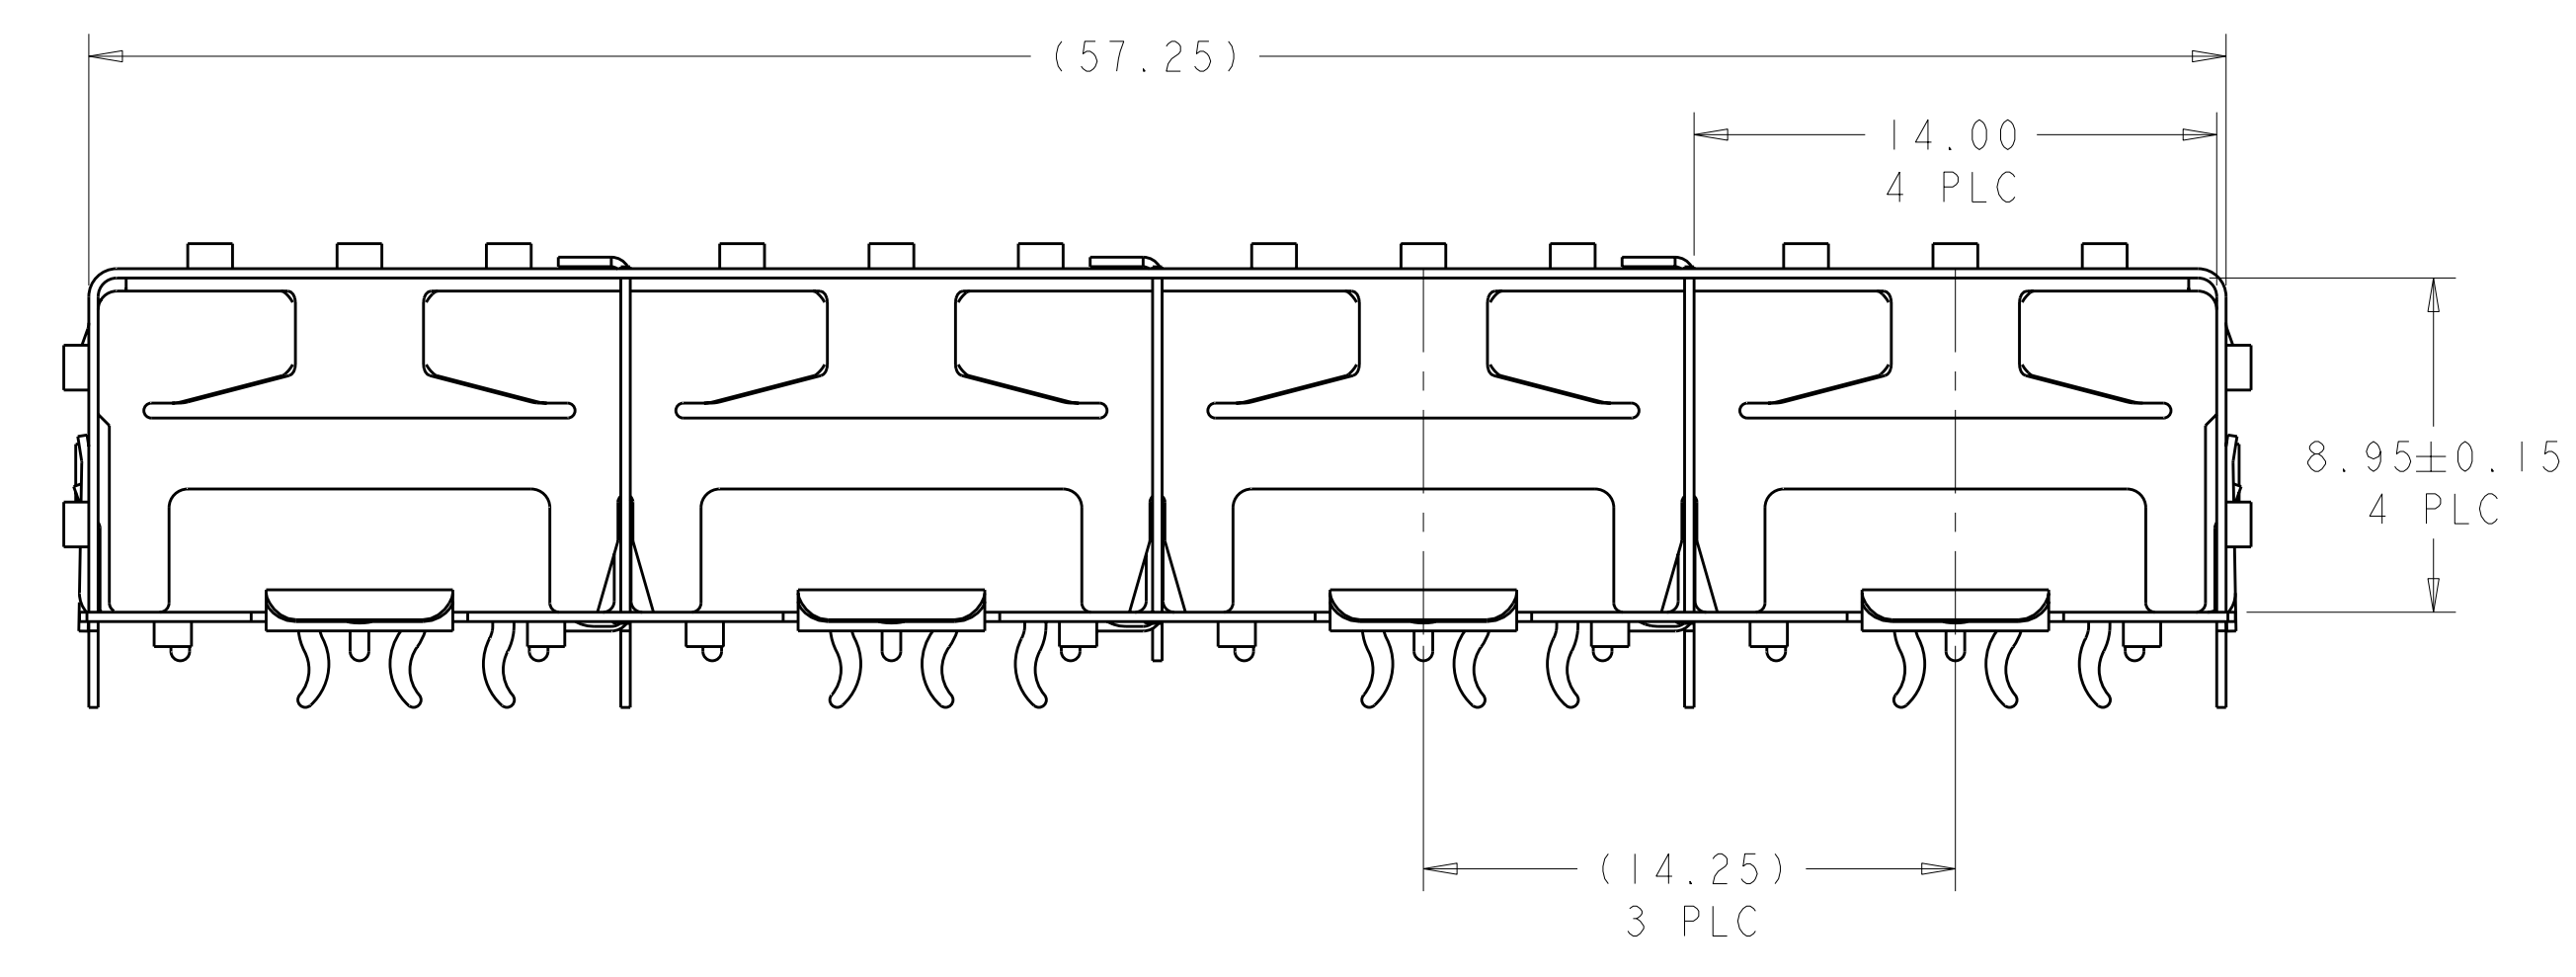


LOC	DIST	REV	DATE	BY	CHK	APPV
GP	00					

REV	DESCRIPTION	DATE	BY	CHK	APPV
C	REVISED PER EC 0S13-0354-04	12OCT04	JG	JK	
D	REVISED PER EC 0S13-0414-04	01APR2005	JAR	JK	
E	REVISED PER ECO-06-006624	26MAR2006	REH	JK	
E1	REVISED PER ECO-07-011809	18/MAY/07	ZMR	JRK	

- 1 MATERIAL: 0.25 THICK COPPER ALLOY.
- 2 FINISH: TIN PLATING PER ASTM B 545, 1.25µm MINIMUM THICKNESS
ALL OVER NICKEL FLASH PER QQ-N-290. NONPLATED EDGES PERMISSIBLE.
- 3 PADS AND VIAS CHASSIS GROUND.
- 4 DATUM AND BASIC DIMENSION ESTABLISHED BY CUSTOMER.
- 5 REFERENCE APPLICATION SPEC 114-13120, HOLE A, FOR RECOMMENDED
DRILL HOLE DIAMETER AND PLATING THICKNESSES.

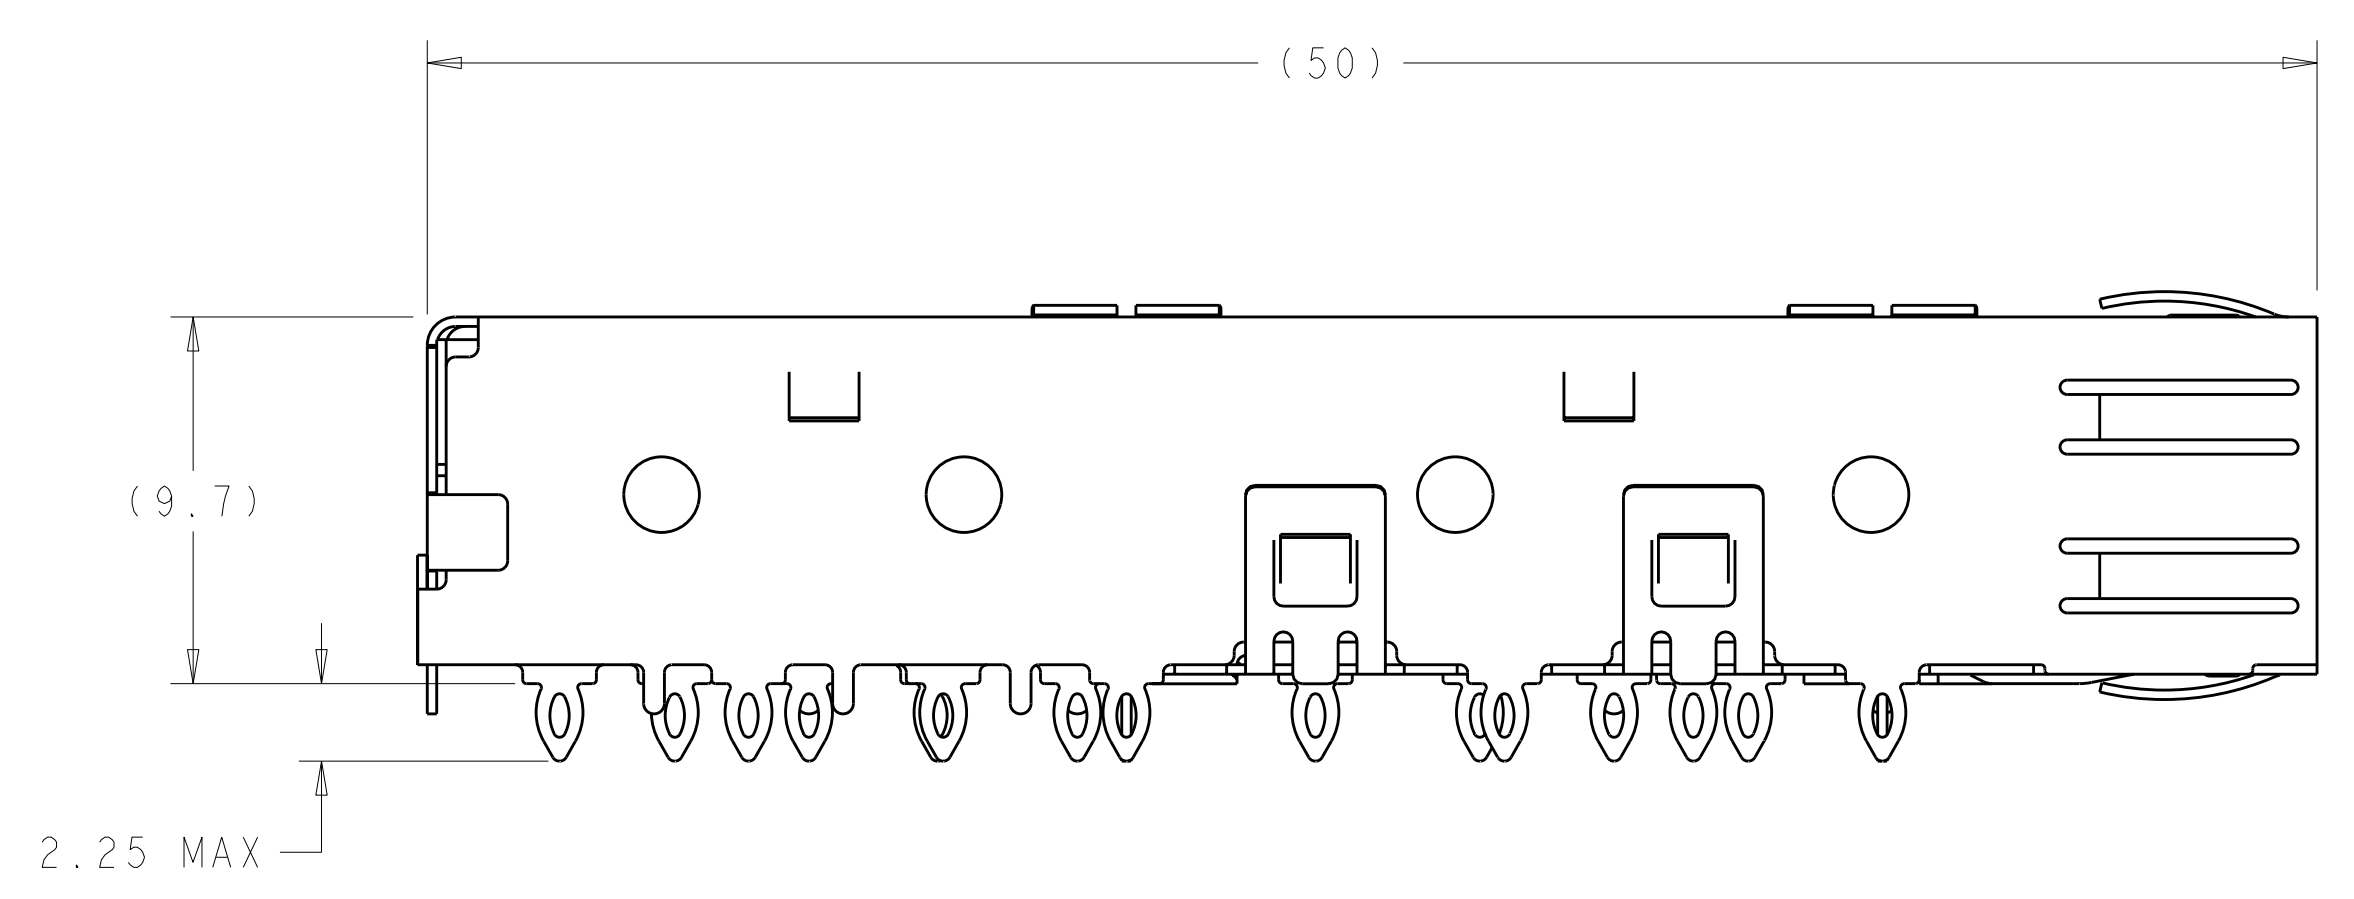

1658744-1
 1X4 CAGE ASSEMBLY
 SCALE 6:1

IX4	1658744-1
POSITION	PART NUMBER

<small>THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.</small>		DWN: M. SHIRK 04JUN03 CHK: J. KOPPENHEFFER 06MAY04 APPV: M. WALMSLEY 06MAY04	Tyco Electronics Harrisburg, PA 17105-3608
DIMENSIONS: mm 	TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± 1 PLC ±0.1 2 PLC ± 3 PLC ± 4 PLC ± ANGLES ±0°	NAME: CAGE ASSEMBLY, 1X4 PRESS FIT, SFP PRODUCT SPEC: 108-1950 APPLICATION SPEC: 114-13120 WEIGHT: -	SIZE: A CAGE CODE: 00779 DRAWING NO: C-1658744 RESTRICTED TO: -
MATERIAL: FINISH:		CUSTOMER DRAWING SCALE: 1:1 SHEET 1 OF 2 REV: E1	

