


IEC gender changer IEC C20 / IEC J, screw-on mounting



Screw-On Version



Screw-On Version

**Description**

- Panel Mount:
Screw-on from front or rear-side
- Inlet, Pin temperature 70 °C, Protection class I

Approvals

- UL License Number: E96454

Weblinks


[Approvals](#), [RoHS](#), [CHINA-RoHS](#), [e-Store](#), [SCHURTER-Stock-Check](#), [Distributor-Stock-Check](#)

Technical Data

Ratings IEC	16A / 250VAC; 50Hz	Appliance-Inlet/-Outlet	C20 acc. to IEC/EN 60320-1 and J acc. to IEC/EN 60320-2-2, UL 498, CSA C22.2 no. 42 (for cold conditions) pin-temperature 70 °C, 16A, Protection class I
Ratings UL/CSA	20A / 125VAC; 60Hz		
Dielectric Strength	> 4 kVAC between L-N > 6 kVAC between L/N-PE (1 min/50Hz)		
Allowable Operation Temp.	-25 °C to 70 °C		
Degree of Protection	from front side IP 40 acc. to IEC 60529 from rear-side IP 40 acc. to IEC 60529		
Protection Class	Suitable for appliances with protection class I acc. to IEC 61140		
Panel Thickness s	Screw-on: Mounting screw torque max 0.5Nm		
Material: Housing	Thermoplastic, black, UL 94V-0		

Dimensions

Length |-----| 53 mm

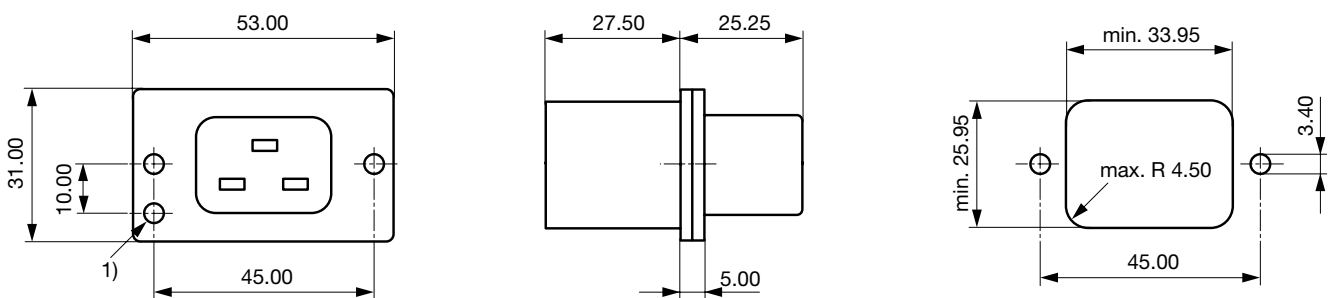

1) Orientation hole

Variants
[Distributor-Stock-Check](#) | [SCHURTER-Stock-Check](#) | [e-Store](#)

Panel mounting	Panel Thickness s [mm]	Order Number
Screw-on	8	4730.0100

Packaging unit

100 Pcs