

IEC appliance inlet C14, screw-on mounting, front side, solder terminal



Screw-On Version

**Description**

- Panel Mount:
Screw-on mounting on PCB from front side
- Inlet, Pin temperature 70 °C, Protection class I
- For PCB mounting

Approvals

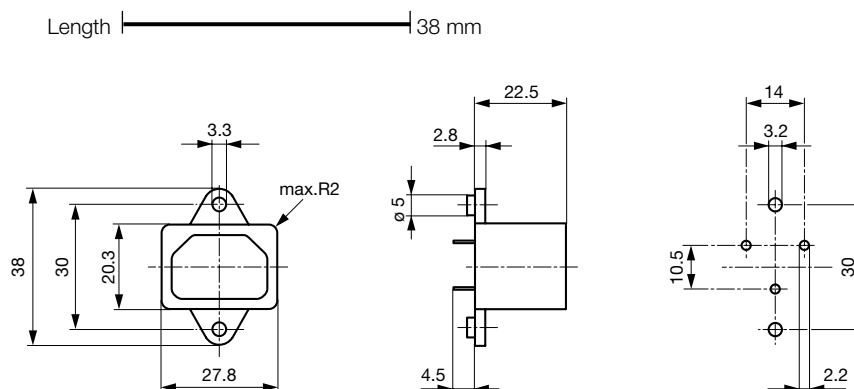
- VDE License Number: 40022665
- UL License Number: E96454

Weblinks

Approvals, RoHS, CHINA-RoHS, e-Store, SCHURTER-Stock-Check, Distributor-Stock-Check

Technical Data

Ratings IEC	10A / 250VAC; 50Hz	Appliance-Inlet/-Outlet	C14 acc. to IEC/EN 60320-1, UL 498, CSA C22.2 no. 42 (for cold conditions) pin-temperature 70 °C, 10A, Protection class I
Ratings UL/CSA	10A / 250VAC; 60Hz		
Dielectric Strength	> 2 kVAC between L-N > 2 kVAC between L/N-PE (1 min/50Hz)		
Allowable Operation Temp.	-25 °C to 70 °C		
Degree of Protection	from front side IP 40 acc. to IEC 60529		
Protection Class	Suitable for appliances with protection class I acc. to IEC 61140		
Terminal	For PCB mounting		
Panel Thickness s	Screw-on mounting on PCB: max 1.6 mm Mounting screw torque		
Material: Housing	Thermoplastic, black, UL 94V-0		

Dimensions**Variants**

Distributor-Stock-Check | SCHURTER-Stock-Check | e-Store

Panel mounting	Panel Thickness s [mm]	Order Number
Screw-on mounting on PCB	1.6	4300.0076

Packaging unit 50 Pcs