


IEC appliance outlet F shuttered, snap-in mounting, front side, solder/quick connect terminal



Snap-In Version

**Description**

- Panel Mount Snap-In Version, from front side
- Outlet shuttered, Pin temperature 70 °C, Protection class I
- Solder terminals or quick connect terminals

**Approvals**

- VDE License Number: 40010659
- UL License Number: E96454

**Other versions on request**

- For protection class II

**Weblinks**

[Approvals](#), [RoHS](#), [CHINA-RoHS](#), [e-Store](#), [SCHURTER-Stock-Check](#), [Distributor-Stock-Check](#)

**Technical Data**



Ratings IEC	10A / 250VAC; 50Hz
Ratings UL/CSA	15A / 250VAC; 60Hz
Dielectric Strength	> 2 kVAC between L-N > 2 kVAC between L/N-PE (1 min/50Hz)
Allowable Operation Temp.	-25 °C to 70 °C
Degree of Protection	from front side IP 30 acc. to IEC 60529
Protection Class	Suitable for appliances with protection class I acc. to IEC 61140
Terminal	Solder terminals or quick connect terminals
Panel Thickness s	Snap-in: 1/1.2/1.5/2/2.5/3 mm
Material: Housing	Thermoplastic, black, UL 94V-0

Appliance-Inlet/-Outlet	F acc. to IEC/EN 60320-2-2, UL 498, CSA C22.2 no. 42 (for cold conditions) pin-temperature 70 °C, 10A, Protection class I
-------------------------	---


**Dimensions**

4723

Length 35 mm

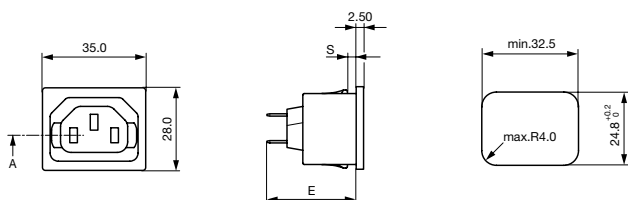

Shutter operation:  
shutters opened by plug insertion



Shutter operation:  
shutters closed when plug is removed

- E: Solder terminals 3.5 x 0.8 mm: 28.4 mm
- E: SQuick connect terminals 4.8 x 0.8 mm: 31.1 mm
- E: Quick connect terminals 6.3 x 0.8 mm: 33.2 mm
- S: 1.0/1.2/1.5/2.0/2.5/3.0 mm

[Distributor-Stock-Check](#) | [SCHURTER-Stock-Check](#) | [e-Store](#)

## Variants

Distributor-Stock-Check | SCHURTER-Stock-Check | e-Store

Type	Panel mounting	Panel Thickness s [mm]	Terminal	Order Number
4723	Snap-in	1	Quick connect terminals 4.8 x 0.8 mm	4723.0100
4723	Snap-in	1.2	Quick connect terminals 4.8 x 0.8 mm	4728.0100
4723	Snap-in	1.5	Quick connect terminals 4.8 x 0.8 mm	4724.0100
4723	Snap-in	2	Quick connect terminals 4.8 x 0.8 mm	4725.0100
4723	Snap-in	2.5	Quick connect terminals 4.8 x 0.8 mm	4726.0100
4723	Snap-in	3	Quick connect terminals 4.8 x 0.8 mm	4727.0100
4723	Snap-in	1	Quick connect terminals 6.3 x 0.8 mm	4723.0000
4723	Snap-in	1.2	Quick connect terminals 6.3 x 0.8 mm	4728.0000
4723	Snap-in	1.5	Quick connect terminals 6.3 x 0.8 mm	4724.0000
4723	Snap-in	2	Quick connect terminals 6.3 x 0.8 mm	4725.0000
4723	Snap-in	2.5	Quick connect terminals 6.3 x 0.8 mm	4726.0000
4723	Snap-in	3	Quick connect terminals 6.3 x 0.8 mm	4727.0000
4723	Snap-in	1	Solder terminals 3.8 x 0.8 mm	4723.0300
4723	Snap-in	1.2	Solder terminals 3.8 x 0.8 mm	4728.0300
4723	Snap-in	1.5	Solder terminals 3.8 x 0.8 mm	4724.0300
4723	Snap-in	2	Solder terminals 3.8 x 0.8 mm	4725.0300
4723	Snap-in	2.5	Solder terminals 3.8 x 0.8 mm	4726.0300
4723	Snap-in	3	Solder terminals 3.8 x 0.8 mm	4727.0300

Class II product also available on request

Cord retaining clamps and insulation covers see accessories

Packaging unit 100 Pcs

## Accessory

## Description

Assorted Covers  
Rear Cover

0859.0047

Cord retaining kits  
Cord retaining strain relieve

Flat head, E

4700.0005

Flat head, G

4700.0007