

IEC plug connector E, rewirable, straight, max. cable diameter 10 mm



4732/4735



Description

- Rewireable plug:
- Screw-on
- Inlet, Pin temperature 70 °C, Protection class I
- Cable
- Substitute for type

Approvals

- VDE License Number: 40011482
- UL License Number: E96454
- CSA License Number: 201904

Weblinks

Approvals, RoHS, CHINA-RoHS, e-Store, SCHURTER-Stock-Check, Distributor-Stock-Check

Technical Data


| | |
|---------------------------|---|
| Ratings IEC | 10 A / 250 VAC; 50 Hz |
| Ratings UL/CSA | 15 A / 250 VAC; 60 Hz |
| Dielectric Strength | > 2 kVAC between L-N > 2 kVAC between L/N-PE (1 min/50 Hz) |
| Allowable Operation Temp. | -25 °C to 70 °C |
| Protection Class | Suitable for appliances with protection class I acc. to IEC 61140 |
| Terminal | Cable |
| Material: Housing | Thermoplastic, black, UL 94V-0 |

| | |
|-------------------------|--|
| Appliance-Inlet/-Outlet | E acc. to IEC/EN 60320-2-2, UL 498, CSA C22.2 no. 42 (for cold conditions) pin-temperature 70 °C, 10 A, Protection class I |
|-------------------------|--|

Dimensions

4735

Length |-----| 28.7 mm

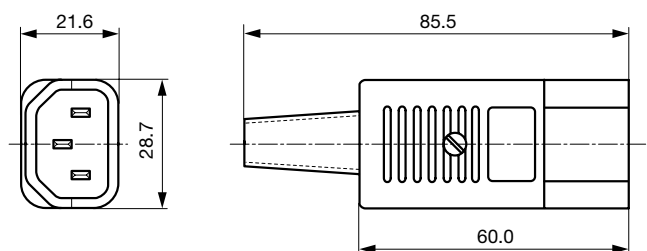

Variants

Distributor-Stock-Check | SCHURTER-Stock-Check | e-Store

| Color | Max. cable diameter | Max. wire size | Order Number |
|-------|---------------------|--------------------------------------|--------------|
| black | 10.0 mm | 3 x 2.1 mm ² / 3 x 14 AWG | 4735.0000 |

Max. torque for screws: Terminal: 0.5 Nm, Cable clamp: 0.3 Nm, Cover: 0.3 Nm

Cord retaining clamp see accessories

Packaging unit

100 Pcs

Accessory

Description

[Cord retaining kits](#)

Cord retaining strain relieve

Countersunk, F

4700.0006

Flat head, G

4700.0007