


Stripp Block for Snap Mounting with 4 IEC Appliance Outlets C14 and space for extra component



Snap-In Version



### Description

- Panel Mount:  
Snap-In Version from front side
- 3 Functions:  
Module of 4 outlets, with additional carrier frame for accessory modules, Pin temperature 70 °C, Protection class I
- Solder terminals or quick connect terminals

### Approvals

- CSA License Number: 56242

### Characteristics

- Insulation cover on the rear-side
- Qualified for use in equipment according IEC/EN 60950

### Other versions on request

- For protection class II

### Weblinks

[Approvals](#), [RoHS](#), [CHINA-RoHS](#), [e-Store](#), [SCHURTER-Stock-Check](#), [Distributor-Stock-Check](#)

### Technical Data


Ratings IEC	10A / 250VAC; 50Hz
Ratings UL/CSA	15A / 250VAC; 60Hz
Dielectric Strength	> 2kVAC between L-N > 2kVAC between L/N-PE (1 min/50Hz)
Allowable Operation Temp.	-25 °C to 70 °C
Degree of Protection	from front side IP 30 acc. to IEC 60529
Protection Class	Suitable for appliances with protection class I acc. to IEC 61140
Terminal	Solder terminals or quick connect terminals
Panel Thickness s	Snap-in1/1.2/1.5/2/2.5/3 mm tolerance +0.0/-0.1
Material: Housing	Thermoplastic, black, UL 94V-0

Appliance-Inlet/-Outlet	F acc. to IEC/EN 60320-2-2, UL 498 CSA C22.2 no. 42 (for cold conditions) pin-temperature 70 °C, 10A, Protection class I
-------------------------	--

### Dimensions

Quadbloc + One 4754

Cut-out for 2 mm Snap-in Inlet

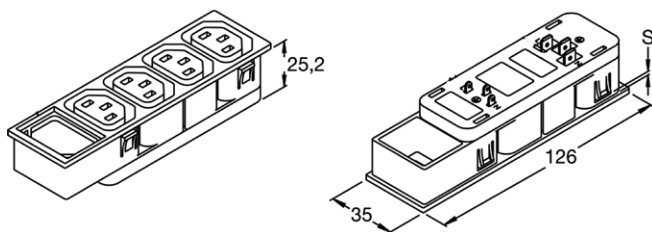

Panel cut-out 122.1 x 32.5 mm, corner radius max. 1 mm  
With appliance inlet, type 6100

## Variants

Distributor-Stock-Check | SCHURTER-Stock-Check | e-Store

Panel Thickness [mm]	Terminal	Length [mm]	Length L2 [mm]	Order Number
1	Quick connect terminals 6.3 x 0.8 mm	126	122.1	4754.3200
1.2	Quick connect terminals 6.3 x 0.8 mm	126	122.1	4754.8200
1.5	Quick connect terminals 6.3 x 0.8 mm	126	122.1	4754.4200
2	Quick connect terminals 6.3 x 0.8 mm	126	122.1	4754.5200
2.5	Quick connect terminals 6.3 x 0.8 mm	126	122.1	4754.6200
3	Quick connect terminals 6.3 x 0.8 mm	126	122.1	4754.7200
1	Solder terminals 4 x 0.8 mm	126	122.1	4754.3400
1.2	Solder terminals 4 x 0.8 mm	126	122.1	4754.8400
1.5	Solder terminals 4 x 0.8 mm	126	122.1	4754.4400
2	Solder terminals 4 x 0.8 mm	126	122.1	4754.5400
2.5	Solder terminals 4 x 0.8 mm	126	122.1	4754.6400
3	Solder terminals 4 x 0.8 mm	126	122.1	4754.7400
1	Solder terminals 4 x 0.8 mm and quick connect terminals 6.3 x 0.8 mm	126	122.1	4754.3000
1.2	Solder terminals 4 x 0.8 mm and quick connect terminals 6.3 x 0.8 mm	126	122.1	4754.8000
1.5	Solder terminals 4 x 0.8 mm and quick connect terminals 6.3 x 0.8 mm	126	122.1	4754.4000
2	Solder terminals 4 x 0.8 mm and quick connect terminals 6.3 x 0.8 mm	126	122.1	4754.5000
2.5	Solder terminals 4 x 0.8 mm and quick connect terminals 6.3 x 0.8 mm	126	122.1	4754.6000
3	Solder terminals 4 x 0.8 mm and quick connect terminals 6.3 x 0.8 mm	126	122.1	4754.7000

Please note, all quadblocs are available in protection-class II upon request.

Cord retaining clamp see accessories

## Packaging unit

40 Pcs

## Accessory

## Description

## Cord retaining kits

Cord retaining strain relieve



Flat head, Z	0888.0021
Flat head, E	4700.0005
Flat head, G	4700.0007
Flat head, H	4700.0008