


Stripp Block for Snap Mounting with 4 IEC Appliance Outlets C14 and space for 2 extra components



Snap-In Version



Description

- Panel Mount:
Snap-In Version from front side
- 4 Functions:
Module of 4 outlets, with additional carrier frame for accessory modules, Pin temperature 70 °C, Protection class I
- Solder terminals or quick connect terminals

Approvals

- VDE License Number: 40010521
- UL License Number: E96454
- CSA License Number: 56242

Characteristics

- Busbar is of single piece (no soldering)
- Insulation cover on the rear-side
- Qualified for use in equipment according IEC/EN 60950

Other versions on request

- For protection class II

Weblinks

[Approvals](#), [RoHS](#), [CHINA-RoHS](#), [e-Store](#), [SCHURTER-Stock-Check](#), [Distributor-Stock-Check](#)

Technical Data


Ratings IEC	10A / 250VAC; 50Hz
Ratings UL/CSA	15A / 250VAC; 60Hz
Dielectric Strength	> 2 kVAC between L-N > 2 kVAC between L/N-PE (1 min/50Hz)
Allowable Operation Temp.	-25 °C to 70 °C
Degree of Protection	from front side IP 30 acc. to IEC 60529
Protection Class	Suitable for appliances with protection class I acc. to IEC 61140
Terminal	Solder terminals or quick connect terminals
Panel Thickness s	Snap-in1/1.2/1.5/2/2.5/3 mm tolerance +0.0/-0.1
Material: Housing	Thermoplastic, black, UL 94V-0

Appliance-Inlet/-Outlet	F acc. to IEC/EN 60320-2-2, UL 498 CSA C22.2 no. 42 (for cold conditions) pin-temperature 70 °C, 10A, Protection class I
-------------------------	---

Dimensions

Quadbloc + Two 4758

Cut-out for 2 mm Snap-in Inlet

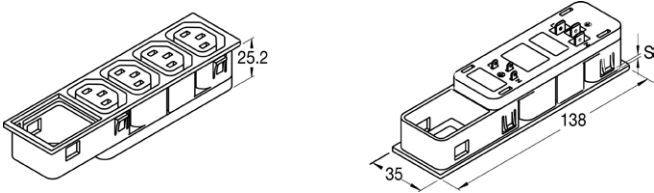

Panel cut-out 134 x 32,5 mm, corner radius max. 5 mm
 With power entry module, type 6200 or type 6220

Variants
[Distributor-Stock-Check](#) | [SCHURTER-Stock-Check](#) | [e-Store](#)

Panel Thickness s [mm]	Terminal	Length [mm]	Length L2 [mm]	Order Number
1	Quick connect terminals 6.3 x 0.8 mm	138	134	4758.3200
1.2	Quick connect terminals 6.3 x 0.8 mm	138	134	4758.8200
1.5	Quick connect terminals 6.3 x 0.8 mm	138	134	4758.4200
2	Quick connect terminals 6.3 x 0.8 mm	138	134	4758.5200
2.5	Quick connect terminals 6.3 x 0.8 mm	138	134	4758.6200
3	Quick connect terminals 6.3 x 0.8 mm	138	134	4758.7200
1	Solder terminals 4 x 0.8 mm	138	134	4758.3400
1.2	Solder terminals 4 x 0.8 mm	138	134	4758.8400
1.5	Solder terminals 4 x 0.8 mm	138	134	4758.4400
2	Solder terminals 4 x 0.8 mm	138	134	4758.5400
2.5	Solder terminals 4 x 0.8 mm	138	134	4758.6400
3	Solder terminals 4 x 0.8 mm	138	134	4758.7400
1	Solder terminals 4 x 0.8 mm and quick connect terminals 6.3 x 0.8 mm	138	134	4758.3000
1.2	Solder terminals 4 x 0.8 mm and quick connect terminals 6.3 x 0.8 mm	138	134	4758.8000
1.5	Solder terminals 4 x 0.8 mm and quick connect terminals 6.3 x 0.8 mm	138	134	4758.4000
2	Solder terminals 4 x 0.8 mm and quick connect terminals 6.3 x 0.8 mm	138	134	4758.5000
2.5	Solder terminals 4 x 0.8 mm and quick connect terminals 6.3 x 0.8 mm	138	134	4758.6000
3	Solder terminals 4 x 0.8 mm and quick connect terminals 6.3 x 0.8 mm	138	134	4758.7000

Please note, all quadblobs are available in protection-class II upon request.

Cord retaining clamp see accessories

Packaging unit

50 Pcs

Required Accessory

Description



6200
IEC Appliance Connector C14 with Fuseholder 1-pole

IP 40, 5 x 20, 1 pole	6200.4120
IP 40, 5 x 20, 1 pole	6200.4220
IP 40, 5 x 20, 1 pole	6200.4320



6220
IEC Appliance Connector C14 with Fuseholder 2-pole

IP 40, 5 x 20, 2-pole	6220.5120
IP 40, 5 x 20, 2-pole	6220.5220
IP 40, 5 x 20, 2-pole	6220.5320

Accessory



Cord retaining kits
Cord retaining strain relieve

Flat head, Z	0888.0021
Flat head, E	4700.0005
Flat head, G	4700.0007
Flat head, H	4700.0008