


IEC appliance outlet F, screw-on mounting, front side, solder /quick connect terminal



Screw-On Version

**Description**

- Panel Mount Screw-on from front side
- Outlet, Pin temperature 70 °C, Protection class I
- Solder terminals or quick connect terminals

Approvals

- VDE License Number: 40009388
- UL License Number: E96454

Other versions on request

- Quick-connect terminals 4.8 x 0.8 mm
- For protection class II

Weblinks

[Approvals](#), [RoHS](#), [CHINA-RoHS](#), [e-Store](#), [SCHURTER-Stock-Check](#), [Distributor-Stock-Check](#)

Technical Data


Ratings IEC	10A / 250VAC; 50Hz
Ratings UL/CSA	15A / 250VAC; 60Hz
Dielectric Strength	> 2 kVAC between L-N > 2 kVAC between L/N-PE (1 min/50Hz)
Allowable Operation Temp.	-25 °C to 70 °C
Degree of Protection	from front side IP 30 acc. to IEC 60529
Protection Class	Suitable for appliances with protection class I acc. to IEC 61140
Terminal	Solder terminals or quick connect terminals Quick connect terminals fulfil not VDE requirements
Panel Thickness s	Screw-on: to 3 mm Mounting screw torque max 0.5 Nm
Material: Housing	Thermoplastic, black, UL 94V-0

Appliance-Inlet/-Outlet	F acc. to IEC/EN 60320-2-2, UL 498, CSA C22.2 no. 42 (for cold conditions) pin-temperature 70 °C, 10A, Protection class I
-------------------------	---

Dimensions

4787

Length |-----| 40 mm

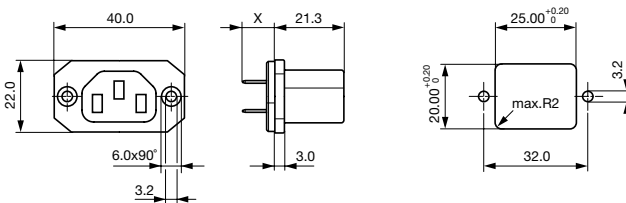

Quick connect terminals 6.3 x 0.8 mm: x = 11.2 mm

Quick connect terminals 4.8 mm: x = 9.8mm

Distributor-Stock-Check | SCHURTER-Stock-Check | e-Store

Variants[Distributor-Stock-Check](#) | [SCHURTER-Stock-Check](#) | [e-Store](#)

Type	Panel mounting	Panel Thickness s [mm]	Terminal	Order Number
4787	Screw-on	-	Quick connect terminals 4.8 x 0.8 mm	4787.2000
4787	Screw-on	-	Quick connect terminals 6.3 x 0.8 mm	4787.1000

Please consider the min. required spacing between life parts and possible conductive panel

Class II products also available on request [4788]

Packaging unit 100 Pcs
