


IEC appliance outlet F, screw-on mounting, front side, solder/quick connect terminal



6600-3



### Description

- Panel Mount:  
Screw-on from front side
- Outlet, Pin temperature 70 °C, Protection class I
- Solder terminals or quick connect terminals

### Approvals

- VDE License Number: 40017345
- UL License Number: E103791
- CSA License Number: 38456

### Other versions on request

- Types for rivet mounting available upon request
- Types for enhanced glow wire test requirements acc. IEC 60695-2-11 to -13 for the use in unattended household equipment acc. IEC 60335-1

### Weblinks

[Approvals](#), [RoHS](#), [CHINA-RoHS](#), [e-Store](#), [SCHURTER-Stock-Check](#), [Distributor-Stock-Check](#)

### Technical Data


Ratings IEC	10A / 250VAC; 50 Hz
Ratings UL/CSA	15A / 250VAC; 60 Hz
Dielectric Strength	> 2kVAC between L-N > 2kVAC between L/N-PE (1 min/50Hz)
Allowable Operation Temp.	-25 °C to 70 °C
Degree of Protection	from front side IP 30 acc. to IEC 60529
Protection Class	Suitable for appliances with protection class I acc. to IEC 61140
Terminal	Solder terminals or quick connect terminals
Panel Thickness s	Screw-on: max 8 mm Mounting screw torque max 0.5Nm
Material: Housing	Thermoplastic, black, UL 94V-0

Appliance-Inlet/-Outlet	F acc. to IEC/EN 60320-2-2, UL 498, CSA C22.2 no. 42 (for cold conditions) pin-temperature 70 °C, 10A, Protection class I
-------------------------	---

### Dimensions

6600-3

Length |-----| 50 mm

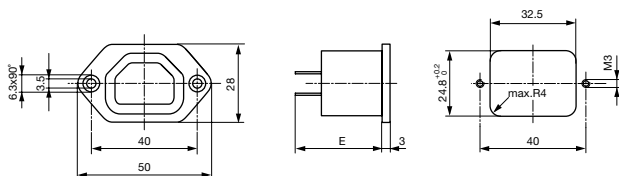

- E = solder terminals 3.5x0.8mm 24.1 mm
- E = quick connect terminals 4.8x0.8mm 26.5 mm
- E = quick connect terminals 6.3x0.8mm 27.5 mm

Distributor-Stock-Check | SCHURTER-Stock-Check | e-Store

## Variants

Panel mounting	Panel Thickness s [mm]	Terminal	Order Number
Screw-on	-	Quick connect terminals 4.8 x 0.8 mm	6600.3200
Screw-on	-	Quick connect terminals 6.3 x 0.8 mm	6600.3300
Screw-on	-	Solder terminals 3.8 x 0.8 mm	6600.3100

Articles for enhanced glow wire test requirements acc. IEC 60695-2-11 to -13 can be ordered with ending ".15" (xxxx.xxxx.15). They are suitable for the use in unattended household equipment acc. IEC 60335-1.

**Packaging unit** 50 Pcs

## Accessory

## Description



Assorted Covers  
Rear Cover

0859.0047



Cord retaining kits  
Cord retaining strain relieve

Flat head, E

4700.0005

Flat head, G

4700.0007

## Mating Inlet/Plug

## Category / Description

## plug connector



IEC plug connector E, rewirable, straight, max. cable diameter 8.5 mm

4732

IEC plug connector E, rewirable, angled, max. cable diameter 10 mm

4733

IEC plug connector E, rewirable, straight, max. cable diameter 10 mm

4735

IEC plug connector E, rewirable, angled, max. cable diameter 10 mm

4736

IEC plug connector E, rewirable, straight

9009

IEC plug connector E, rewirable, angled

9013

IEC plug connector E, rewirable, angled

P685

## power interconnection cord



Power Cord with IEC Appliance Plug E, angled, 70°C

0607

Power Cord with IEC Appliance Plug E, angled, 70°C

0608

Power Cord with IEC Appliance Plug E, straight, 70°C

0609

Power Cord with IEC Appliance Plug G, angled, 70°C

607B

Power Cord with IEC Appliance Plug G, angled, 70°C

608B

Power Cord with IEC Appliance Plug G, straight, 70°C

609B