


IEC appliance outlet F shuttered, screw-on mounting, front side, solder/quick connect terminal



Screw-On Version

**Description**

- Panel Mount Screw-on from front side
- Outlet shuttered, Protection class I, Pin temperature 70 °C
- Solder terminals or quick connect terminals

**Approvals**

- VDE License Number: 40010659
- UL License Number: E96454

**Other versions on request**

- For protection class II

**Weblinks**

[Approvals](#), [RoHS](#), [CHINA-RoHS](#), [e-Store](#), [SCHURTER-Stock-Check](#), [Distributor-Stock-Check](#)

**Technical Data**


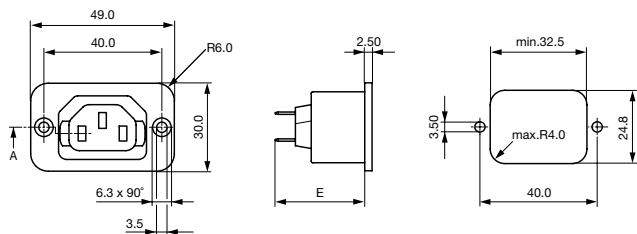

Ratings IEC	10A / 250VAC; 50Hz
Ratings UL/CSA	15A / 250VAC; 60Hz
Dielectric Strength	> 2kVAC between L-N > 2kVAC between L/N-PE (1 min/50Hz)
Allowable Operation Temp.	-25°C to 70°C
Degree of Protection	from front side IP 30 acc. to IEC 60529
Protection Class	Suitable for appliances with protection class I acc. to IEC 61140
Terminal	Solder terminals or quick connect terminals
Panel Thickness s	Screw-on: max 8 mm Mounting screw torque max 0.5Nm
Material: Housing	Thermoplastic, black, UL 94V-0

Appliance-Inlet/-Outlet	F acc. to IEC/EN 60320-2-2, UL 498, CSA C22.2 no. 42 (for cold conditions) pin-temperature 70 °C, 10A, Protection class I
-------------------------	------------------------------------------------------------------------------------------------------------------------------

**Dimensions**

4721

Length |-----| 49 mm

Shutter operation:  
shutters opened by plug insertionShutter operation:  
shutters closed when plug is removed

- E: Solder terminals 3.5 x 0.8 mm: 28.4 mm
- E: Quick connect terminals 4.8 x 0.8 mm: 31.1 mm
- E: Quick connect terminal 6.3 x 0.8 mm: 33.2 mm

[Distributor-Stock-Check](#) | [SCHURTER-Stock-Check](#) | [e-Store](#)

## Variants

[Distributor-Stock-Check](#) | [SCHURTER-Stock-Check](#) | [e-Store](#)

Type	Panel mounting	Panel Thickness s [mm]	Terminal	Order Number
4721	Screw-on	-	Quick connect terminals 4.8 x 0.8 mm	4721.0100
4721	Screw-on	-	Quick connect terminals 6.3 x 0.8 mm	4721.0000
4721	Screw-on	-	Solder terminals 3.8 x 0.8 mm	4721.0300

Class II product also available on request

Cord retaining clamps and insulation covers see accessories

**Packaging unit** 100 Pcs

## Accessory

## Description



[Assorted Covers](#)  
Rear Cover

0859.0047



[Cord retaining kits](#)  
Cord retaining strain relieve

Countersunk, D  
Countersunk, F

4700.0004  
4700.0006