


Stripp Block for Snap Mounting with 4 IEC Appliance Outlets C14



Snap-In Version

**Description**

- Panel Mount:
Snap-In Version from front side
- 2 Functions:
Module of 4 outlets, Pin temperature 70 °C, Protection class I
- Solder terminals or quick connect terminals

Approvals

- CSA License Number: 56242

Characteristics

- Busbar is of single piece (no soldering)
- Insulation cover on the rear-side
- Qualified for use in equipment according IEC/EN 60950

Other versions on request

- For protection class II

Weblinks


[Approvals](#), [RoHS](#), [CHINA-RoHS](#), [e-Store](#), [SCHURTER-Stock-Check](#), [Distributor-Stock-Check](#)

Technical Data

Ratings IEC	10A / 250VAC; 50Hz	Appliance-Inlet/-Outlet	F acc. to IEC/EN 60320-2-2,
Ratings UL/CSA	15A / 250VAC; 60Hz		UL 498 CSA C22.2 no. 42 (for cold
Dielectric Strength	> 2 kVAC between L-N > 2 kVAC between L/N-PE (1 min/50Hz)		conditions) pin-temperature 70 °C, 10A,
Allowable Operation Temp.	-25 °C to 70 °C		Protection class I
Degree of Protection	from front side IP 30 acc. to IEC 60529		
Protection Class	Suitable for appliances with protection class I acc. to IEC 61140		
Terminal	Solder terminals or quick connect terminals		
Panel Thickness s	Snap-in/1.2/1.5/2/2.5/3 mm tolerance +0.0/-0.1		
Material: Housing	Thermoplastic, black, UL 94V-0		

Dimensions

Quadbloc 4752

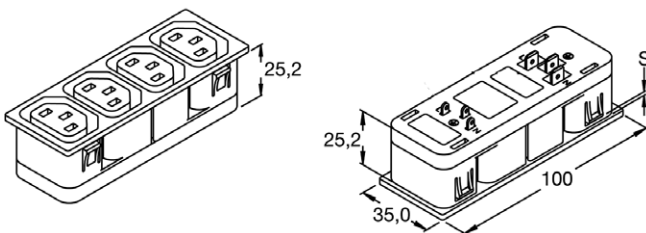

Panel cut-out 96,2 x 32,5 mm, corner radius max. 1 mm

Variants

Distributor-Stock-Check | SCHURTER-Stock-Check | e-Store

Panel Thickness [mm]	Terminal	Length [mm]	Length L2 [mm]	Order Number
1	Quick connect terminals 6.3 x 0.8 mm	100	96.2	4752.3200
1.2	Quick connect terminals 6.3 x 0.8 mm	100	96.2	4752.8200
1.5	Quick connect terminals 6.3 x 0.8 mm	100	96.2	4752.4200
2	Quick connect terminals 6.3 x 0.8 mm	100	96.2	4752.5200
2.5	Quick connect terminals 6.3 x 0.8 mm	100	96.2	4752.6200
3	Quick connect terminals 6.3 x 0.8 mm	100	96.2	4752.7200
1	Solder terminals 4 x 0.8 mm	100	96.2	4752.3400
1.2	Solder terminals 4 x 0.8 mm	100	96.2	4752.8400
1.5	Solder terminals 4 x 0.8 mm	100	96.2	4752.4400
2	Solder terminals 4 x 0.8 mm	100	96.2	4752.5400
2.5	Solder terminals 4 x 0.8 mm	100	96.2	4752.6400
3	Solder terminals 4 x 0.8 mm	100	96.2	4752.7400
1	Solder terminals 4 x 0.8 mm and quick connect terminals 6.3 x 0.8 mm	100	96.2	4752.3000
1.2	Solder terminals 4 x 0.8 mm and quick connect terminals 6.3 x 0.8 mm	100	96.2	4752.8000
1.5	Solder terminals 4 x 0.8 mm and quick connect terminals 6.3 x 0.8 mm	100	96.2	4752.4000
2	Solder terminals 4 x 0.8 mm and quick connect terminals 6.3 x 0.8 mm	100	96.2	4752.5000
2.5	Solder terminals 4 x 0.8 mm and quick connect terminals 6.3 x 0.8 mm	100	96.2	4752.6000
3	Solder terminals 4 x 0.8 mm and quick connect terminals 6.3 x 0.8 mm	100	96.2	4752.7000

Please note, all quadblocs are available in protection-class II upon request.

Cord retaining clamp see accessories

Packaging unit

50 Pcs

Accessory

Description



Cord retaining kits

Cord retaining strain relieve

Flat head, E	4700.0005
Flat head, G	4700.0007