


Distribution Unit for Snap Mounting with 1 IEC Appliance Connector C14 and 1 Plug F



Snap-In Version

**Description**

- Panel Mount:
Snap-In Version from front side
- 2 Functions:
Inlet, Outlet, Pin temperature 70 °C, Protection class I

Approvals

- VDE License Number: 105576
- UL License Number: E103791
- CSA License Number: 73165

Characteristics

- Qualified for use in equipment according IEC/EN 60950


Weblinks

[Approvals](#), [RoHS](#), [CHINA-RoHS](#), [e-Store](#), [SCHURTER-Stock-Check](#), [Distributor-Stock-Check](#)


Technical Data

Ratings IEC	10A / 250VAC; 50Hz
Ratings UL/CSA	10A / 125VAC; 60Hz
Dielectric Strength	> 2kVAC between L-N > 2kVAC between L/N-PE (1 min/50Hz)
Allowable Operation Temp.	-25 °C to 70 °C
Degree of Protection	from front side IP 30 acc. to IEC 60529
Protection Class	Suitable for appliances with protection class I acc. to IEC 61140
Terminal	Quick connect terminals 4.8 x 0.8 mm Solder terminal on request
Panel Thickness s	Snap-in 0.8mm to 2mm
Material: Housing	Thermoplastic, black, UL 94V-0


Appliance-Inlet/-Outlet	C14 acc. to IEC/EN 60320-1, F acc. to IEC/EN 60320-2-2, UL 498 CSA C22.2 no. 42 (for cold conditions) pin-temperature 70 °C, 10A, Protection class I
-------------------------	--

Dimensions

$$A = 1,3 - 2: X = 50,5 + 0,1$$

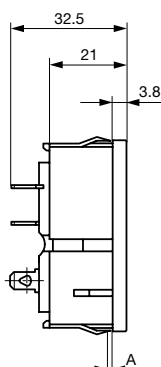

$$A = 0,8 - 1,2: X = 50,3 + 0,1$$

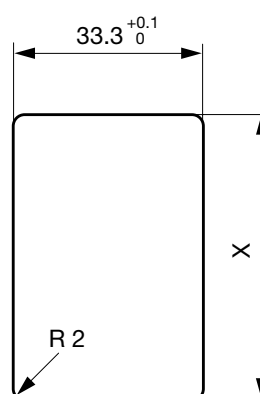**Variants**

Type	Order Number
0712	4300.0301

[Distributor-Stock-Check](#) | [SCHURTER-Stock-Check](#) | [e-Store](#)

Packaging unit 50 Pcs