

IEC cord connector C19, rewirable, straight



4795

C19



70 °C

**Description**

- Connector:  
Screw-on
- Outlet, Pin temperature 70 °C, Protection class I
- Cable

**Approvals**

- VDE License Number: 40009206
- UL License Number: E103791
- CSA License Number: 205419

**Characteristics**

- Qualified for use in equipment according IEC/EN 60950

**Weblinks**

[Approvals](#), [RoHS](#), [CHINA-RoHS](#), [e-Store](#), [SCHURTER-Stock-Check](#), [Distributor-Stock-Check](#)

**Technical Data**

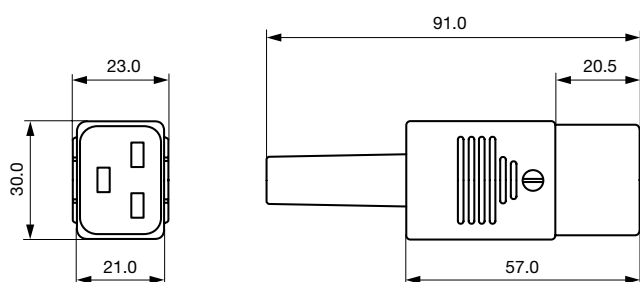
Ratings IEC	16 A / 250 VAC; 50 Hz
Ratings UL/CSA	21 A / 250 VAC; 60 Hz
Dielectric Strength	> 2 kVAC between L-N > 2 kVAC between L/N-PE (1 min/50 Hz)
Allowable Operation Temp.	-25 °C to 70 °C
Protection Class	Suitable for appliances with protection class I acc. to IEC 61140
Terminal	Cable
Material: Housing	Thermoplastic, black, UL 94V-0

Appliance-Inlet/-Outlet	C19 acc. to IEC/EN 60320-1, UL 498, CSA C22.2 no. 42 (for cold conditions) pin-temperature 70 °C, 16A, Protection class I
-------------------------	--

**Dimensions**

4795

Length |-----| 30 mm

**Variants**
[Distributor-Stock-Check](#) | [SCHURTER-Stock-Check](#) | [e-Store](#)

Color	Max. cable diameter	Max. wire size	Order Number
black	10.0 mm	3 x 2.1 mm <sup>2</sup> / 3 x 14 AWG	4795.0000

Max. torque for screws: Terminal: 0.5 Nm, Cable clamp: 0.3 Nm, Cover: 0.3 Nm

Cord retaining clamp see accessories

**Packaging unit**

100 Pcs

**Accessory****Description****Cord retaining kits**

Cord retaining strain relieve

Flat head, H	4700.0008
Countersunk, K	4700.0010
Flat head, L	4700.0011