
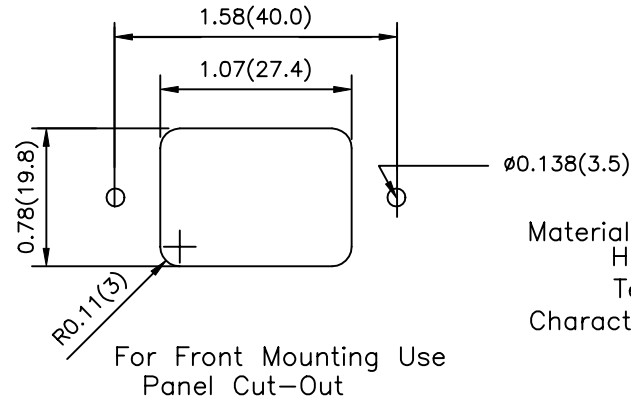


| Revision | | | |
|----------|-------------|------|----------|
| Rev. | Description | Date | Approved |
| | | | |
| | | | |
| | | | |




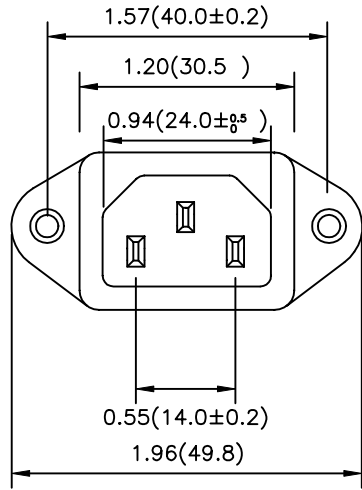


Material:
Housing: Thermoplastic, UL94V0(Max temp 120°C)
Terminal: Copper Alloy

Characteristics:
Rating: 10A 250V AC / 15A 250VAC AC
Insulation Resistance: Over 100 OHM 500V DC
Dielectric Strength: 2000V AC One Minute

Approvals:
UL, CSA, VDE, SEV, CB, SEMKO, DEMKO, NEMKO,
and SETI

Noncountersink 6.3mm

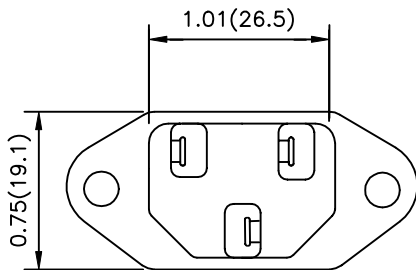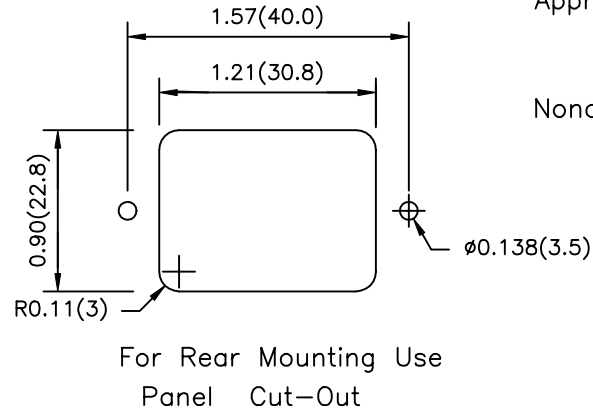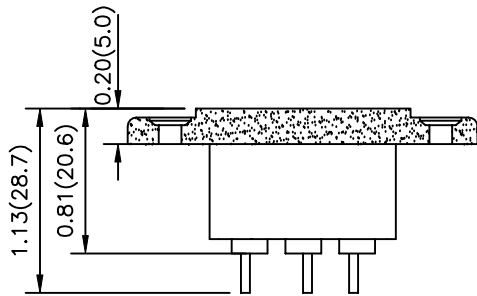

| | | | | |
|----------------|--------------------|---|------------|--------------|
| Dim range (mm) | Tolerance +/- (mm) | Qualtek Electronics Corp. PPC DIVISION | | |
| | | Part Number: 703W-00/04 | | |
| 0-1 | 0.15 | Description: | | |
| 1-6 | 0.20 | AC RECEPTACLES | | |
| 6-18 | 0.30 | Unit: mm | Rev A | |
| 18-50 | 0.50 | | Drawn/Date | Checked/Date |
| 50-120 | 0.70 | B.ZHANG | | |
| 120-250 | 0.90 | 04-23-03 | | |
| 250-500 | 1.20 | | | |