


THESE DRAWINGS ARE THE PROPERTY OF QUALTEK ELECTRONICS AND NOT TO BE REPRODUCED FOR OR COMMUNICATED TO A THIRD PARTY WITHOUT THE EXPRESS WRITTEN PERMISSION OF AN OFFICER OF QUALTEK ELECTRONICS.

REVISION			
REV.	DESCRIPTION	DATE	APPROVED
B	RoHS Compliancy	06-01-06	DP

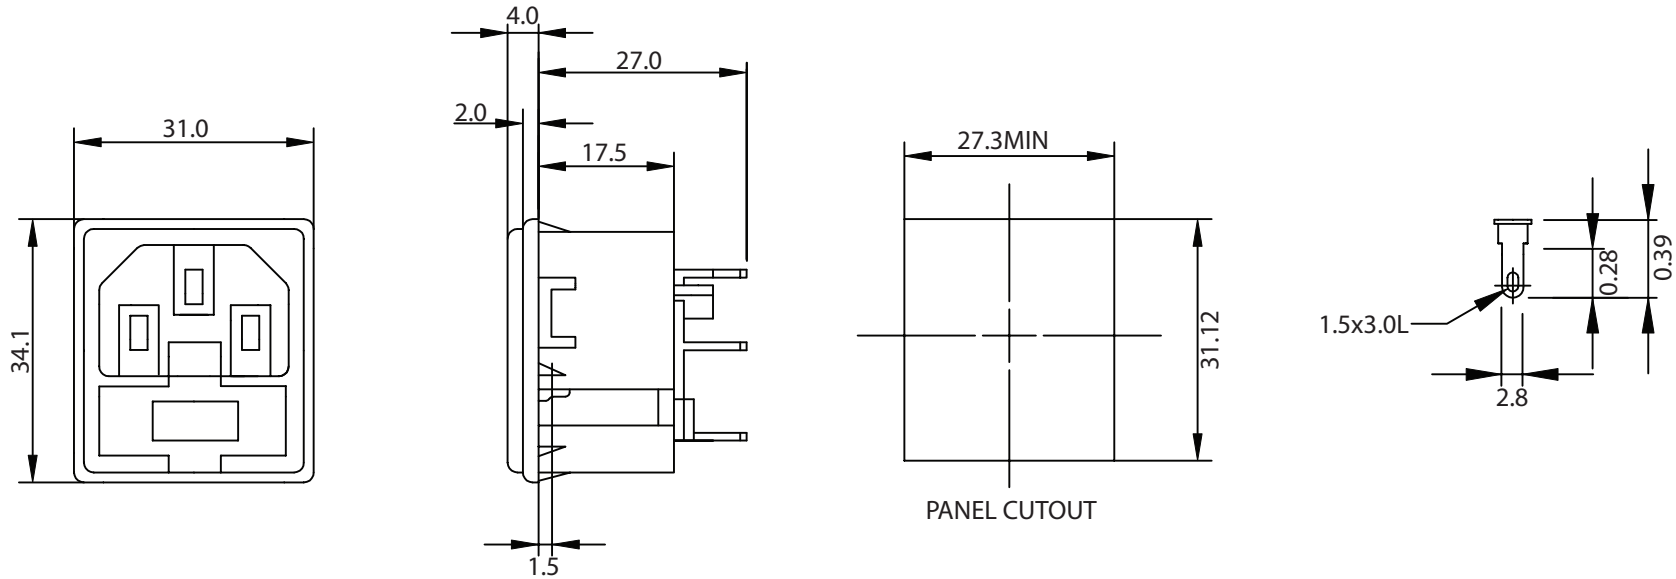

**NOTES:**

**MATERIAL:**

MOULDING: NYLON, FLAMMABILITY RATING U.L. 94V-0  
 CONTACTS: BRASS, PINS NICKEL PLATED, TAGS TIN PLATED  
 RATING: 10A 250V AC  
 INSULATION RESISTANCE:  $>10^3$  M OHM  
 CONTACT RESISTANCE:  $<10$  m OHM 9 $<15$  OHM INCLUDING FUSEHOLDER  
 A.C. BREAKDOWN:  
   POLE-POLE: 5.5kV  
   POLES-PANEL: 4.0kV  
 OPERATING TEMPERATURE: -40° C TO +70° C  
 MAX. PIN TEMPERATURE: +65° C  
 APPROVALS: UL, CSA, VDE  
 DUAL FUSE HOLDER, ONE ACTIVE, ONE SPARE  
 FUSES NOT INCLUDED - RECOMMENDED SIZE: 5 X 20mm  
 PANEL THICKNESS: 1.5mm  
 RoHS COMPLIANT

**CONTROLLED**

Dim range (mm)	Tolerance +/- (mm)	Qualtek Electronics Corp. PPC DIVISION		
		Part Number:	723-15/28	RoHS Compliant
0-1	0.15	Description: AC RECEPTACLE		
1-6	0.20			
6-18	0.30	UNIT: mm	REV. B	
18-50	0.50		Approved / Date	
50-120	0.70	Drawn / Date	Checked / Date	Approved / Date
120-250	0.90	B.Zhang 05-17-04	05-17-04	JJH / 05-17-04
250-500	1.20			