
THESE DRAWINGS ARE THE PROPERTY OF QUALTEK ELECTRONICS AND NOT TO BE REPRODUCED FOR OR COMMUNICATED TO A THIRD PARTY WITHOUT THE EXPRESS WRITTEN PERMISSION OF AN OFFICER OF QUALTEK ELECTRONICS.

| REVISION | | | | | | |
|----------|-----------------|----------|----------|--|--|--|
| REV. | DESCRIPTION | DATE | APPROVED | | | |
| В | RoHS Compliancy | 06-01-06 | DP | | | |
| | | | | | | |
| | | | | | | |

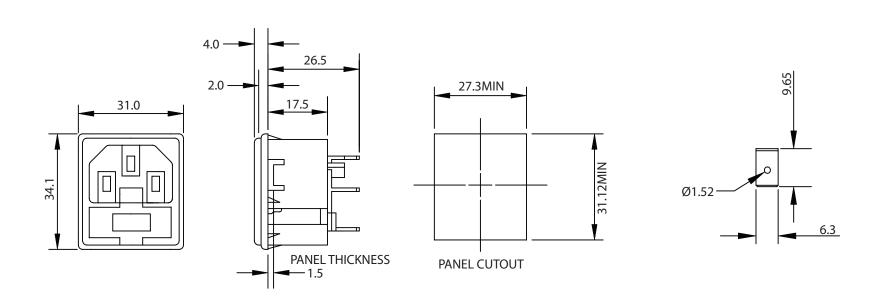

NOTES:

MAX RATING: 10A 250V AC

CONTACT RESISTANCE: <10 m OHM 9<15 OHM INCLUDING FUSEHOLDER

INSULATION RESISTANCE: >10 ³ M OHM A.C. BREAKDOWN: POLE-POLE 5.5kV. POLES-PANEL 4.0kV

OPERATING TEMPERATURE: -40 °C TO 70 °C

MAX.PIN TEMPERATURE: +65 °C

MATERIALS: NYLON, FLAMMABILITY RATING UL 94 V-0 CONTACTS: BRASS, PINS NICKEL PLATED, TAGS TIN PLATED

DUAL FUSE HOLDER, ONE ACTIVE, ONE SPARE

FUSES NOT INCLUDED - RECOMMENDED SIZE: 5 X 20mm

RoHS COMPLIANT

CONTROLLED

| Dim range | Tolerance +/- | Qualtek Electronics Corp. PPC DIVISION | | |
|--------------|------------------|--|----------------|-------------------|
| (mm) | (mm) | Part Number: | 723-15/63 | RoHS Compliant |
| 0-1 | 0.15 | Description: SNAP-IN INLET WITH FUSEHOLDER | | |
| 1-6 | 0.20 | | | |
| 6-18 | 0.30 | | | 051/0 |
| 18-50 | 0.50 | | UNIT: mm | REV. B |
| 50-120 | 0.70 | Drawn / Date | Checked / Date | Approved / Date |
| 120-250 | 0.90 | B.Zhang | 01-22-03 | JJH / 01-22-03 |
| 250-500 | 1.20 | 01-22-03 | 01-22-03 | 3311/01-22-03 |