
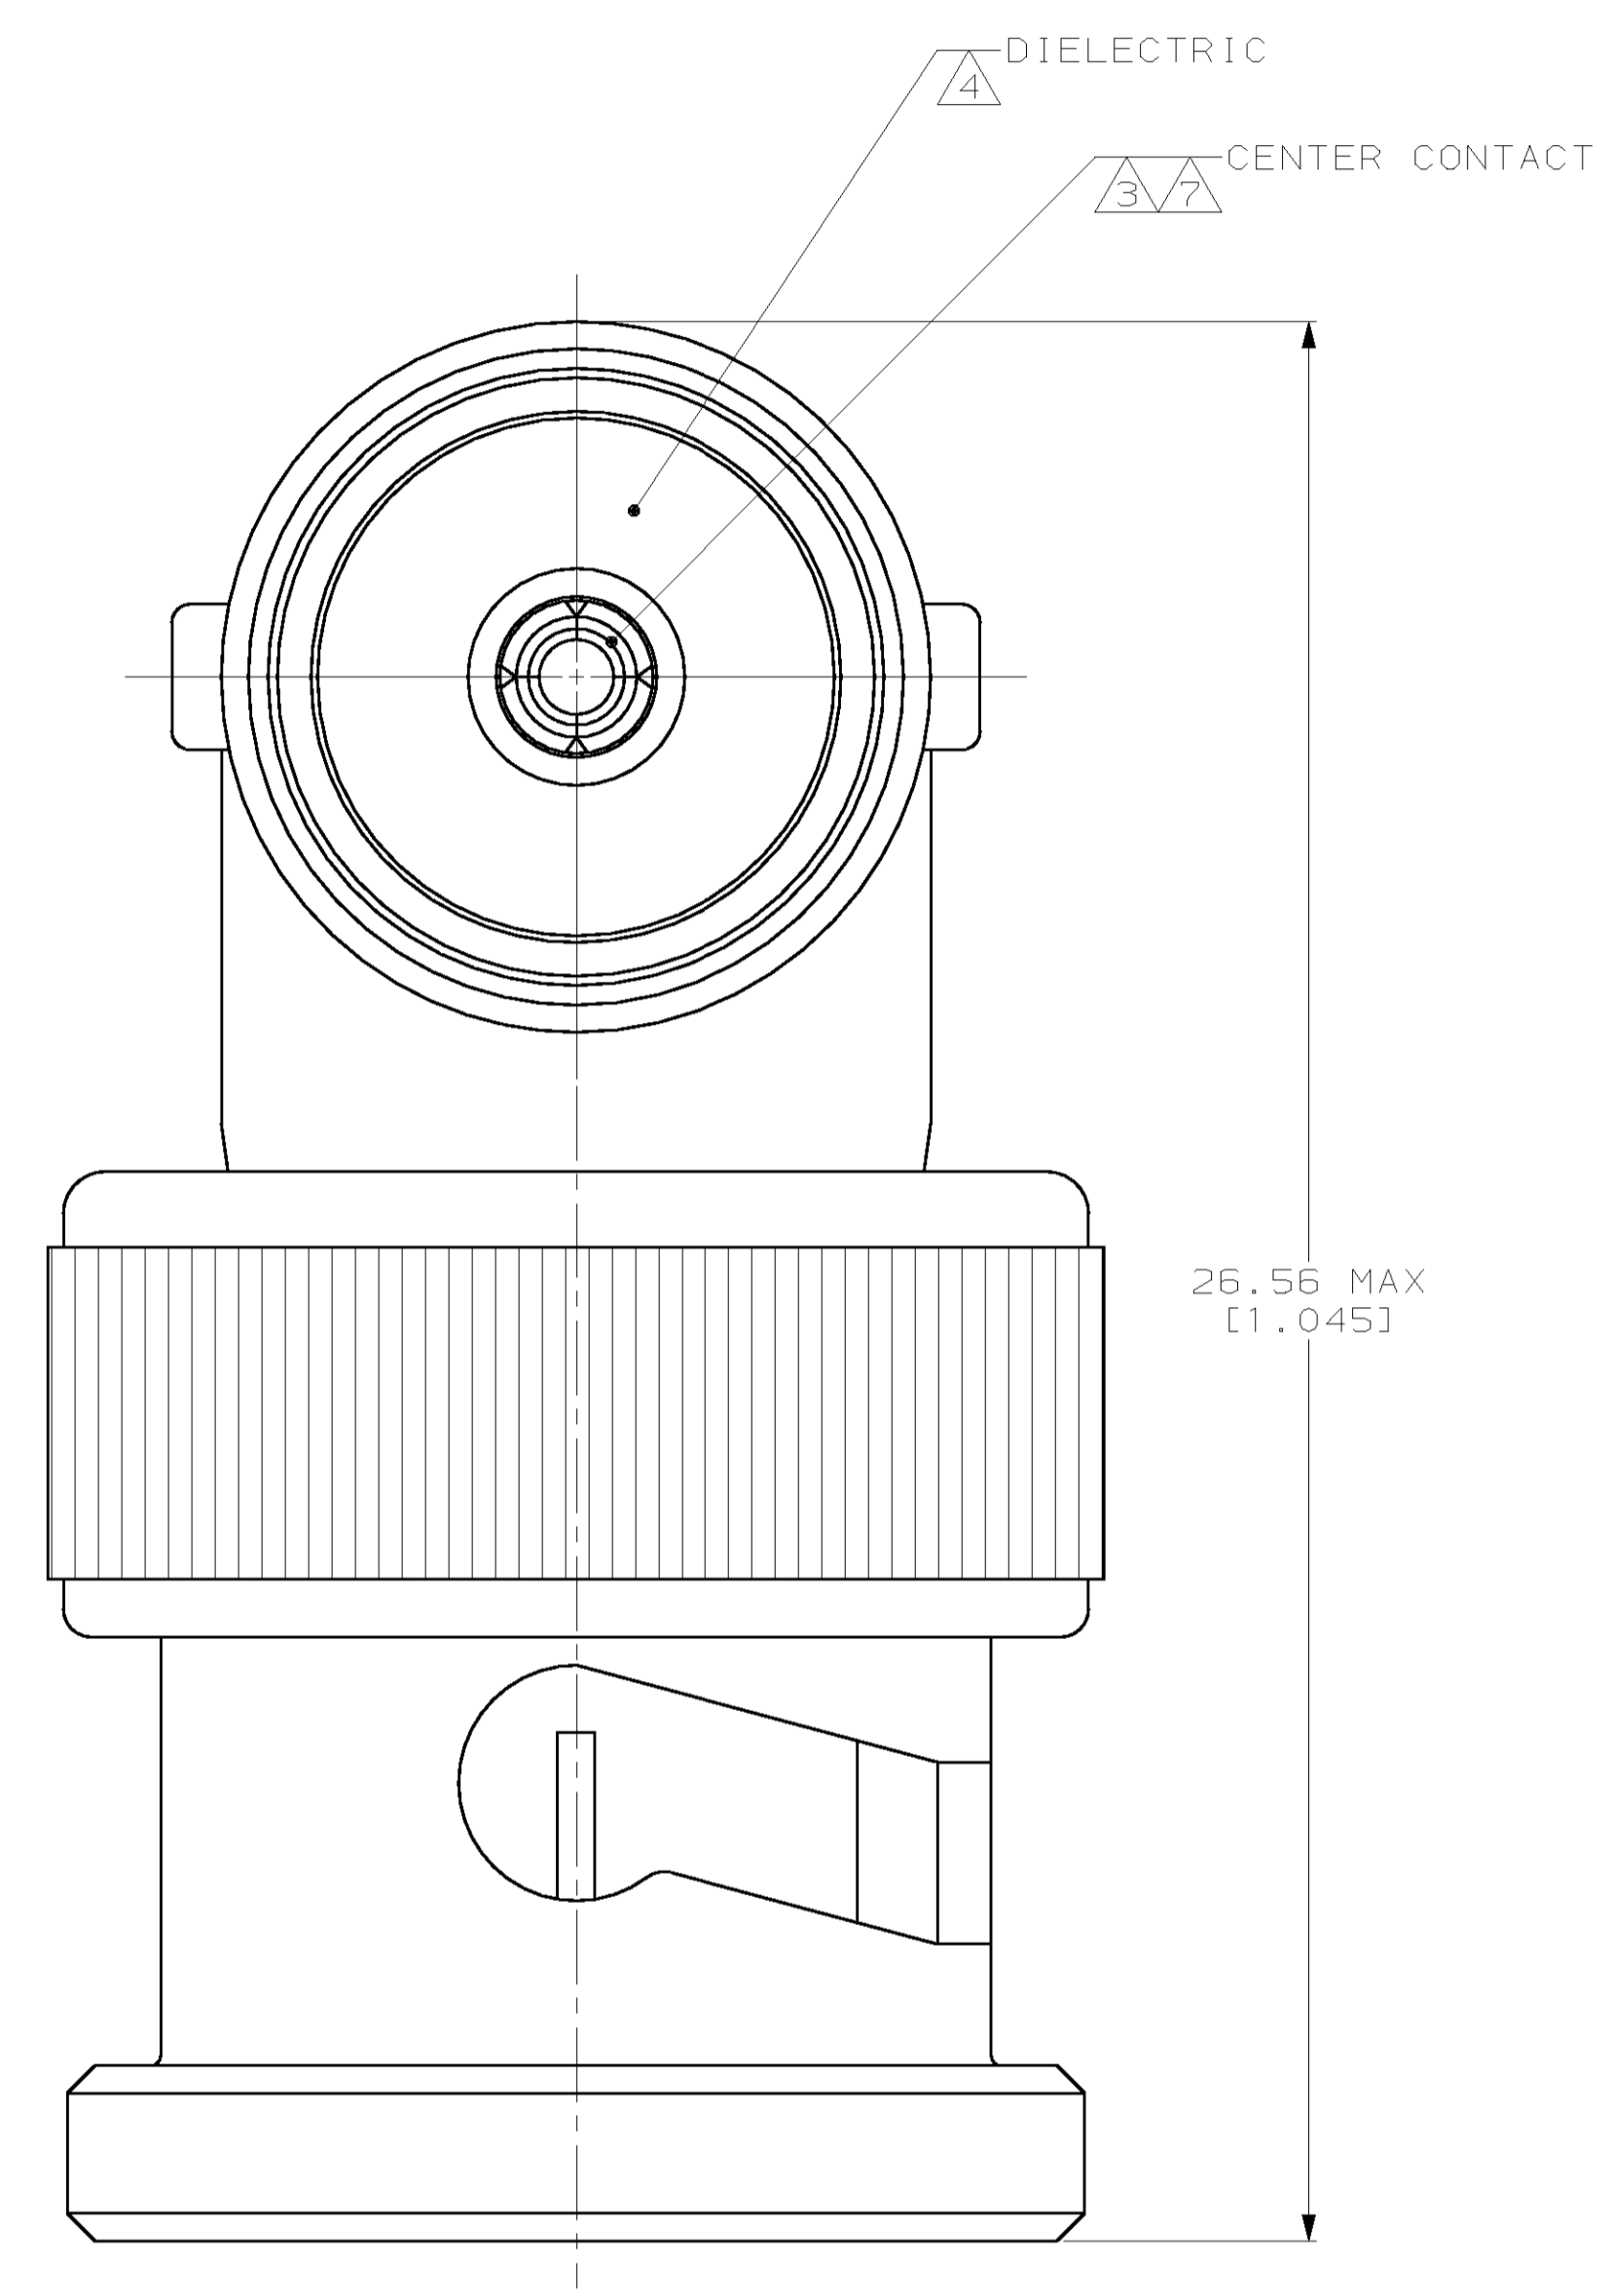


LOC	QTY	REV	DATE	BY	APPV
AJ	16	A	04APR01	MO	JL

- REVISIONS
- | REV | DESCRIPTION          | DATE    | BY | APPV |
|-----|----------------------|---------|----|------|
| A   | REV PER OU20-0200-01 | 04APR01 | MO | JL   |
- 1 CARBON STEEL PER ASTM-A-108
  - 2 BRASS PER ASTM-B-16
  - 3 PHOSPHOR BRONZE PER ASTM-B-139
  - 4 POLYMETHYLPENTENE: GENERAL PURPOSE
  - 5 SILICONE RUBBER PER ZZ-R-765
  - 6 ZINC DIE CAST PER ASTM-B-86
  - 7 GOLD PLATE PER MIL-G-45204, 0.76µm [.000030] MIN THICKNESS
  - 8 NICKEL PLATE PER QQ-N-290, 1.27µm [.000050] MIN THICKNESS
  - 9 NICKEL PLATE PER QQ-N-290, 2.54µm [.000100] MIN THICKNESS

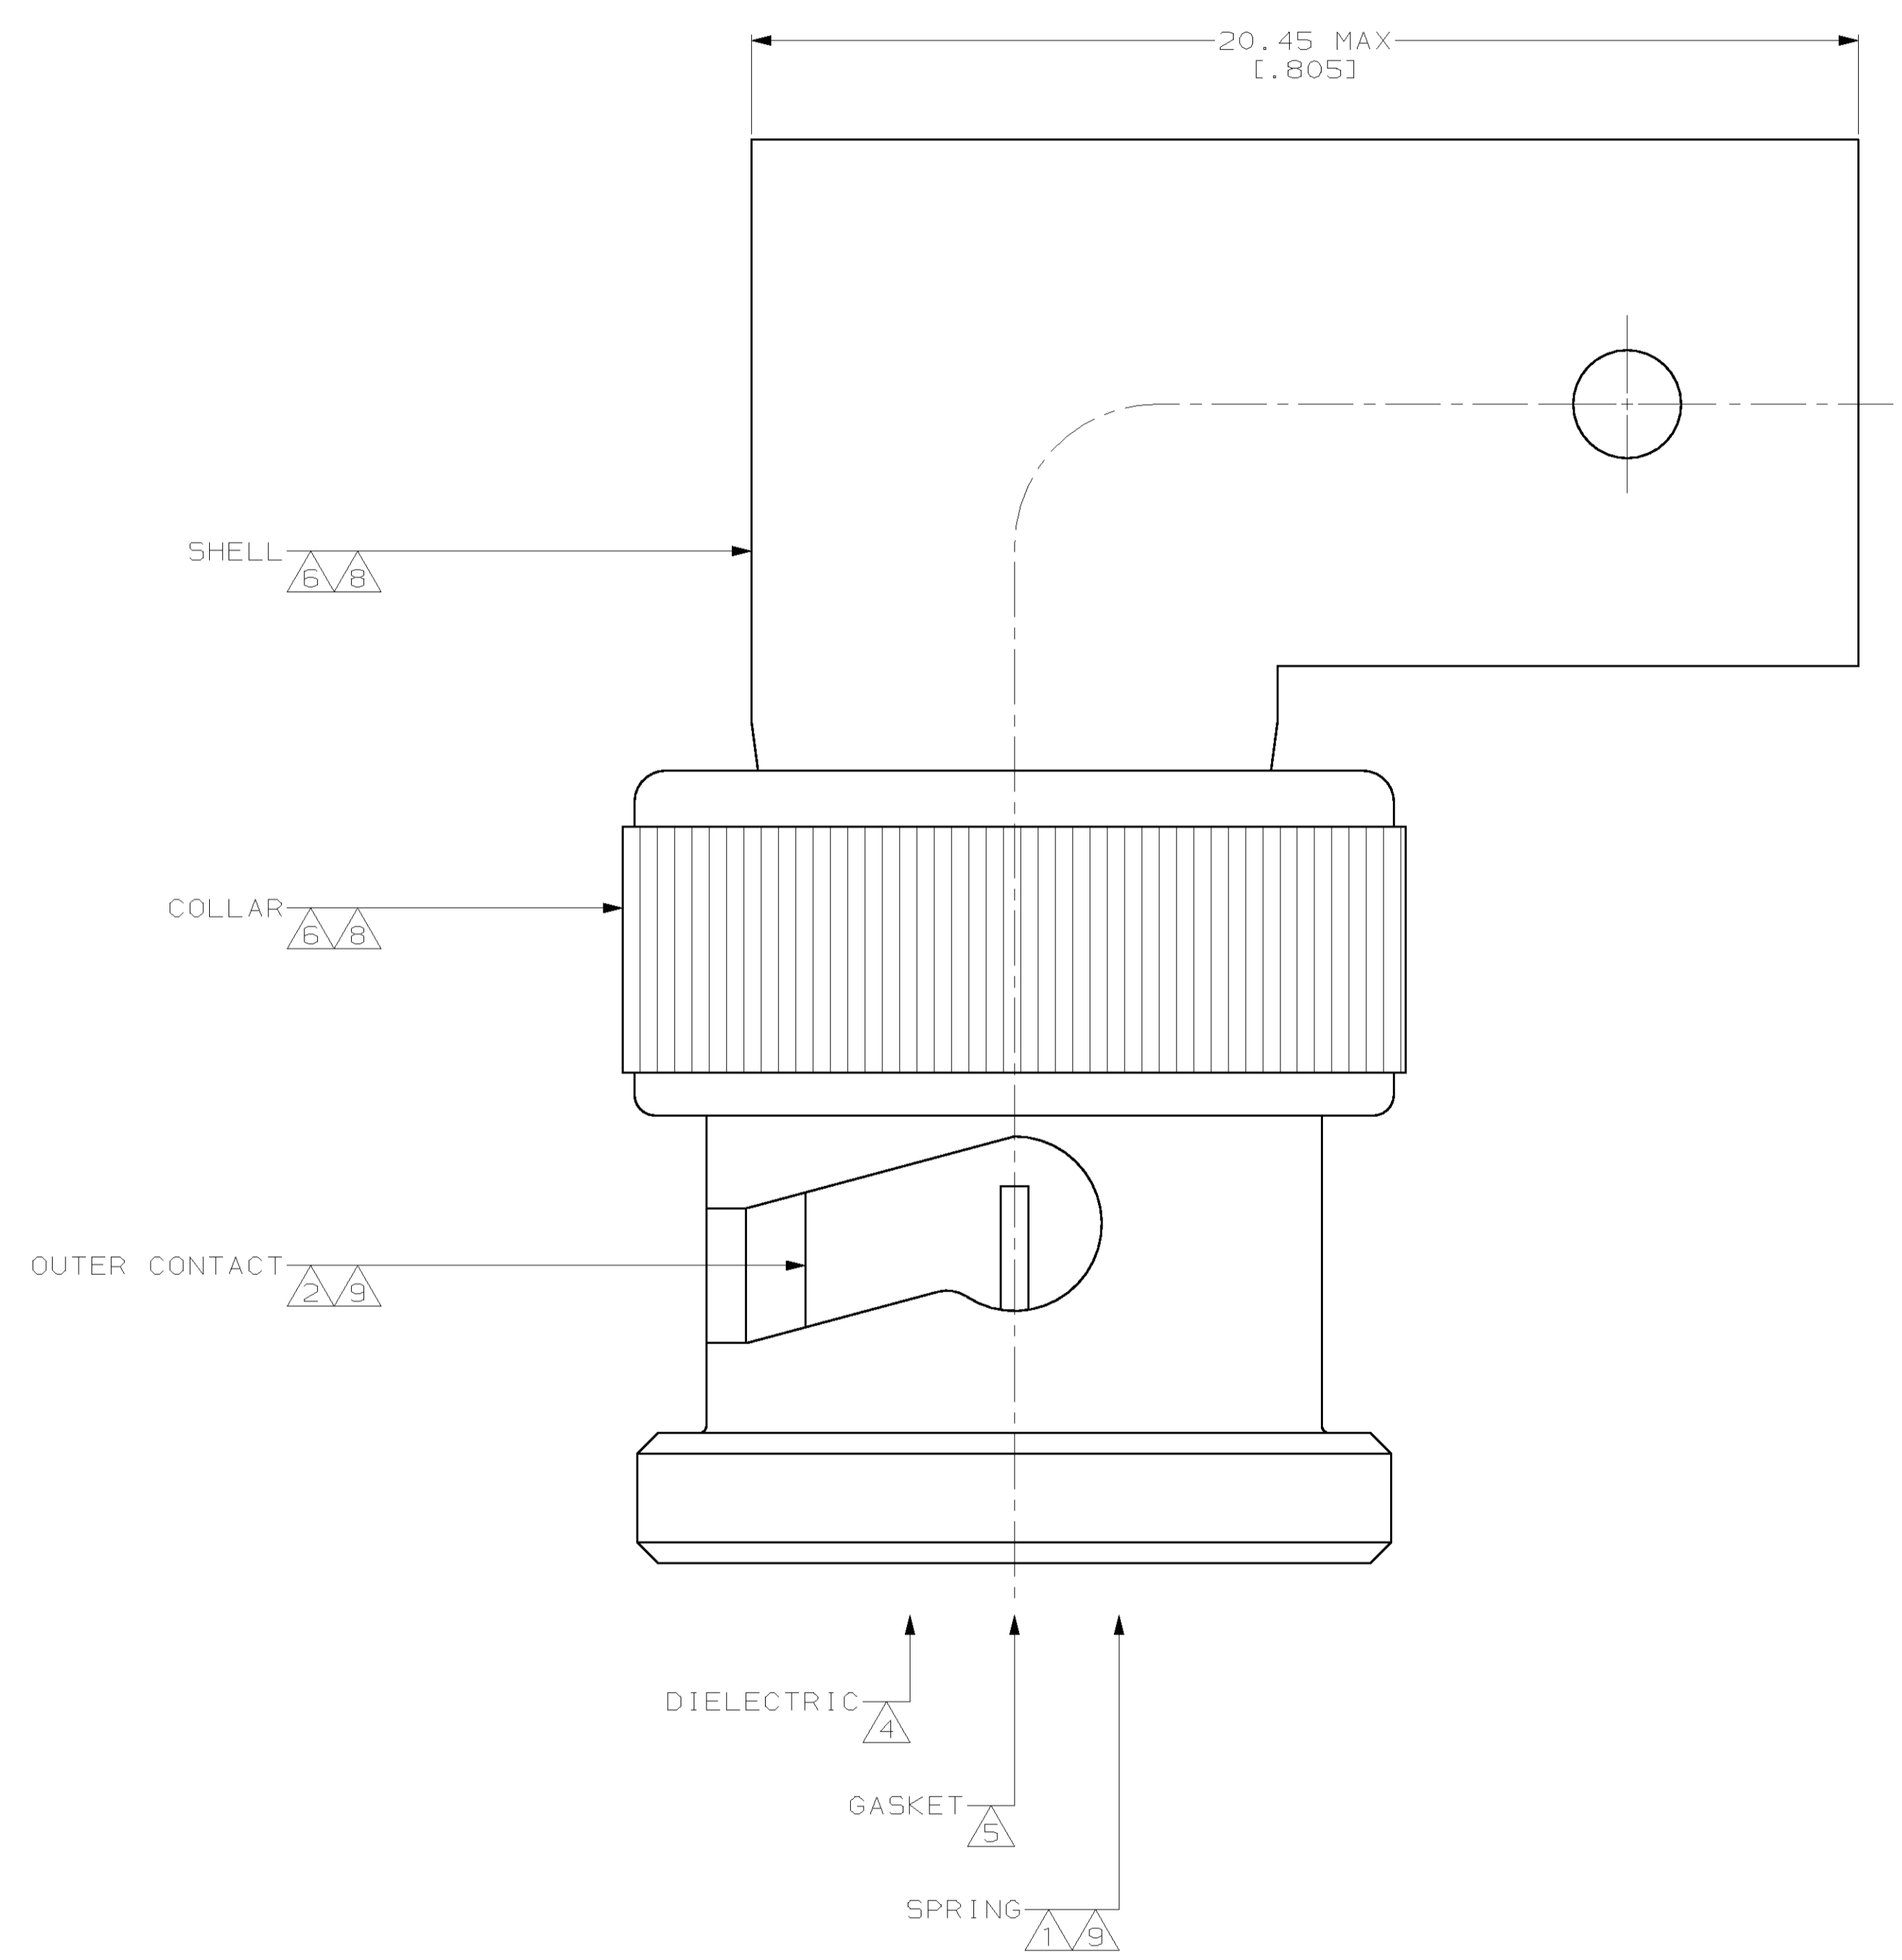

415020-1  
PART NUMBER

<small>THIS DRAWING IS A CONTROLLED DOCUMENT AND IS UNPUBLISHED. IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.</small>		DWG: M. E. COWHER CHK: M. J. PHILLIPS APPV: M. J. PHILLIPS	OBR4995 OBR4995 OBR4995	<b>AMP</b> AMP Incorporated Harrisburg, PA 17105-3608
DIMENSIONS: mm (INCHES)	TOLERANCES UNLESS OTHERWISE SPECIFIED: D PLC ±.01 F PLC ±.01 G PLC ±.01 H PLC ±.01 ANGLES ±.5°	PRODUCT SPEC: 108-12096 APPLICATION SPEC:	SIZE: A1 CAGE CODE: 00779 DRAWING NO: C-415020	SCALE: 10:1 SHEET: 1 OF 1 REV: A
MATERIAL: SEE NOTES	FINISH: SEE NOTES	WEIGHT: -	CUSTOMER DRAWING	