


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION, 19 .  
 © COPYRIGHT 19 BY AMP INCORPORATED. ALL INTERNATIONAL RIGHTS RESERVED.

LOC	DIST	P	F	ZONE	LTR	DESCRIPTION	DATE	APPD
AJ	16				C	OBS -2 PER 0U20-0072-01	16APR01	M0

- ① PHOSPHOR BRONZE PER QQ-B-750
- ② ZINC PER QQ-Z-363
- ③ POLYMETHYLPENTENE: GENERAL PURPOSE
- ④ NICKEL PLATE PER QQ-N-290, 3.81µm [.000150] MIN THICKNESS
- ⑤ GOLD PLATE PER MIL-G-45204, 0.38µm [.000015] MIN THICKNESS

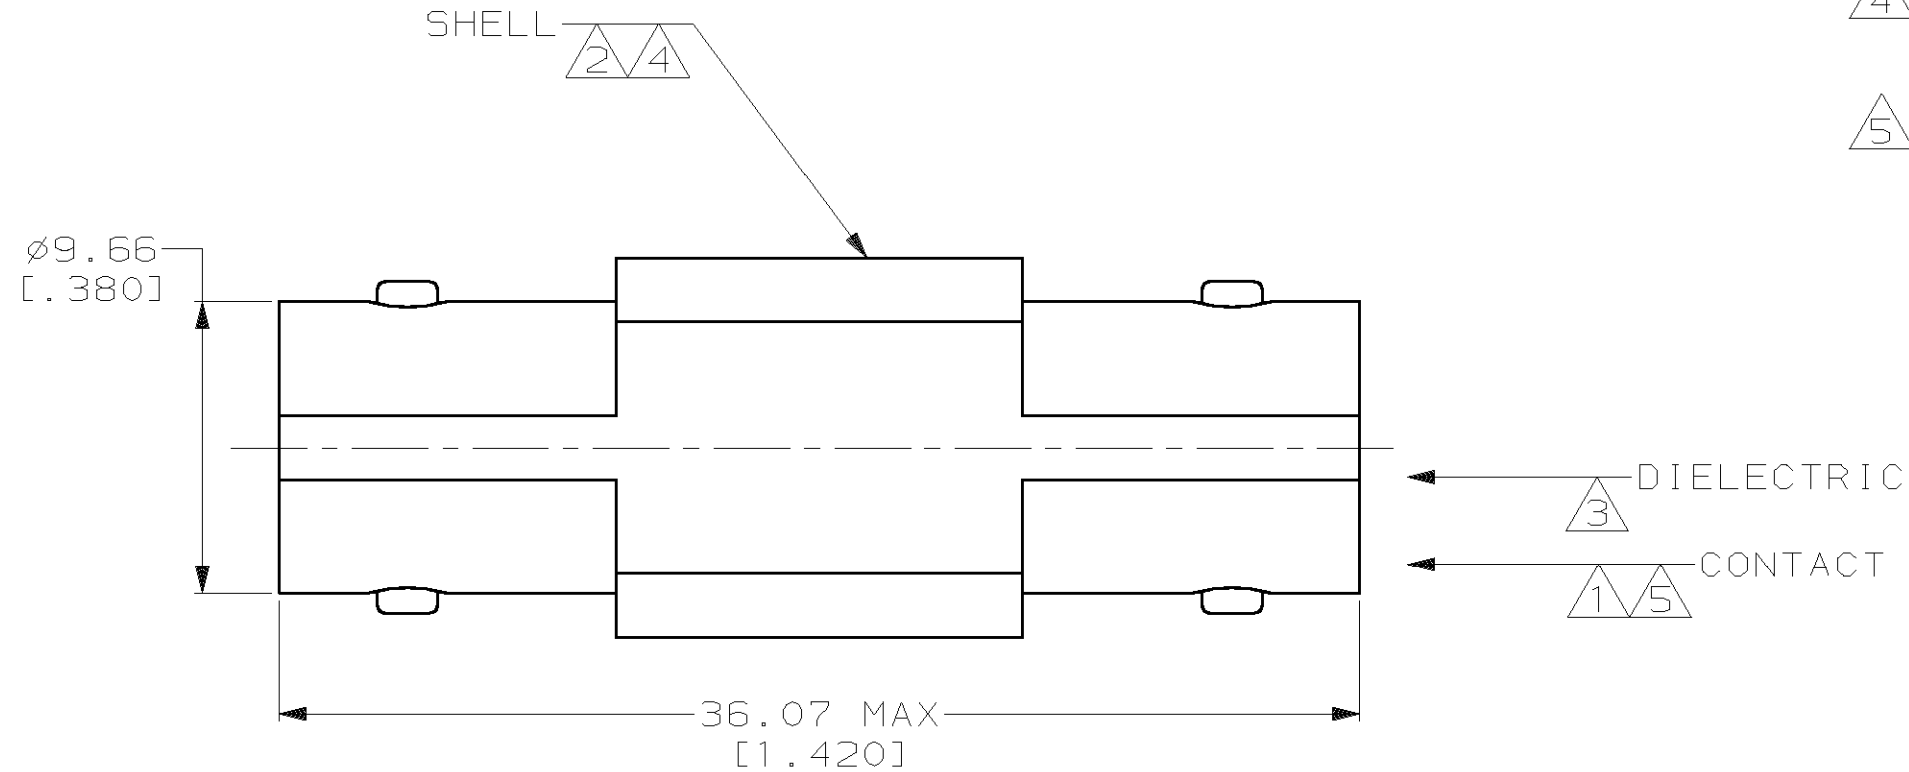

OBSOLETE	414414-2
	414414-1
PART NUMBER	

THIS DRAWING IS A CONTROLLED DOCUMENT FOR AMP INCORPORATED. IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.

DO NOT SCALE PRINT. UNLESS SPECIFIED DIMENSIONS IN mm [INCHES] TOLERANCES ON: 2 PLC DEC ± 0.05 [∅.002] 3 PLC DEC ± - ANGLES ± -		DR 9-8-92 M.E. COWHER	AMP Incorporated Harrisburg, PA 17105-3608	
MATERIAL ①②③		CHK 9-14-92 M. PHILLIPS		
FINISH ④⑤		APPD 9-14-92 M. PHILLIPS	NAME JACK ADAPTER ASSEMBLY, COML BNC	
		APPD 9-14-92 M.E. COWHER	SIZE B	CAGE CODE 00779
		PRODUCT SPEC -	DRAWING NO C-414414	
		APPLICATION SPEC -	SCALE 4:1	SHEET 1 OF 1
		WEIGHT -	PART NO	