

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

MAR ,2006.

© COPYRIGHT 2006 BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC

	DIST
--	------

REVISIONS

[illegible]

LTR

DESCRIPTION

DATE _____

	DWN
--	-----

	APVD
--	------

B





ECR-07-003675

15FEB07

JMS

S	FWK
---	-----

NOTES

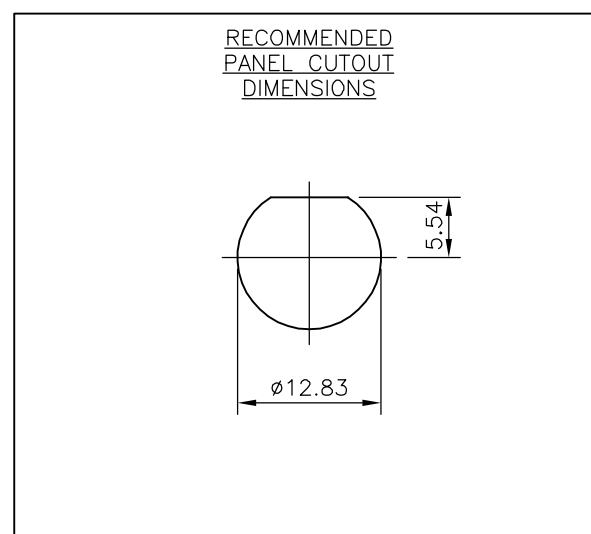
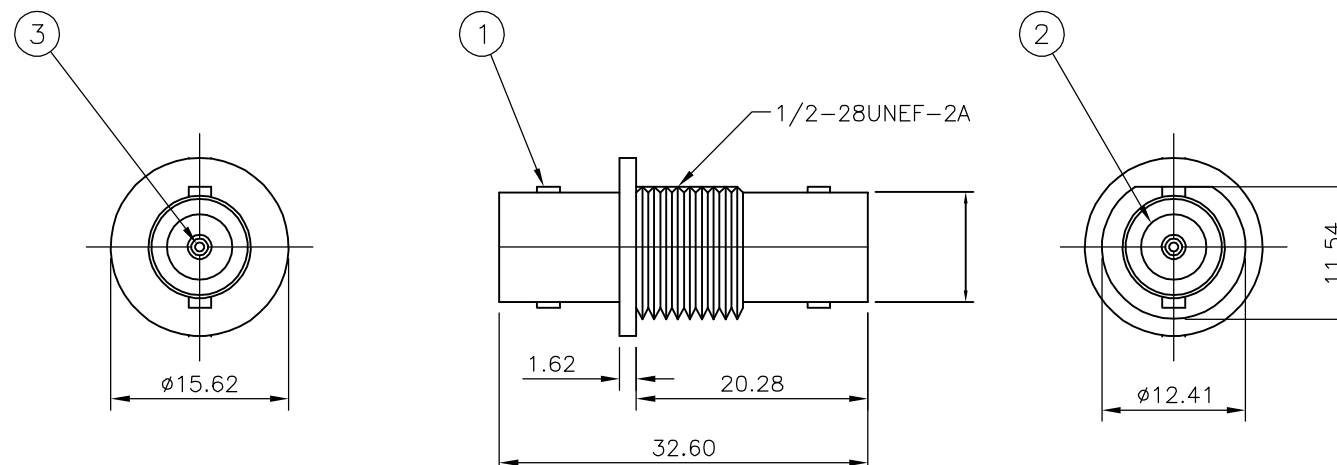
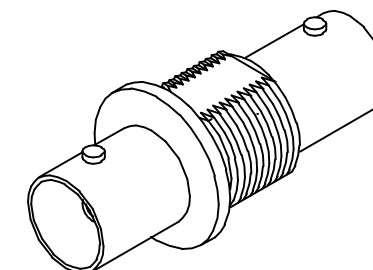
- | | |
|---|--|
|  | 100 TRAY PACK IN ACCORDANCE WITH AMP SPEC 107-3275 |
|  | SINGLE PACK IN ACCORDANCE WITH AMP SPEC 107-3275 |
|  | GOLD PLATING |
|  | NICKEL PLATING |





5. RECOMMENDED MOUNT NUT 1-1634816-0
6. RECOMMENDED LOCKWASHER 1-1634817-0

7. CHARACTERISTICS
- | | |
|-------------------------------|----------------|
| FREQUENCY RANGE: | DC-4GHz |
| INSULATION RESISTANCE: | 5000 MOHMS |
| WORKING VOLTAGE: | 500V |
| DIELECTRIC WITHSTAND VOLTAGE: | 1500V RMS |
| TEMPERATURE RATE: | -55°C TO +85°C |
| CONTACT RESISTANCE: | 3 mOHMS |

8. MECHANICAL CHARACTERISTICS
DURABILITY: 50 CYCLES

9. FOR TECHNICAL DATA REFER TO YOUR LOCAL TYCO ELECTRONICS SALES OFFICE
10. ALL DIMENSIONS ARE NOMINAL FOR REFERENCE ONLY UNLESS OTHERWISE STATED



						1	1	PHOS BRONZE 	CONTACT	3
						1	1	POLYMETHYLPENTENE	INSULATOR	2
						1	1	ZINC ALLOY 	BODY	1
						5--1	5--0	MATERIAL	DESCRIPTION	ITEM
										
QUANTITY PER ASSY								PARTS LIST		

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN	20MAR06
-----	---------

CHK	20MAR06
-----	---------

S. FARLOW
APVD 20 MAR 06

F.WHEELER-KING
PRODUCT SPEC

APPLICATION SPEC

 Lund University

Bideford, UK EX39 4JF

NAME _____

BNC BULKHEAD ADAPTOR JACK – JACK

[illegible]