


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION AUGUST, 2006.

© COPYRIGHT 2006 BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.


LOC	DIST	REVISIONS					
E	B	P	LTR	DESCRIPTION	DATE	DWN	APVD
		C		ECR-06-018891	25AUG06	JMS	FWK

NOTES

- 1 SINGLE PACK IN ACCORDANCE WITH AMP SPEC 107-3275
- 2 50 TRAY PACK IN ACCORDANCE WITH AMP SPEC 107-3275
- 3 Au PLATING
- 4 Ni PLATING
- 5 HAND TOOL: 9-1478240-0
- 6 DIE SET: 9-1478248-0
- 7 ELECTRICAL CHARACTERISTICS
 FREQUENCY RANGE: DC - 2 GHz
 NOMINAL IMPEDANCE: 50 Ohm
 INSULATION RESISTANCE: 5000 MOhm
 WORKING VOLTAGE: 100 Volts RMS at Sea Level
 DIELECTRIC WITHSTAND VOLTAGE: 1000 Volts RMS Max
 CONTACT RESISTANCE:
 CENTRE CONTACT: 10.00 mOhm Max
 OUTER CONTACT: 5.00 mOhm Max
 VSWR @ 1.8GHz: 1.30:1 Max
 INSERTION LOSS dB @ x 1.8 GHz: 0.20 Max
- 8 MECHANICAL CHARACTERISTICS
 CABLE RETENTION FORCE:
 RG58C/U, 141A/U, URM43, 76 170N Min
 RG174A/U, 188A/U, 316/U, URM95 85N Min
 DURABILITY: 500 Cycles Min
- 9 ENVIRONMENTAL CHARACTERISTICS
 OPERATING TEMPERATURE: -55 to +85 DegC
- 10 FOR TECHNICAL DATA REFER TO YOUR LOCAL TYCO ELECTRONICS SALES OFFICE
- 11 ALL DIMENSIONS ARE NOMINAL FOR REFERENCE ONLY UNLESS OTHERWISE STATED

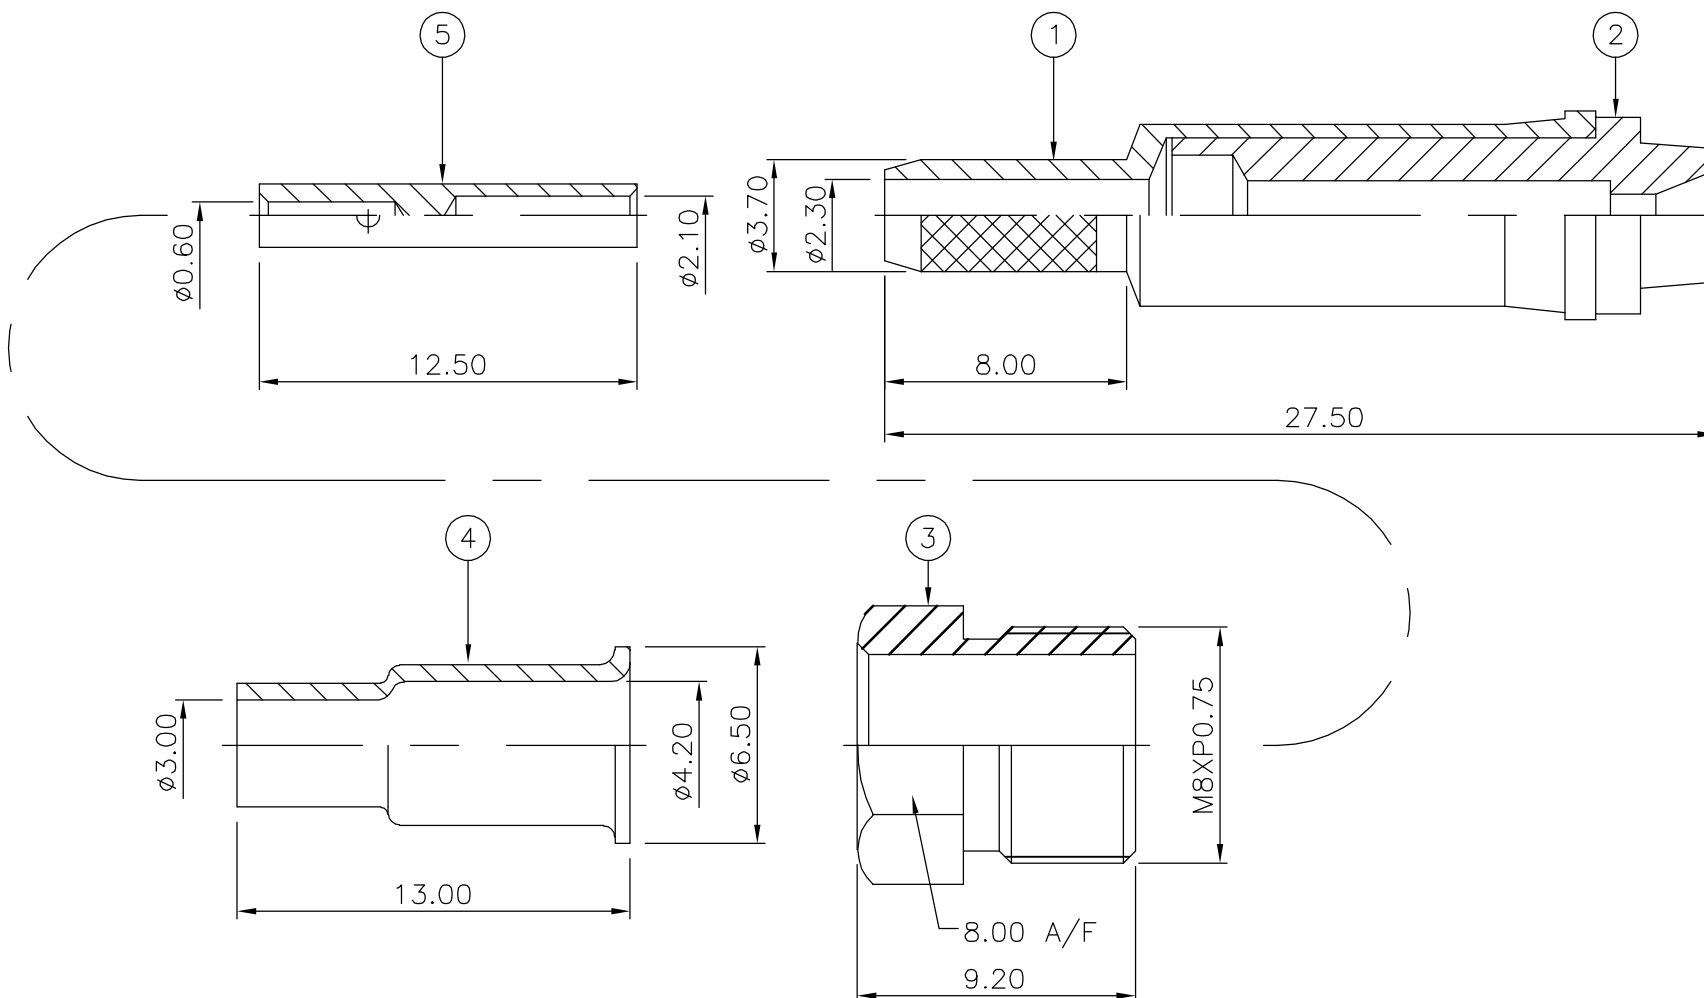

QTY	UNIT	MATERIAL	DESCRIPTION	ITEM
1	1	BRASS	CONTACT	5
1	1	BRASS	FERRULE	4
1	1	BRASS	NUT	3
1	1	DELTRIN	INSULATION	2
1	1	BRASS	BODY	1
6--0	1--0	MATERIAL	DESCRIPTION	ITEM

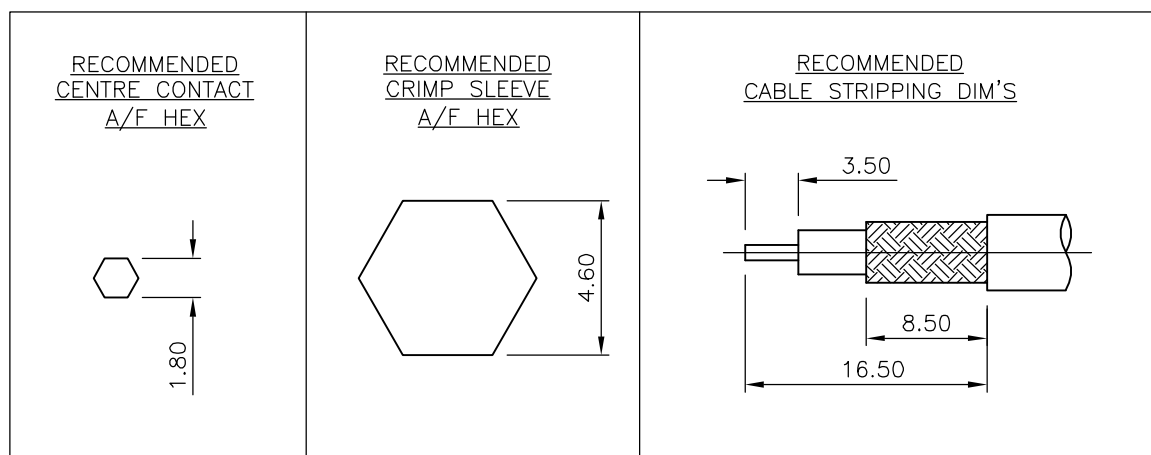

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN	J.SANDWELL	25AUG06	 Tyco Electronics Corporation Bideford, UK, EX39 4HE
CHK	S.PARLOW	25AUG06	
APVD	F.WHEELER-KING	25AUG06	
PRODUCT SPEC	NAME		
APPLICATION SPEC			FME STRAIGHT JACK CRIMP 50 OHM RG174A/U, 188A/U, 316/U, URM95, KX3B, KX22A
WEIGHT			SIZE
SEE TABLE			A3
SEE TABLE			CAGE CODE
SEE TABLE			00779
MATERIAL			DRAWING NO
SEE TABLE			C-1337551
CUSTOMER DRAWING			RESTRICTED TO
SCALE			NTS
SHEET			1 OF 1
REV			C