

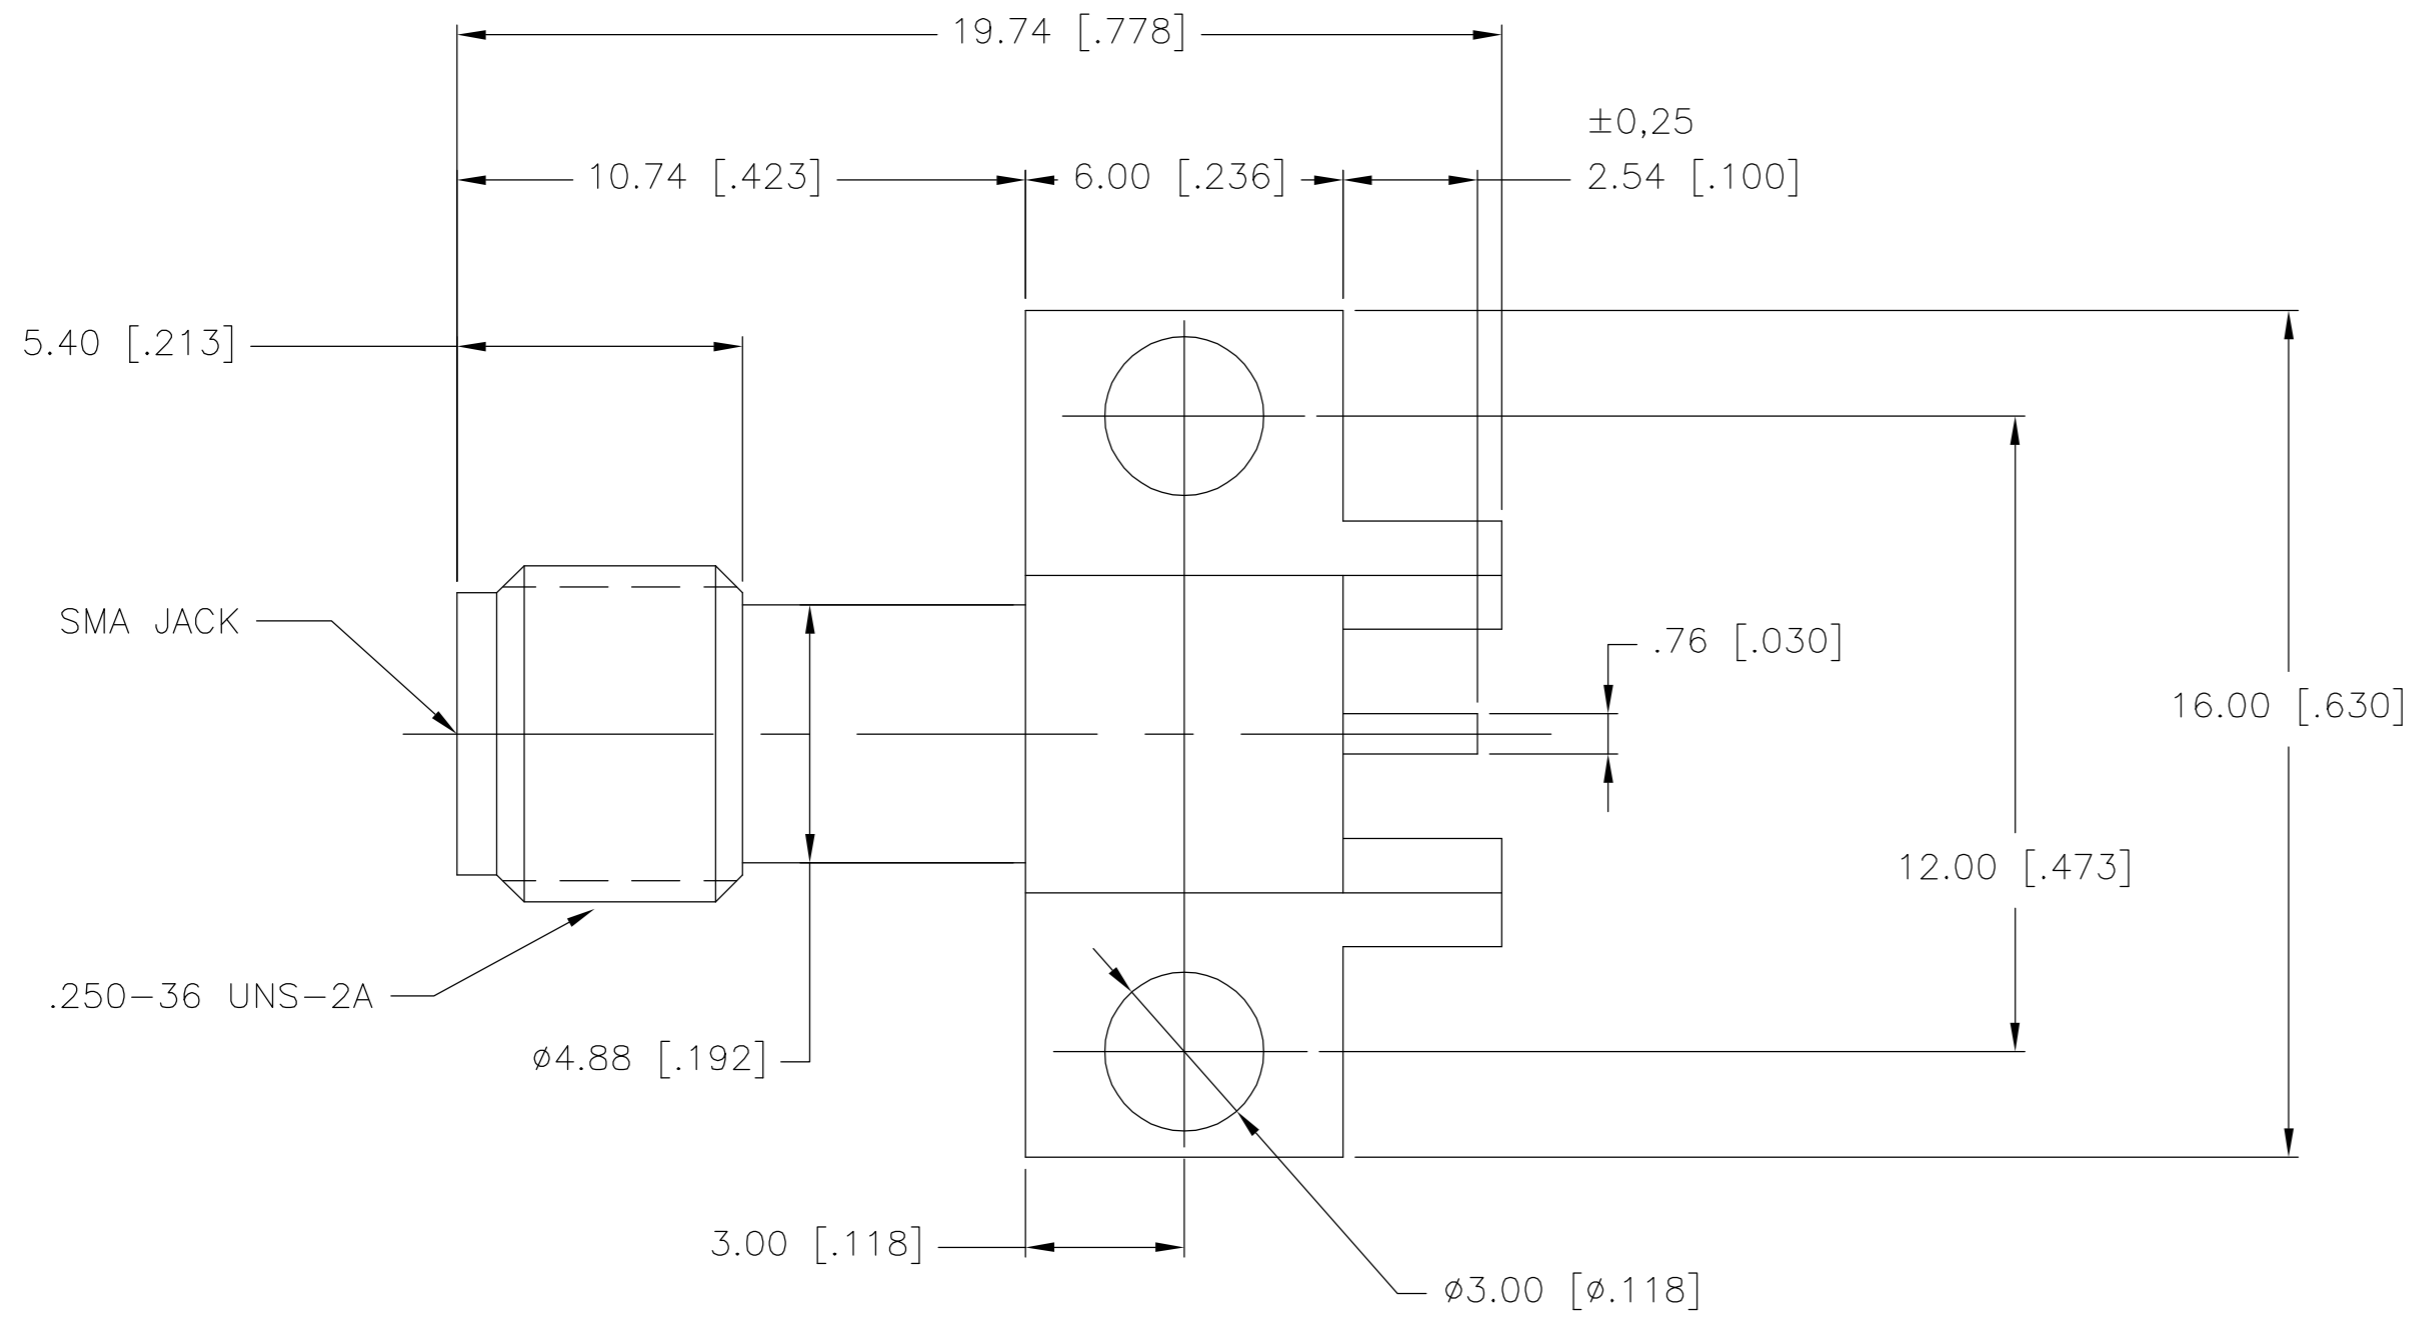


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

Loc		DIST		REVISIONS			
P	LTR	DESCRIPTION		DATE	DWN	APVD	
0		RELEASE PER EC OS14-0129-05		3/28/05	DC	DC	

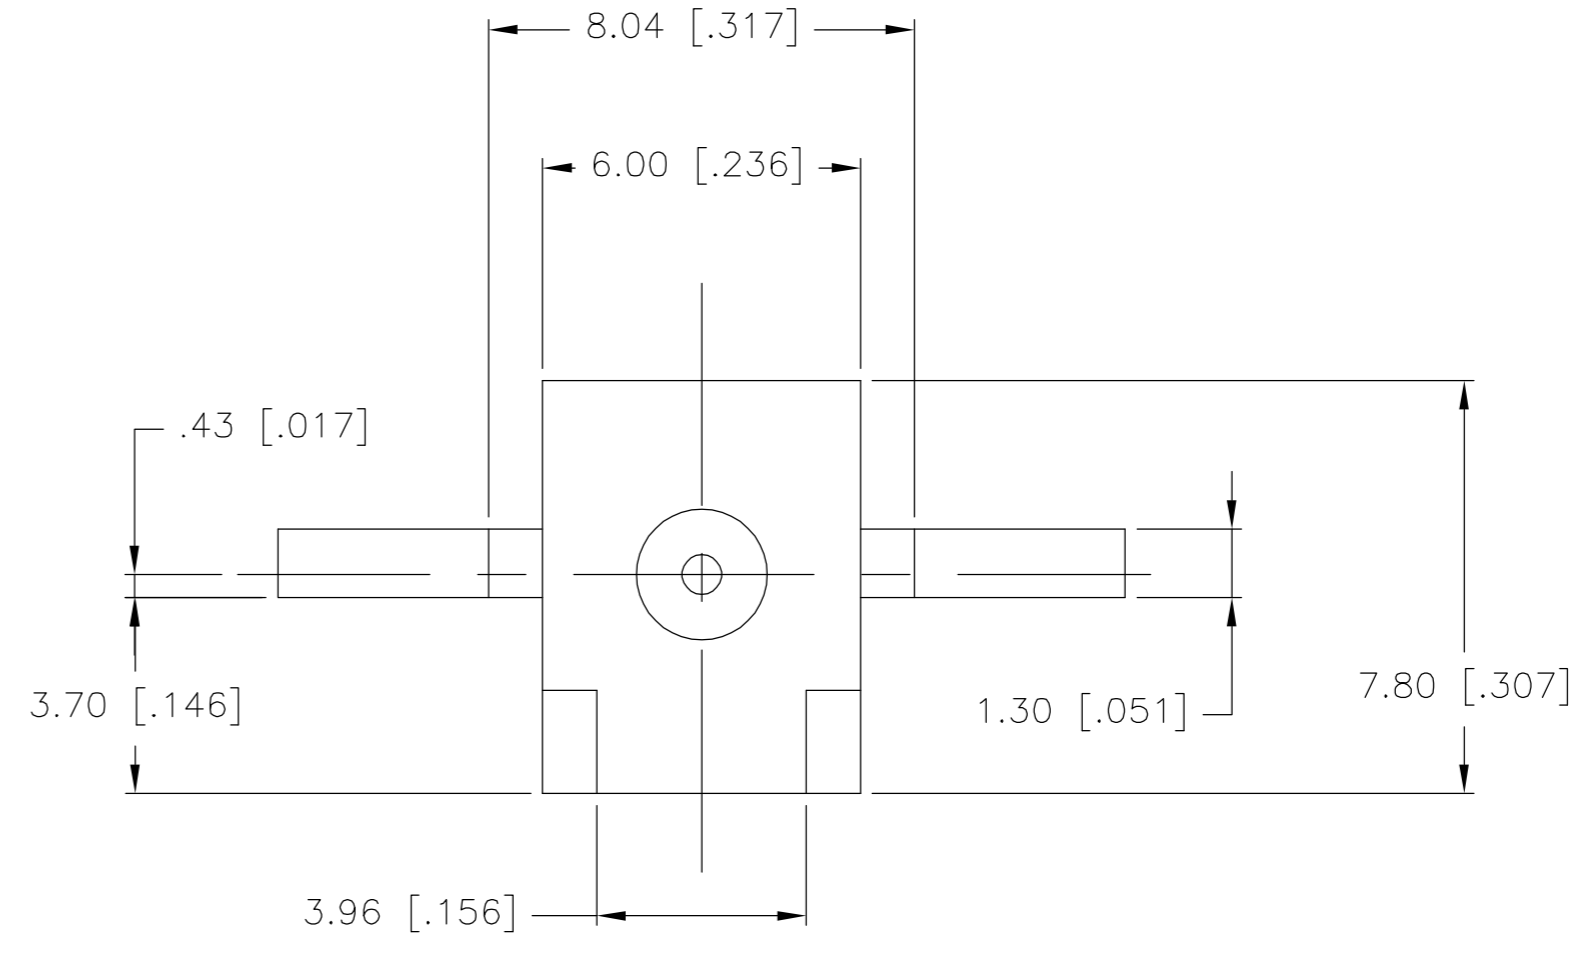

- NOTES:
- 1) IMPEDANCE: 50 OHMS
 - 2) FREQUENCY: 0-6 GHz
 - 3) VSWR: 1.35 MAX
 - 4) INSERTION LOSS: 0.07 f(GHz) dB MAX
 - 5) VOLTAGE RATING: 500 VEFF MAX
 - 6) DIELECTRIC WITHSTANDING VOLTAGE: 1000 VEFF MIN
 - 7) INSULATION RESISTANCE: 5000 MOhms MIN
 - 8) CENTER CONTACT CAPTIVATION:
 AXIAL: 27 N MIN (BOTH DIRECTIONS)
 TORQUE: 2.8 N-cm

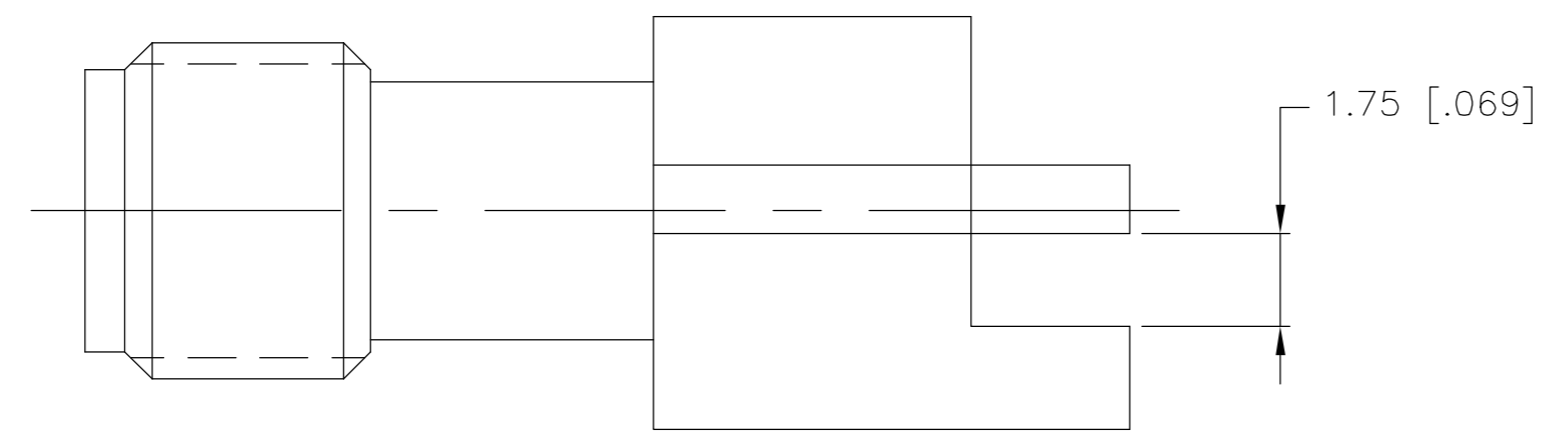

1408492-1
 PART NO

HOUSING	STAINLESS STEEL	PASSIVATE
CONTACT	BERYLLIUM COPPER	GOLD
DIELECTRIC	PTFE	N/A
COMPONENT	MATERIAL	FINISH

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	31MAR2003	 Tyco Electronics Corporation Norwood, MA 02062
DIMENSIONS: MM		CHK	12/16/04	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD	12/16/04	
0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± 0,13 4 PLC ± - ANGLES ± 1		PRODUCT SPEC		
MATERIAL	FINISH	WEIGHT	-	NAME SMA EDGE MOUNT JACK RECEPTACLE - STRAIGHT TERMINAL
		CUSTOMER DRAWING	SCALE 10:1	SIZE A2 CAGE CODE 00779 DRAWING NO C=1408492 RESTRICTED TO -
			SHEET 1 OF 1	REV 0

1408492