
# Pomona®

# Model 2455 Connector Type N (F) Panel Receptacle

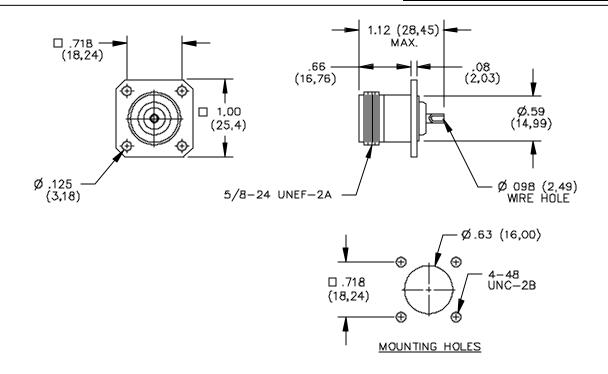

### **MATERIALS:**

Body: Gold Plated Brass Center Contact: Gold Plated Beryllium Copper Dielectric: PTFE

#### Finish:

Body: Tarnish Resistant Center Contact: Gold Plated

### **RATINGS:**

Operating Temperature: -65°C (-85°F) to +165°C (+329°F) Operating Voltage: 1000 VRMS Nominal Impedance: 50 Ohms

## **ORDERING INFORMATION:** Model 2455

All dimensions are in inches. Tolerances (except noted):  $.xx = \pm.02^{\circ}$  (,51 mm),  $.xxx = \pm.005^{\circ}$  (,127 mm). All specifications are to the latest revisions. Specifications are subject to change without notice. Registered trademarks are the property of their respective companies. Made in USA

6/9/99	Sales: 800-490-2361 Fax: 888-403-3360
SY/EH/LS	Technical Assistance: 800-241-2060
S:\Engineering\Release\DataSheets\FlukeDataSheet\d2455 1 01.doc	