


ISS	SYMBOL	DESCRIPTION\DATE

REVISIONS



29.2

REMARK: RoHS REQUIREMENT APPLIED
(符合 RoHS)

STAKE IN 2 PLACES
EQUALLY SPACED 180°
APART
(打二點, 間隔 180°)

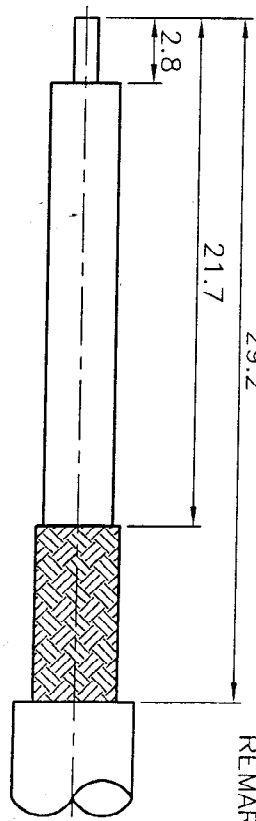


RECOMMENDED
CABLE STRIPPING DIM'S
(建議剝線尺寸)

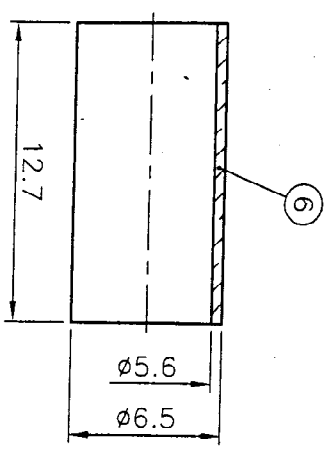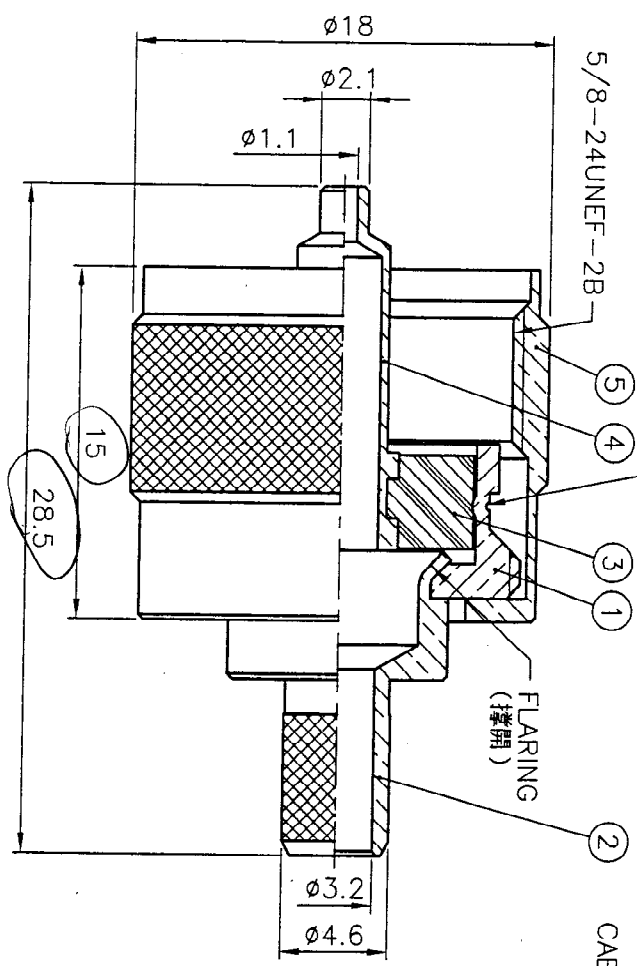

NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)
1. BRASS PER QQ-B-626
2. NICKEL PL 70 MIN THICK OVER COPPER STRIKE
3. BRASS JIS H 3250, C 2700

1. CRIMPED FERRULE
HEX CRIMP SIZE .213"
(套管壓著工具)
2. CRIMPED CONTACT PIN
HEX CRIMP SIZE .068"
(中心針壓著工具)



NO.	DESCRIPTION	MATERIAL	FINISH	QTY	DRAWING NO.	SCALE	3/1	ISSUE	A1
6	FERRULE	NOTE 3	NOTE 2	1	C06-001N	DIMENSIONS ARE IN MILLIMETERS UNLESS OTHERWISE SPECIFIED TOLERANCES (一般公差) 0.5~6 = ±0.2 >6~30 = ±0.4 >30~120 = ±0.6 >120~315 = ±1 >315~1000 = ±1.6 ANGLES(角度) = ±5°			
5	SHELL	NOTE 1	NOTE 2						
4	CONTACT PIN	NOTE 1	NOTE 2						
3	INSULATOR	DELRIN	WHITE	1	H7501-BNDNA				
2	BRAID HOLDER	NOTE 1	NOTE 2						
1	BODY	NOTE 1	NOTE 2						

PART NO.		25-7307
APPROVED	DATE	02/07/06
CHECKED	DATE	02/07/06
DRAWN	DATE	02/07/06

3 帛江科技股份有限公司
BO-JIANG TECHNOLOGY CO., LTD.
UHF CRIMP PLUG
(FOR RG-58C/U, 58/U)
DRAWING NO. R7501-BNDNA
FILE NO. Z:\銀線\B75\B7501BNDNA-A1R