
Pomona®

Model 4159 BNC Bulkhead Receptacle, Female, Hermetically Sealed

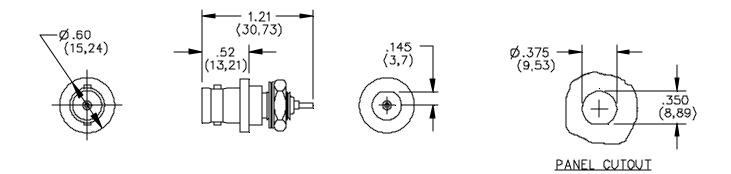

MATERIALS:

Body – Brass, Tarnish Resistant Plating, Center Contact – Gold Plated Beryllium Copper Finish: Body, Lockwasher and Hex Nut – Tarnish Resistant Center Contact – Gold Plated Dielectric – PTFE

Marking: "Pomona 4159"

RATINGS:

Nominal Impedance: 50 Ohms Leakage Rate: Less than 10^{-7} cc/sec of tracer gas at one atmosphere.

ORDERING INFORMATION: Model 4159

All dimensions are in inches. Tolerances (except noted): $.xx = \pm .02$ " (,51 mm), $.xxx = \pm .005$ " (,127 mm). All specifications are to the latest revisions. Specifications are subject to change without notice. Registered trademarks are the property of their respective companies.

Made in USA

6/9/99
Sales: 800-490-2361 Fax: 888-403-3360

SY/EH/LS
Technical Assistance: 800-241-2060

StEngineering\Release\DataSheett\FlukeDataSheett\FlukeDataSheett\flukeDataSheett\FlukeDataSheett\flu

PomonaACCESS 90232 (800) 444-6785 or (425) 446-6010 More drawings available at www.pomonaelectronics.com Page 1 of 1