
# Pomona®

## Model 2451 BNC Female Panel Receptacle

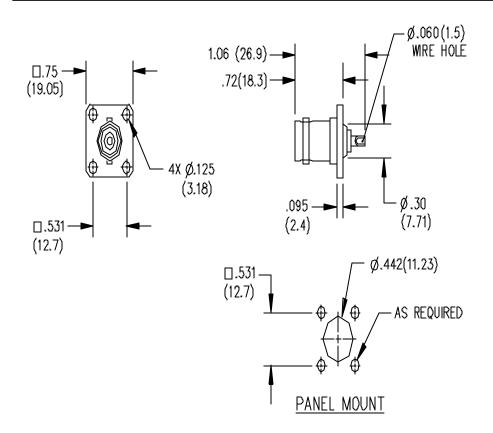

#### **MATERIALS:**

Body and Fittings: Brass, Tarnish Resistant Plating Center Contact: Gold Plated Beryllium Copper Dielectric: PTFE Finish: Body and Fittings: Tarnish Resistant Center Contact: Gold Plated

#### **RATING:**

Nominal Impedance: 50 Ohms Operating Temperature: -65°C to +165°C

### **ORDERING INFORMATION:** Model 2451

All dimensions are in inches. Tolerances (except noted):  $xx = \pm.02^{\circ}$  (,51 mm),  $xxx = \pm.005^{\circ}$  (,127 mm). All specifications are to the latest revisions. Specifications are subject to change without notice. Registered trademarks are the property of their respective companies. Made in USA

6/9/99	Sales: 909-469-2900	Fax: 909-629-3317
SY/EH/LS	Technical Assistan	ce: 800-241-2060
S:\Engineering\Release\DataSheets\FlukeDataSheet\d2451_1_01.doc		