

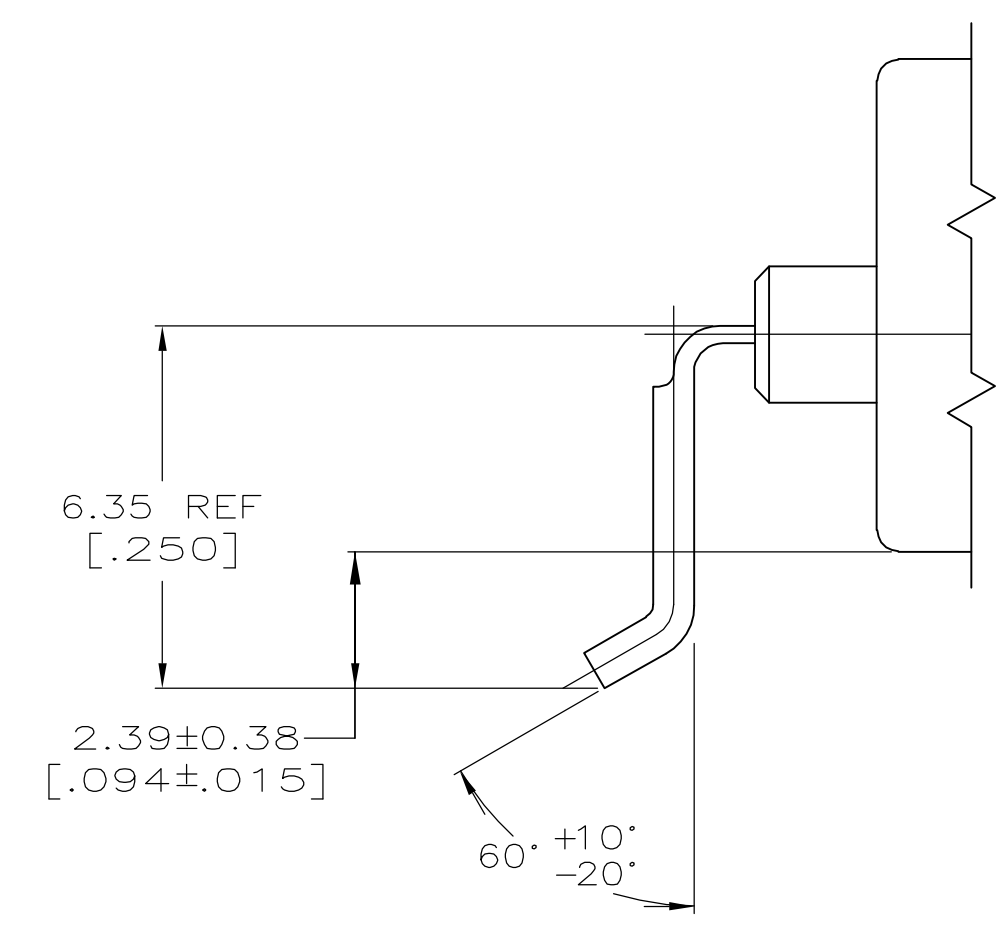


LOC	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD
AJ	16	J	REVISED PER EC 0514-0457-04	04NOV05	TS JL

- ① ZINC PER QQ-Z-363.
- ② POLYMETHYLPENTENE, GENERAL PURPOSE.
- ③ PHOSPHOR BRONZE PER QQ-B-750.
- ④ NICKEL PLATE PER QQ-N-290, 3.81  $\mu\text{m}$  [.000150] MINIMUM THICK.
- ⑤ GOLD PLATE PER MIL-G-45204, 0.76  $\mu\text{m}$  [.000030] MINIMUM THICK.
- ⑥ ZAMAK 8
- ⑦ TIN PLATE PER ASTM-B-545, 3.81  $\mu\text{m}$  [.000150] MINIMUM THICK.

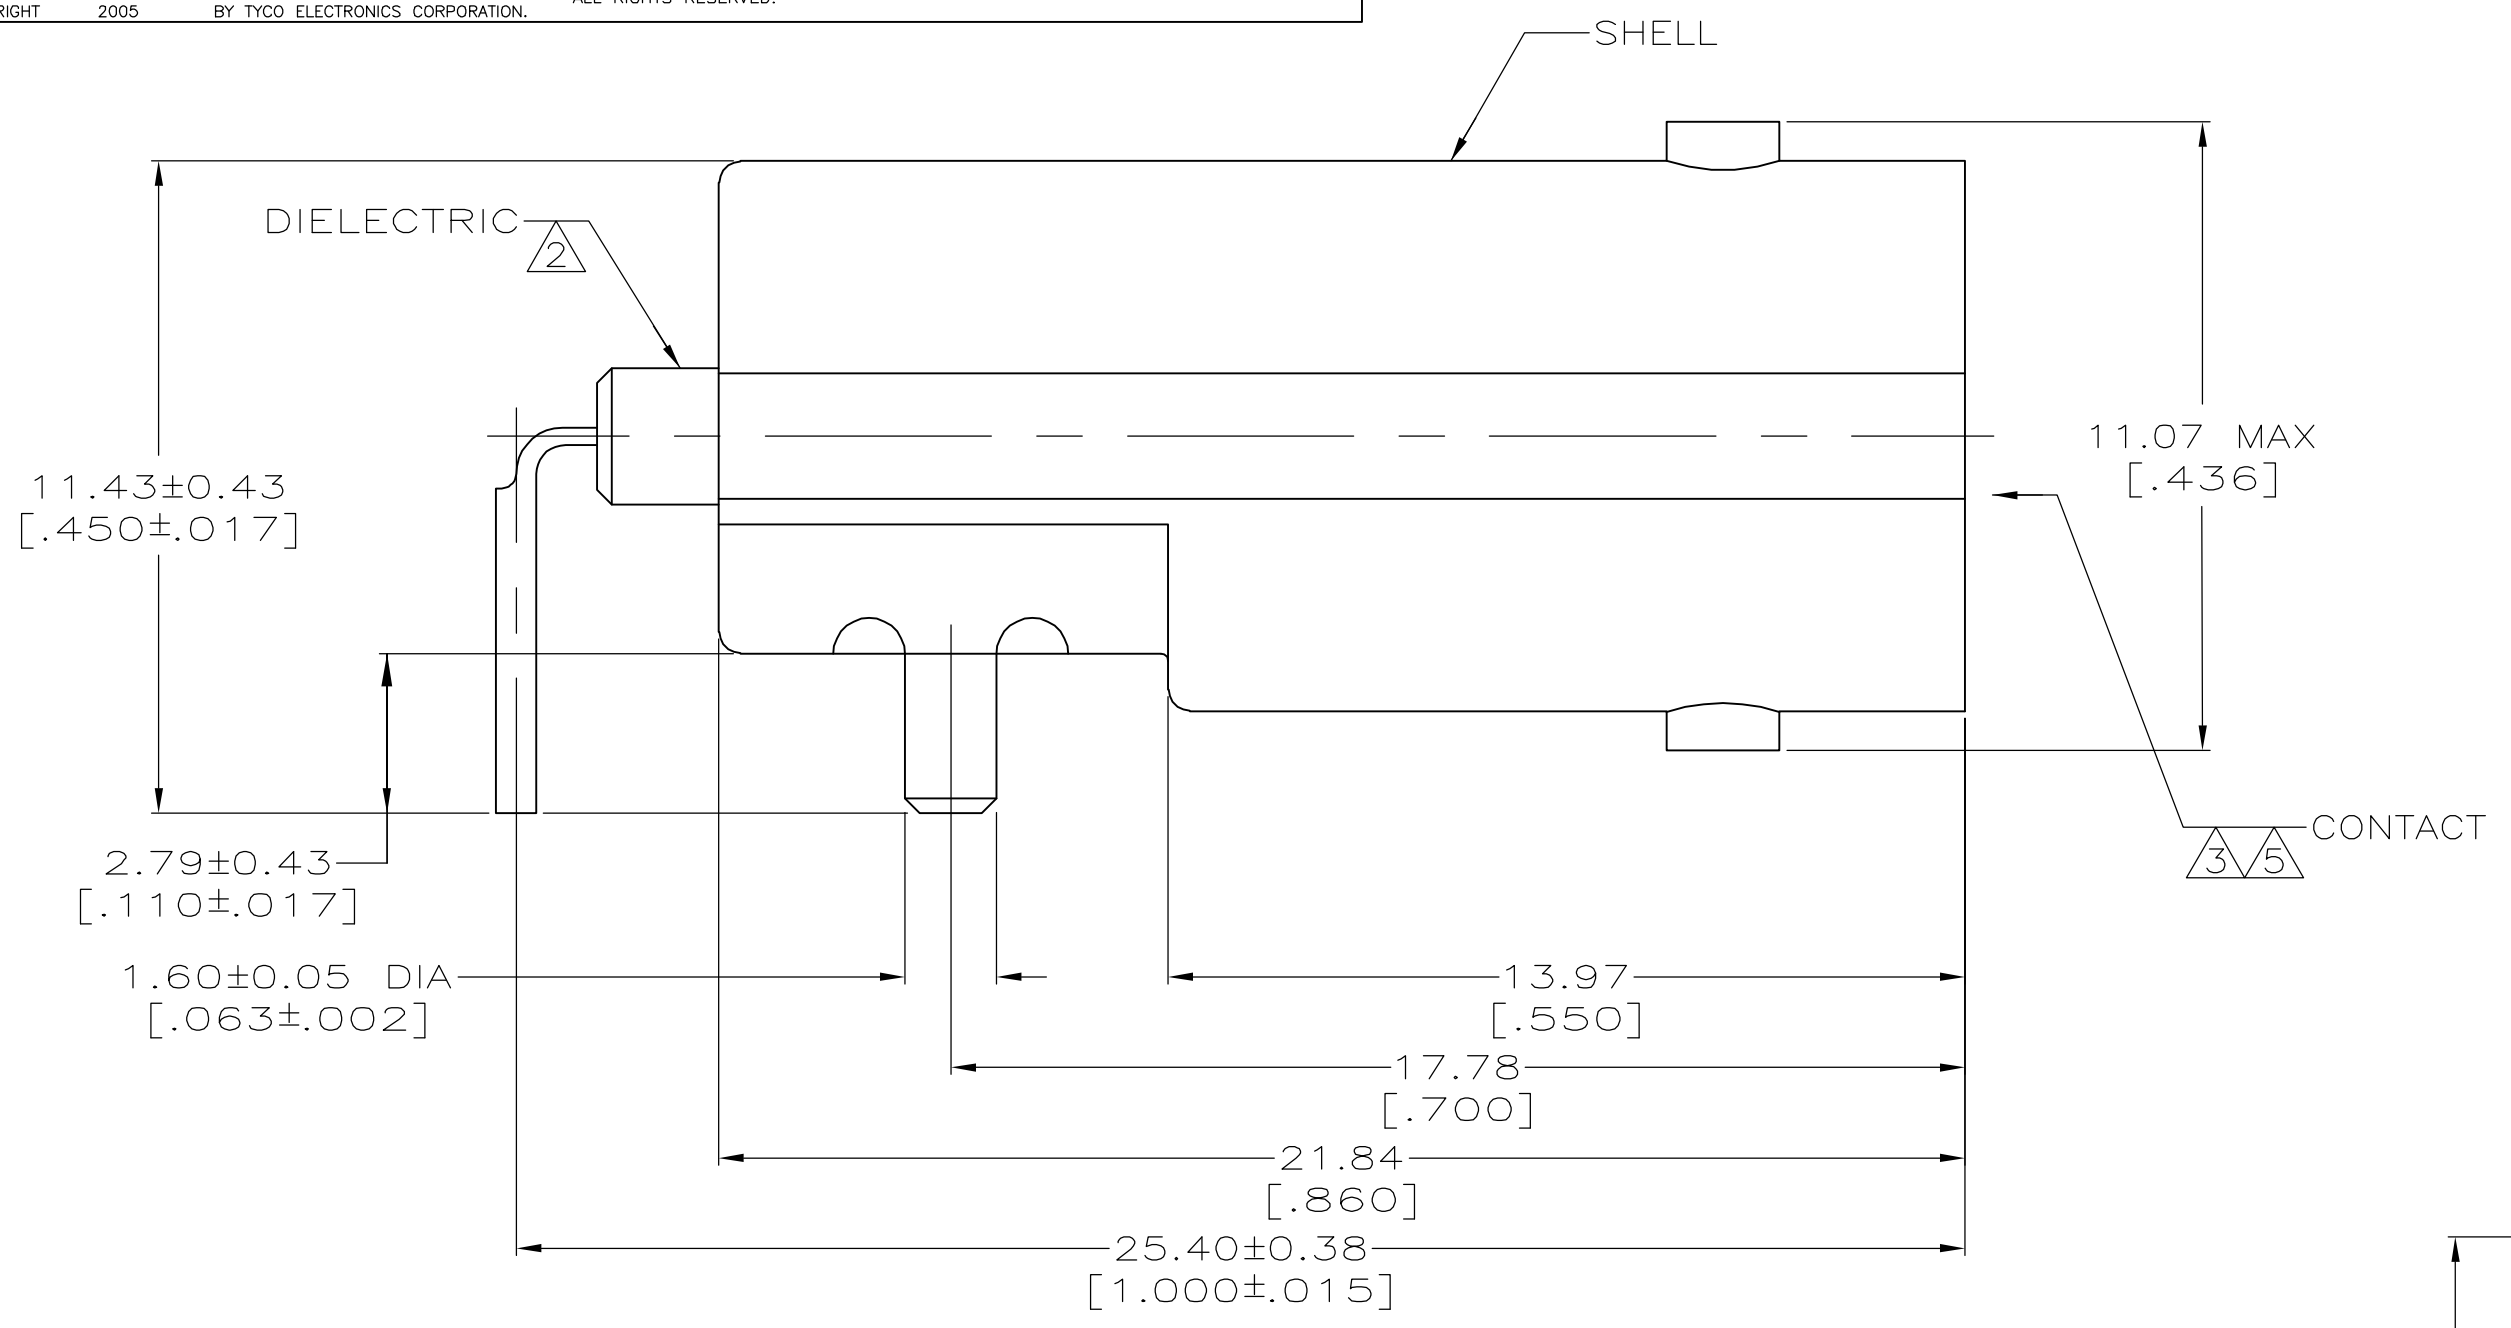

FOR 414373-3 AND 414373-4 ONLY

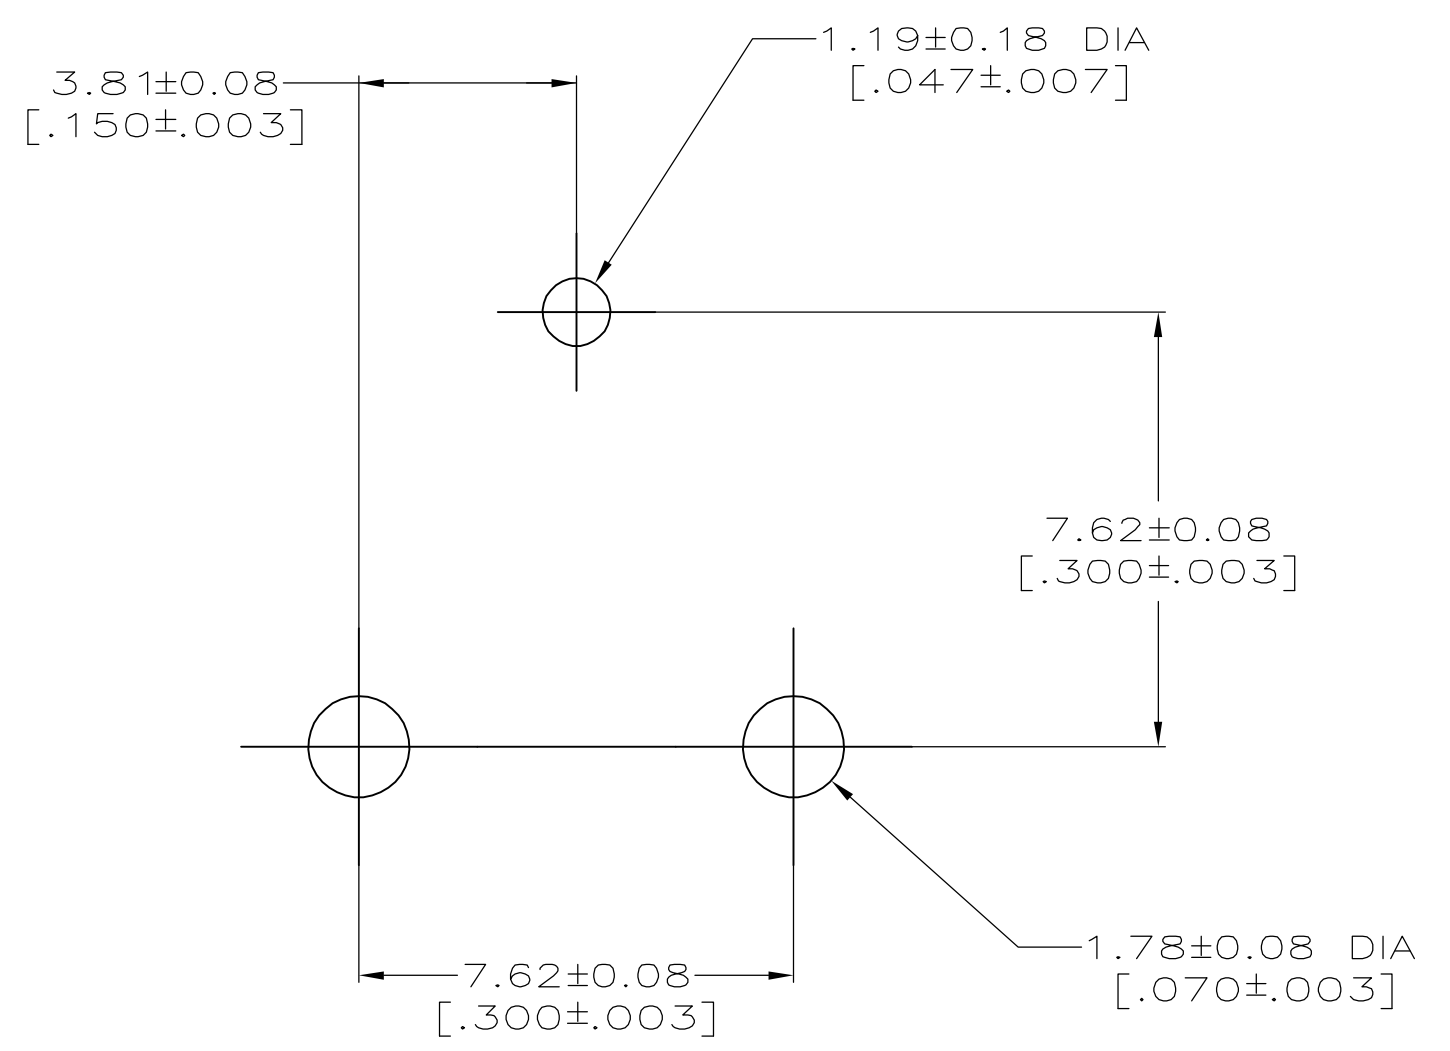

SUGGESTED PCB CONFIGURATION

OBSOLETE	⑦	①	414373-4
OBSOLETE	④	①	414373-3
	④	⑥	414373-2
	④	①	414373-1
	SHELL FINISH	SHELL MATERIAL	PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	05AUG92	Tyco Electronics Corporation Harrisburg, PA 17105-3608
DIMENSIONS: mm [INCHES]		J. LIPPERT	10AUG92	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		CHK	A. GABANY	NAME JACK, RIGHT ANGLE, PCB, 50 OHM, BNC
0 PLC ± -		APVD	A. GABANY	
1 PLC ± -		PRODUCT SPEC	108-12078	SIZE CAGE CODE DRAWING NO RESTRICTED TO
2 PLC ± ± 0.13 [.005]		APPLICATION SPEC	-	
3 PLC ± ± -		WEIGHT	-	A2 00779 C-414373
4 PLC ± ± -		CUSTOMER DRAWING	SCALE 8:1 SHEET 1 of 1 REV J	
ANGLES ± ± 5°				
MATERIAL SEE NOTES 1-3, 6		FINISH SEE NOTES 4 - 5		