
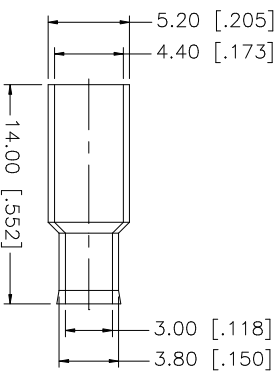


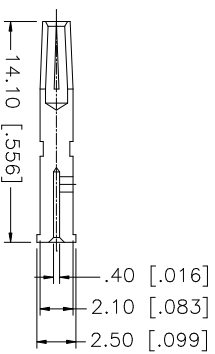
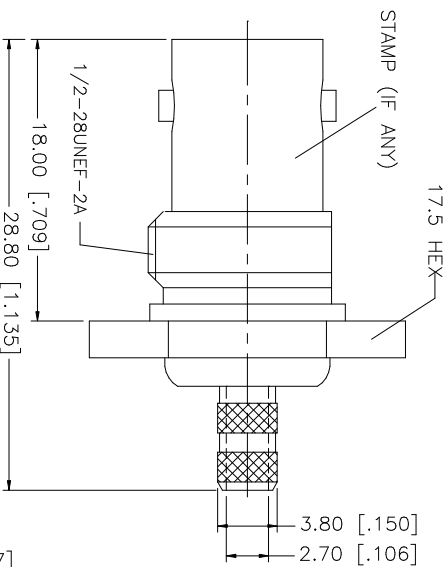
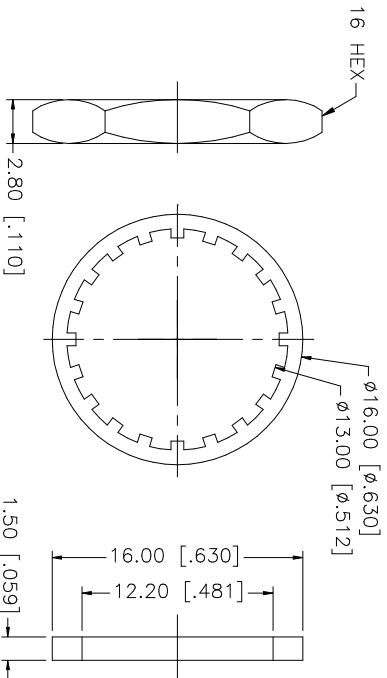


REV.	DATE	DESCRIPTION
A	08/27/98	REDIMENSION DRAWING
B	06/19/00	MODIFY BODY MATERIAL TO BRASS
C	04/04/03	INITIAL RELEASE

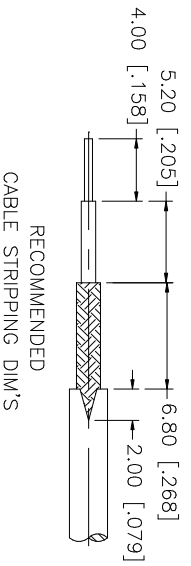

CRIMP NOTES:

1. CRIMPED FERRULE
HEX CRIMP SIZE .178"
2. CRIMPED CONTACT PIN
HEX CRIMP SIZE .068"

9	FERRULE	COPPER	NICKEL	1	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 - 8mm ± 0.20mm 8 - 30mm ± 0.40mm 30 - 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 - .315 = ± 0.007" .315 - 1.180 = ± 0.015" 1.180 - 4.724 = ± 0.020"	DO NOT SCALE DRAWING	CAD FILE C:/112/112235.DWG	DMG. NO. 112235.DWG	REV. C	SIZE A	SCALE NA
8	SLEEVE	DELFIN	NATURAL	1							
7	CONTACT PIN	PHOS. BRONZE	GOLD	1							
6	HEX NUT	BRASS	NICKEL	1							
5	LOCK WASHER	BRASS	NICKEL	1							
4	GASKET	RUBBER	NICKEL	1							
3	BARREL	BRASS	NICKEL	1							
2	INSULATOR	DELFIN	NATURAL	1							
1	HOUSING/BODY	BRASS	NICKEL	1							
	DESCRIPTION	MATERIAL	FINISH	QTY							

Amphenol **Comnex**

BNC BULKHEAD CRIMP JACK
(FOR RG-179/U, 187A/U CABLE)

112235