
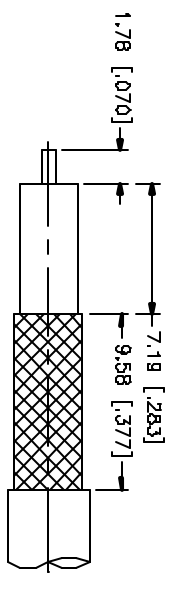
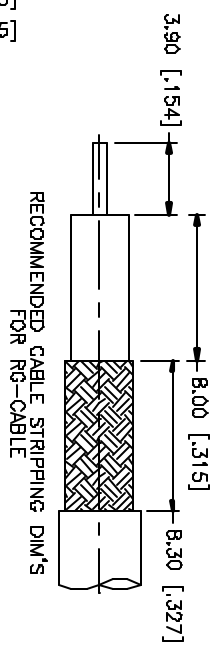



REV.	DATE	DESCRIPTION
NC	07/22/04	INITIAL RELEASE

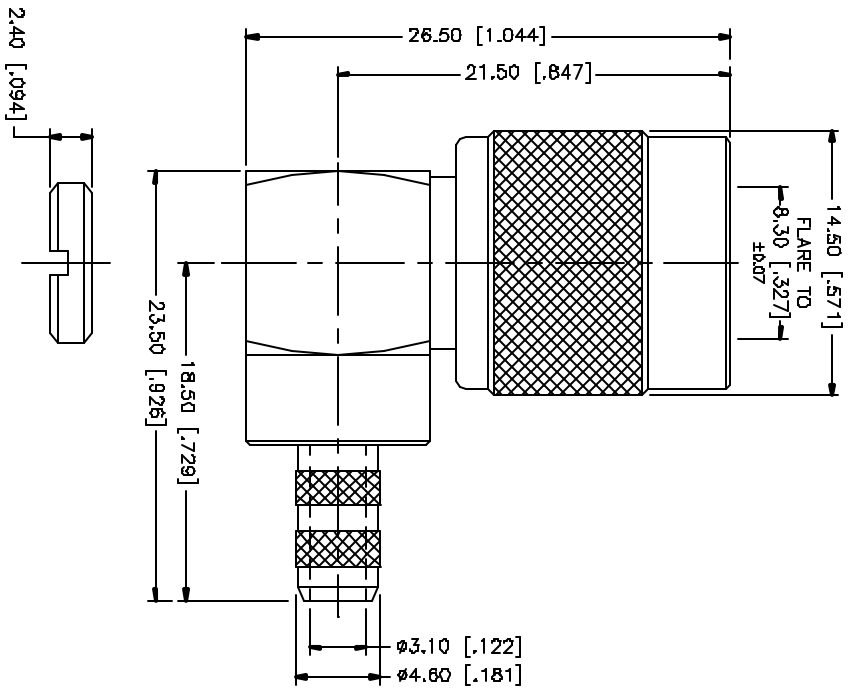

RECOMMENDED CABLE STRIPPING DIM'S
FOR 6 GHz PERFORMANCE CABLE WITH FOIL BRAID.

- NOTES:
1. CRIMPED FERRULE HEX SIZE .213"
 2. SOLDER CENTER CONTACT.

REV.	DATE	DESCRIPTION
8		
7		
6		
5		
4		
3		
2		
1		

DESCRIPTION	MATERIAL	FINISH	QTY
1	BRASS	NICKEL	1
2	TEFLON	NATURAL	1
3	PHOS. BRONZE	GOLD	1
4	COPPER	NICKEL	1
5	BRASS	NICKEL	1
6			
7			
8			

APPROVALS	DATE
DESIGN G.R.S.	07/22/04
CHECKED	
ASSEMBLED	
SHEET 1 OF 1	

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS FOR DIMENSIONS IN INCHES AND FOR DIMENSION TOLERANCES UNLESS OTHERWISE SPECIFIED
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS FOR DIMENSIONS IN INCHES AND FOR DIMENSION TOLERANCES UNLESS OTHERWISE SPECIFIED
TOLERANCES FOR DIMENSIONS ARE:
0.5 - 30mm ± 0.20mm
30 - 120mm ± 0.40mm
120 - 300mm ± 0.50mm
300 - 1200mm ± 0.75mm
1200 - 3000mm ± 1.00mm
3000 - 10000mm ± 1.50mm
10000mm and over ± 2.00mm
ANGLES: ± 0.25°
SPACINGS: ± 0.25mm
THREADS: UN/UNC ± 0.15mm
ROUNDED CORNERS: ± 0.25mm
DO NOT SCALE DRAWING

CAD FILE	DWG. NO.	REV.	NC	SIZE	SCALE
C:/122/122140RP.DWG	122140RP.DWG	NC		A	NA

Amphenol Connex

TNC REVERSE POLARITY R/A CRIMP PLUG
(FOR RG-58/U, 58C/U CABLE)

PART NO. 122140RP