REV.	DATE	DESCRIPTION
A	04/31/03	UPDATE DRAWING FORMAT

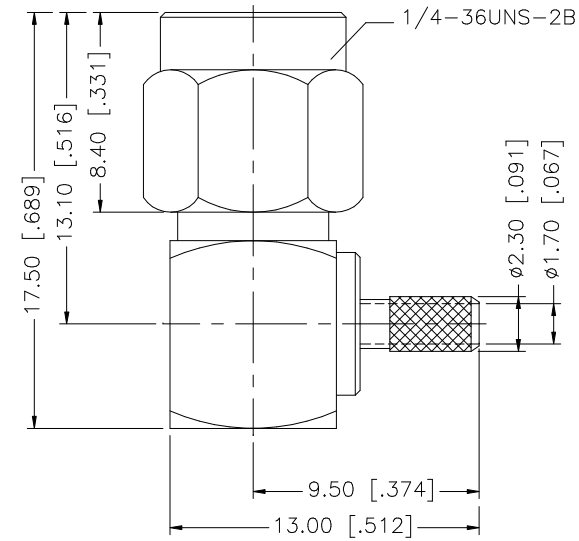



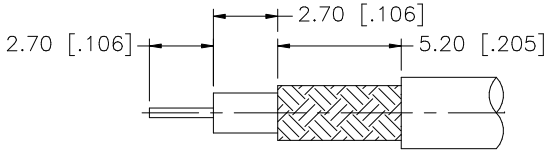

RECOMMENDED
CABLE STRIPPING DIM'S



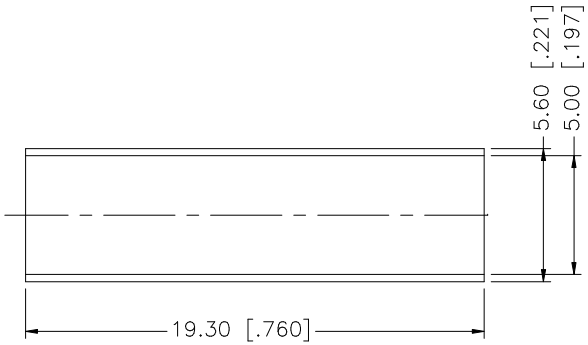

CRIMP NOTES:

1. CRIMPED FERRULE
   HEX CRIMP SIZE .128"

	DESCRIPTION	MATERIAL	FINISH	QTY
8				
7	HEAT SHRINK TUBE			1
6	FERRULE	COPPER	GOLD	1
5	GASKET	SILICONE	RED	1
4	CONTACT PIN	BRASS	GOLD	1
3	INSULATOR	TEFLON	NATURAL	1
2	HOUSING W/BARREL	BRASS	GOLD	1
1	SHELL	BRASS	GOLD	1

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [ ] ARE IN INCHES AND FOR CUSTOMER REFERANCE ONLY.

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE:

0.5 – 8mm ± 0.20mm
8 – 30mm ± 0.40mm
30 – 120mm ± 0.50mm

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE:

.020 – .315 = ± 0.007"
.315 – 1.180 = ± 0.015"
1.180 – 4.724 = ± 0.020"

DO NOT SCALE DRAWING

APPROVALS	DATE
DRAWN G.R.S.	04/31/03
CHECKED	
ISSUED	
SHEET 1 OF 1	

CAD FILE C:/132/132123.DWG

Amphenol Connex

PART DESCRIPTION
SMA R/A CRIMP PLUG
(FOR RG–174/U, 188A/U, 316/U CABLE)

PART NO. 132123

DWG. NO.	REV.	SIZE	SCALE
132123.DWG	NC	A	NA