

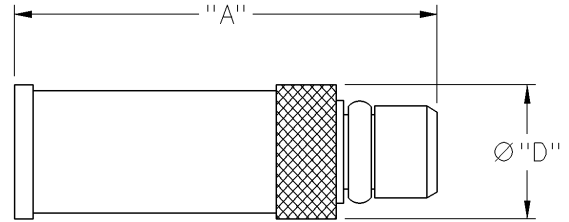
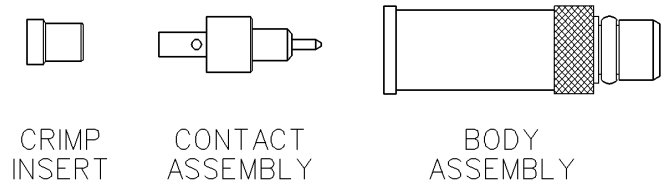
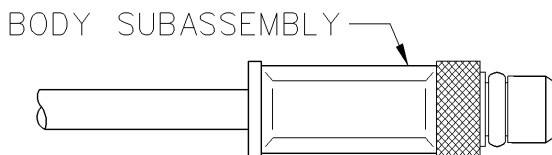
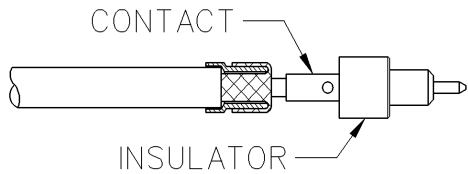


MMCX Straight Crimp Type Plug - Solder or Crimp Captivated Contact

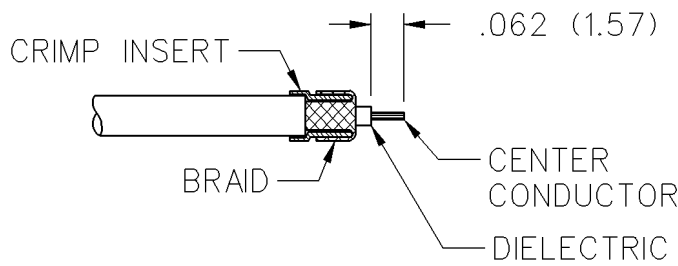

| CABLE TYPE | PART NUMBER | "A" | "D" | TERMINATION |
|--|--------------|--------------|-------------|--------------|
| .047" Diameter Flexible Huber K01152-07 Axon P512479A Astrolab 32018 DS | 135-3436-001 | .462 (11.73) | .137 (3.48) | Crimp Insert |

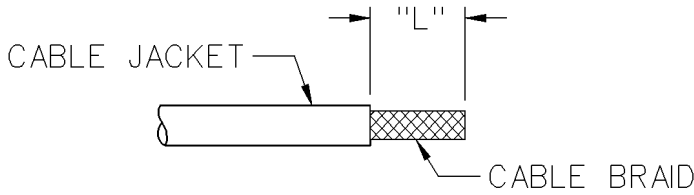

| CABLE GROUP | PART NUMBER | "L" | CRIMP HEX |
|---------------|--------------|-------------|-----------------------------|
| .047 Flexible | 135-3436-001 | .135 (3.43) | .105 (2.67) x .250 (2.67) W |

1. Identify piece parts. (3 piece parts)
2. Strip cable jacket to dimensions shown. Do not nick braid or center conductor during strip operations.
3. Slide crimp insert over braid and against jacket, fold braid around crimp insert as shown. Strip dielectric to dimension shown. Tin center conductor if contact is to be soldered attached. Do not tin center conductor if contact is to be crimp attached.
4. Assemble contact assembly onto cable as shown.
Solder attachment: Solder contact to center conductor. Care should be taken that excess solder is not applied.
Crimp attachment: Crimp contact to center conductor using Johnson Components™ hand tool 140-0000-952 and die set 140-0000-953. Crimp location should be centered between end of contact and cross-hole. Crimp attachment to solid center conductor cables is not recommended.
5. Slide body assembly over contact and crimp insert, then seat firmly as shown. Crimp body using recommended crimp die hex. Maintain forward pressure on cable while crimping.

MMCX - 50 Ohm Connectors



Specifications

ELECTRICAL RATINGS

Impedance: 50 ohms

Frequency Range: Connectors 0-6 GHz
 Dummy loads 0-1 GHz

VSWR: (f = GHz)

| | Straight Cabled Connectors | Right Angle Cabled Connectors |
|--------------------------|----------------------------|-------------------------------|
| .047 dia flexible | 1.20 | 1.14 + .07f |
| RG-178, RG-316, RG-316DS | 1.20 | 1.25 |
| .086 semi-rigid | 1.15 | 1.15 |

Uncabled receptacles, dummy loads N/A

Working Voltage: Connectors 170 Vrms at sea level†
 Dummy loads N/A

Dielectric Withstanding Voltage: Connectors...500 Vrms at sea level†
 Dummy loads N/A

Insulation Resistance: 1000 megohms min

Contact Resistance: (milliohms maximum)

| | Initial | After Environmental |
|--|---------|---------------------|
| Center contact (straight cabled connectors and uncabled receptacles) | 5.0 | 8.0 |
| Center contact (right angle cabled connectors) | 5.0 | 15.0 |
| Outer contact (all connectors) | 1.0 | 1.5 |
| Braid to body | 1.5 | N/A |

Corona Level: Connectors 190 volts min at 70,000 feet†
 Dummy loads N/A

Insertion Loss: (dB max tested at 1 GHz)

| | |
|-----------------------------------|-----|
| Straight cabled connectors | 0.1 |
| Right angle cabled connectors | 0.2 |
| Uncabled receptacles, dummy loads | N/A |

RF Leakage: (dB minimum, tested at 2.5 GHz)

| | |
|---------------------------|--------|
| Flexible cable connectors | -60 dB |
| .086 semi-rigid | -70 dB |
| Dummy loads | N/A |

RF High Potential Withstanding Voltage: (400 Vrms at 4 and 7 MHz)†

Power Rating (Dummy Load): - 0.5 watt @ +25°C, derated to 0.25 watt @ +125°C

MECHANICAL RATINGS

Engagement Design: Series MMCX

Engagement/Disengagement Force: 8 lbs. max axial engagement
 1.4 lbs. min axial disengagement

Contact Retention: 2.0 lbs. minimum axial force

Cable Retention:

| | Axial Force* (pounds) | Torque (in-oz) |
|--|-----------------------|----------------|
|--|-----------------------|----------------|

| | | |
|------------------------------|-----|-----|
| Connectors for .047 flexible | 3.5 | N/A |
|------------------------------|-----|-----|

| | | |
|-----------------------|-----|-----|
| Connectors for RG-178 | 7.0 | N/A |
|-----------------------|-----|-----|

| | | |
|-----------------------|------|-----|
| Connectors for RG-316 | 20.0 | N/A |
|-----------------------|------|-----|

| | | |
|-------------------------|------|-----|
| Connectors for RG-316DS | 25.0 | N/A |
|-------------------------|------|-----|

| | | |
|--------------------------------|------|----|
| Connectors for .086 semi-rigid | 30.0 | 16 |
|--------------------------------|------|----|

*Or cable breaking strength whichever is less.

Durability: 500 cycles minimum

ENVIRONMENTAL RATINGS (Meets or exceed the applicable paragraph of MIL-C-39012)

Operating Temperature: Connectors -65°C to +165°C
 Dummy loads -65°C to +125°C

Thermal Shock: Connectors: MIL-STD-202, Method 107, Condition C, except -55°C to +155°C (N/A dummy loads)

Corrosion: MIL-STD-202, Method 101, Condition B (N/A dummy loads)

Shock: MIL-STD-202, Method 213, Condition B (N/A dummy loads)

Vibration: MIL-STD-202, Method 204, Condition D (N/A dummy loads)

Moisture Resistance: MIL-STD-202, Method 106 (N/A dummy loads)

MATERIAL SPECIFICATIONS

Bodies: Brass per QQ-B-626, gold plated* per MIL-G-45204 .00001" min.

Contacts: Beryllium copper per QQ-C-530, gold plated* per MIL-G-45204 .00003" min.

Interface Spring: Beryllium copper per QQ-C-530, gold plated* per MIL-G-45204 .00003" min.

Insulators: PTFE fluorocarbon per ASTM D 1710 and ASTM D 1457

Crimp Sleeves: Copper per WW-T-799 or brass per QQ-B-626, gold plated per MIL-G-45204 .00001" min.

Mounting Hardware: Brass per QQ-B-626 or QQ-B-613, gold plated per MIL-G-45204 .00001" min.

*All gold plated parts include a .00005" min nickel barrier layer.

†Avoid user injury due to misapplication.

See safety advisory definitions inside front cover.

