


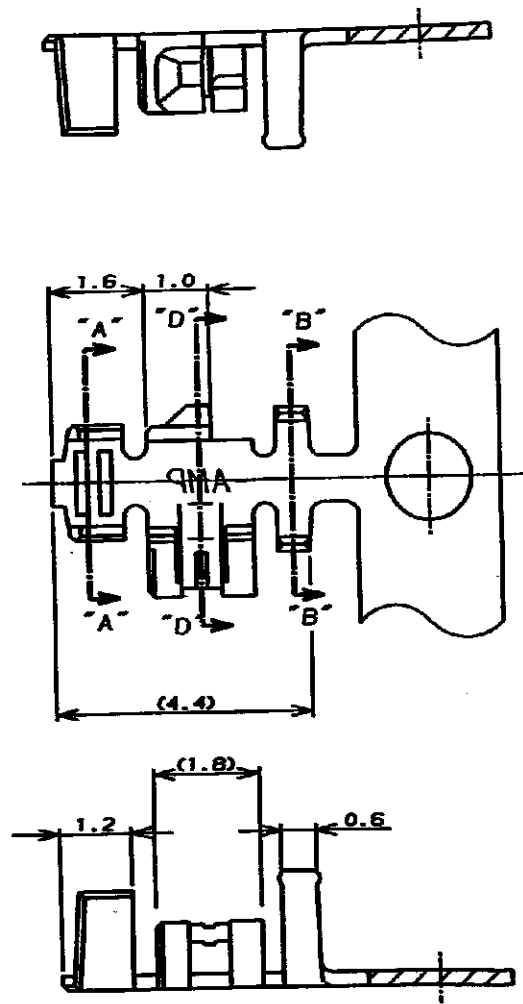
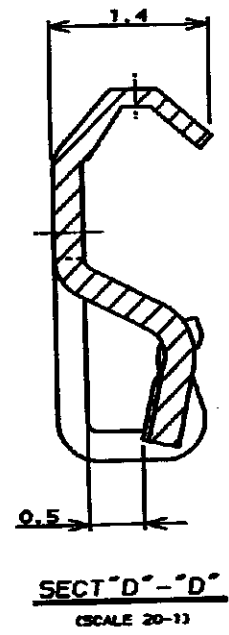


NUMBER C-175102  
 METRIC  
 3-D ANGLE PROJECTION

DIMENSIONS IN MILLIMETERS. DO NOT SCALE PRINT

PRINT DIST

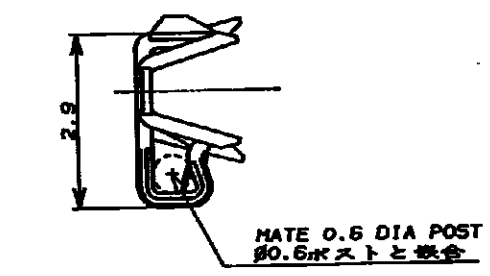

- 注:
1. 使用ハウジングは型番 175778
  2. 製品規格 : 108-5297
  3. 取付通用規格 : 114-S140

- NOTES:
1. USE HOUSING ; P/N 175778
  2. PRODUCT SPEC ; 108-5297
  3. APPLICATION SPEC ; 114-S140

Copyright © 1988 AMP (Japan), LTD. ALL RIGHTS RESERVED.		Copyright © 1988 AMP (Japan), LTD. ALL RIGHTS RESERVED.		<b>AMP</b> AMP (JAPAN), LTD. Tokyo, Japan	
NICKEL PLATED PHOSPHOR BRONZE (ONLY CONTACT AREA GOLD PLT. 0.2μ) 銅青銅にニッケル下地、接触部に金めっき0.2μ		1-175102-2		PART NO. 型番	
PRE TINNED PHOSPHOR BRONZE (0.25t) 錫めっき銅青銅 (厚0.25)		1-175102-1		PART NO. 型番	
L/P CONTACT L/P端子		MATERIAL & FINISH 材質		PART NO. 型番	
REVISION RECORD		WIRE RANGE 0.12 -0.35mm <sup>2</sup> (AWG26-22)		INSULATION DIA 1.0-1.5 mm	
H REVISED FJ00-0326-89 J.F.		MATERIAL SEE TABLE 表参照		FINISH SEE TABLE 表参照	
G1 CORRECTED FJ00-0132-89 T.F.S.K.		DR. T. NAKAMURA		DE. T. NAKAMURA	
G REVISED J-1520 S.K.S.K.		DATE 4/6/90		APP. <i>Sakaguchi</i>	
F REVISED J-0431 T.F.S.K.		DR. S. KIKUCHI		DATE 4/9/90	
E REVISED J-0298 T.F.S.K.		DATE		DATE	
D REDRAWN J-12413 T.N.S.K.		DATE		DATE	
LTR		DR		CHK	

NAME 圧着タイプ リセコンタクト  
 CRIMP TYPE RECEPTACLE CONTACT  
 (AMP CT CONNECTOR 2mm PITCH)

GENERAL TOLERANCE SIZE LOC NUMBER  
 0-cnc 10 : ±0.2 B J C-175102  
 10-cnc 30 : ±0.25  
 30-cnc 100 : ±0.3  
 ANGLES : 45°

SCALE 10-1 REV. H SHEET 1 OF 2

CUSTOMER DRAWING


NUMBER C-175102




METRIC

DIMENSIONS IN MILLIMETERS. DO NOT SCALE PRINT



PRINT DIST




MATE 0.6 DIA POST  
0.6mmポストと嵌合

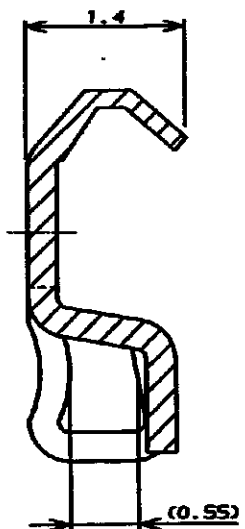

SECT "D" - "D"  
(SCALE 20-1)

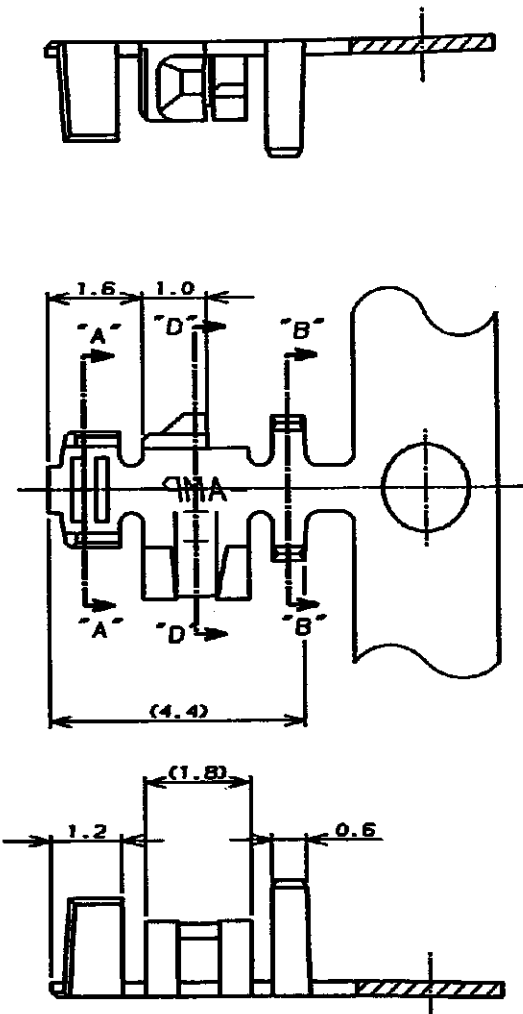

SECT "A" - "A"



SECT "B" - "B"

- 注:
1. 使用ハウジングは型番 175778
  2. 製品規格 : 108-5297
  3. 取付適用規格 : 114-5140

- NOTES:
1. USE HOUSING ; P/N 175778
  2. PRODUCT SPEC ; 108-5297
  3. APPLICATION SPEC ; 114-5140

INACTIVE		NICKEL PLATED PHOSPHOR BRONZE (ONLY CONTACT AREA GOLD PLT. 0.2μ) 焼青銅にニッケル下地、接触部に金めっき0.2μ	175102-2
	175161-1	PRE TINNED PHOSPHOR BRONZE (0.25t) 焼めっき焼青銅 (硬度0.25)	175102-1
	L/P CONTACT L/P端子	MATERIAL & FINISH 材質	PART NO. 型番

Copyright ©19 AMP (Japan), LTD. ALL RIGHTS RESERVED.		<b>AMP</b> AMP (JAPAN), LTD. Tokyo, Japan	
WIRE RANGE 0.12 -0.35mm <sup>2</sup> (AWG26-22)	INSULATION DIA 1.0-1.5 mmφ	NAME 圧着タイプ リセコンタクト CRIMP TYPE RECEPTACLE CONTACT (AMP CT CONNECTOR 2mm PITCH)	
MATERIAL SEE TABLE 表参照	FINISH SEE TABLE 表参照	GENERAL TOLERANCE	SIZE LOC NUMBER
DR. T. NAKAMURA 4/8/90 DE.	DR. T. NAKAMURA 4/8/90 APP.	0-10 : ±0.2 10-30 : ±0.25 30-100 : ±0.3 ANGLES : ±3°	B J C-175102
LTR	REVISION RECORD	DR	CHK DATE
		CHK S. KIKUCHI	DATE 4/20/90
		SCALE 10-1	REV. H SHEET 2 OF 2

CUSTOMER DRAWING