


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION  
 © COPYRIGHT BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC		DIST		REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD		
D		ECO-05-007262	13JAN06	BSV	MM		

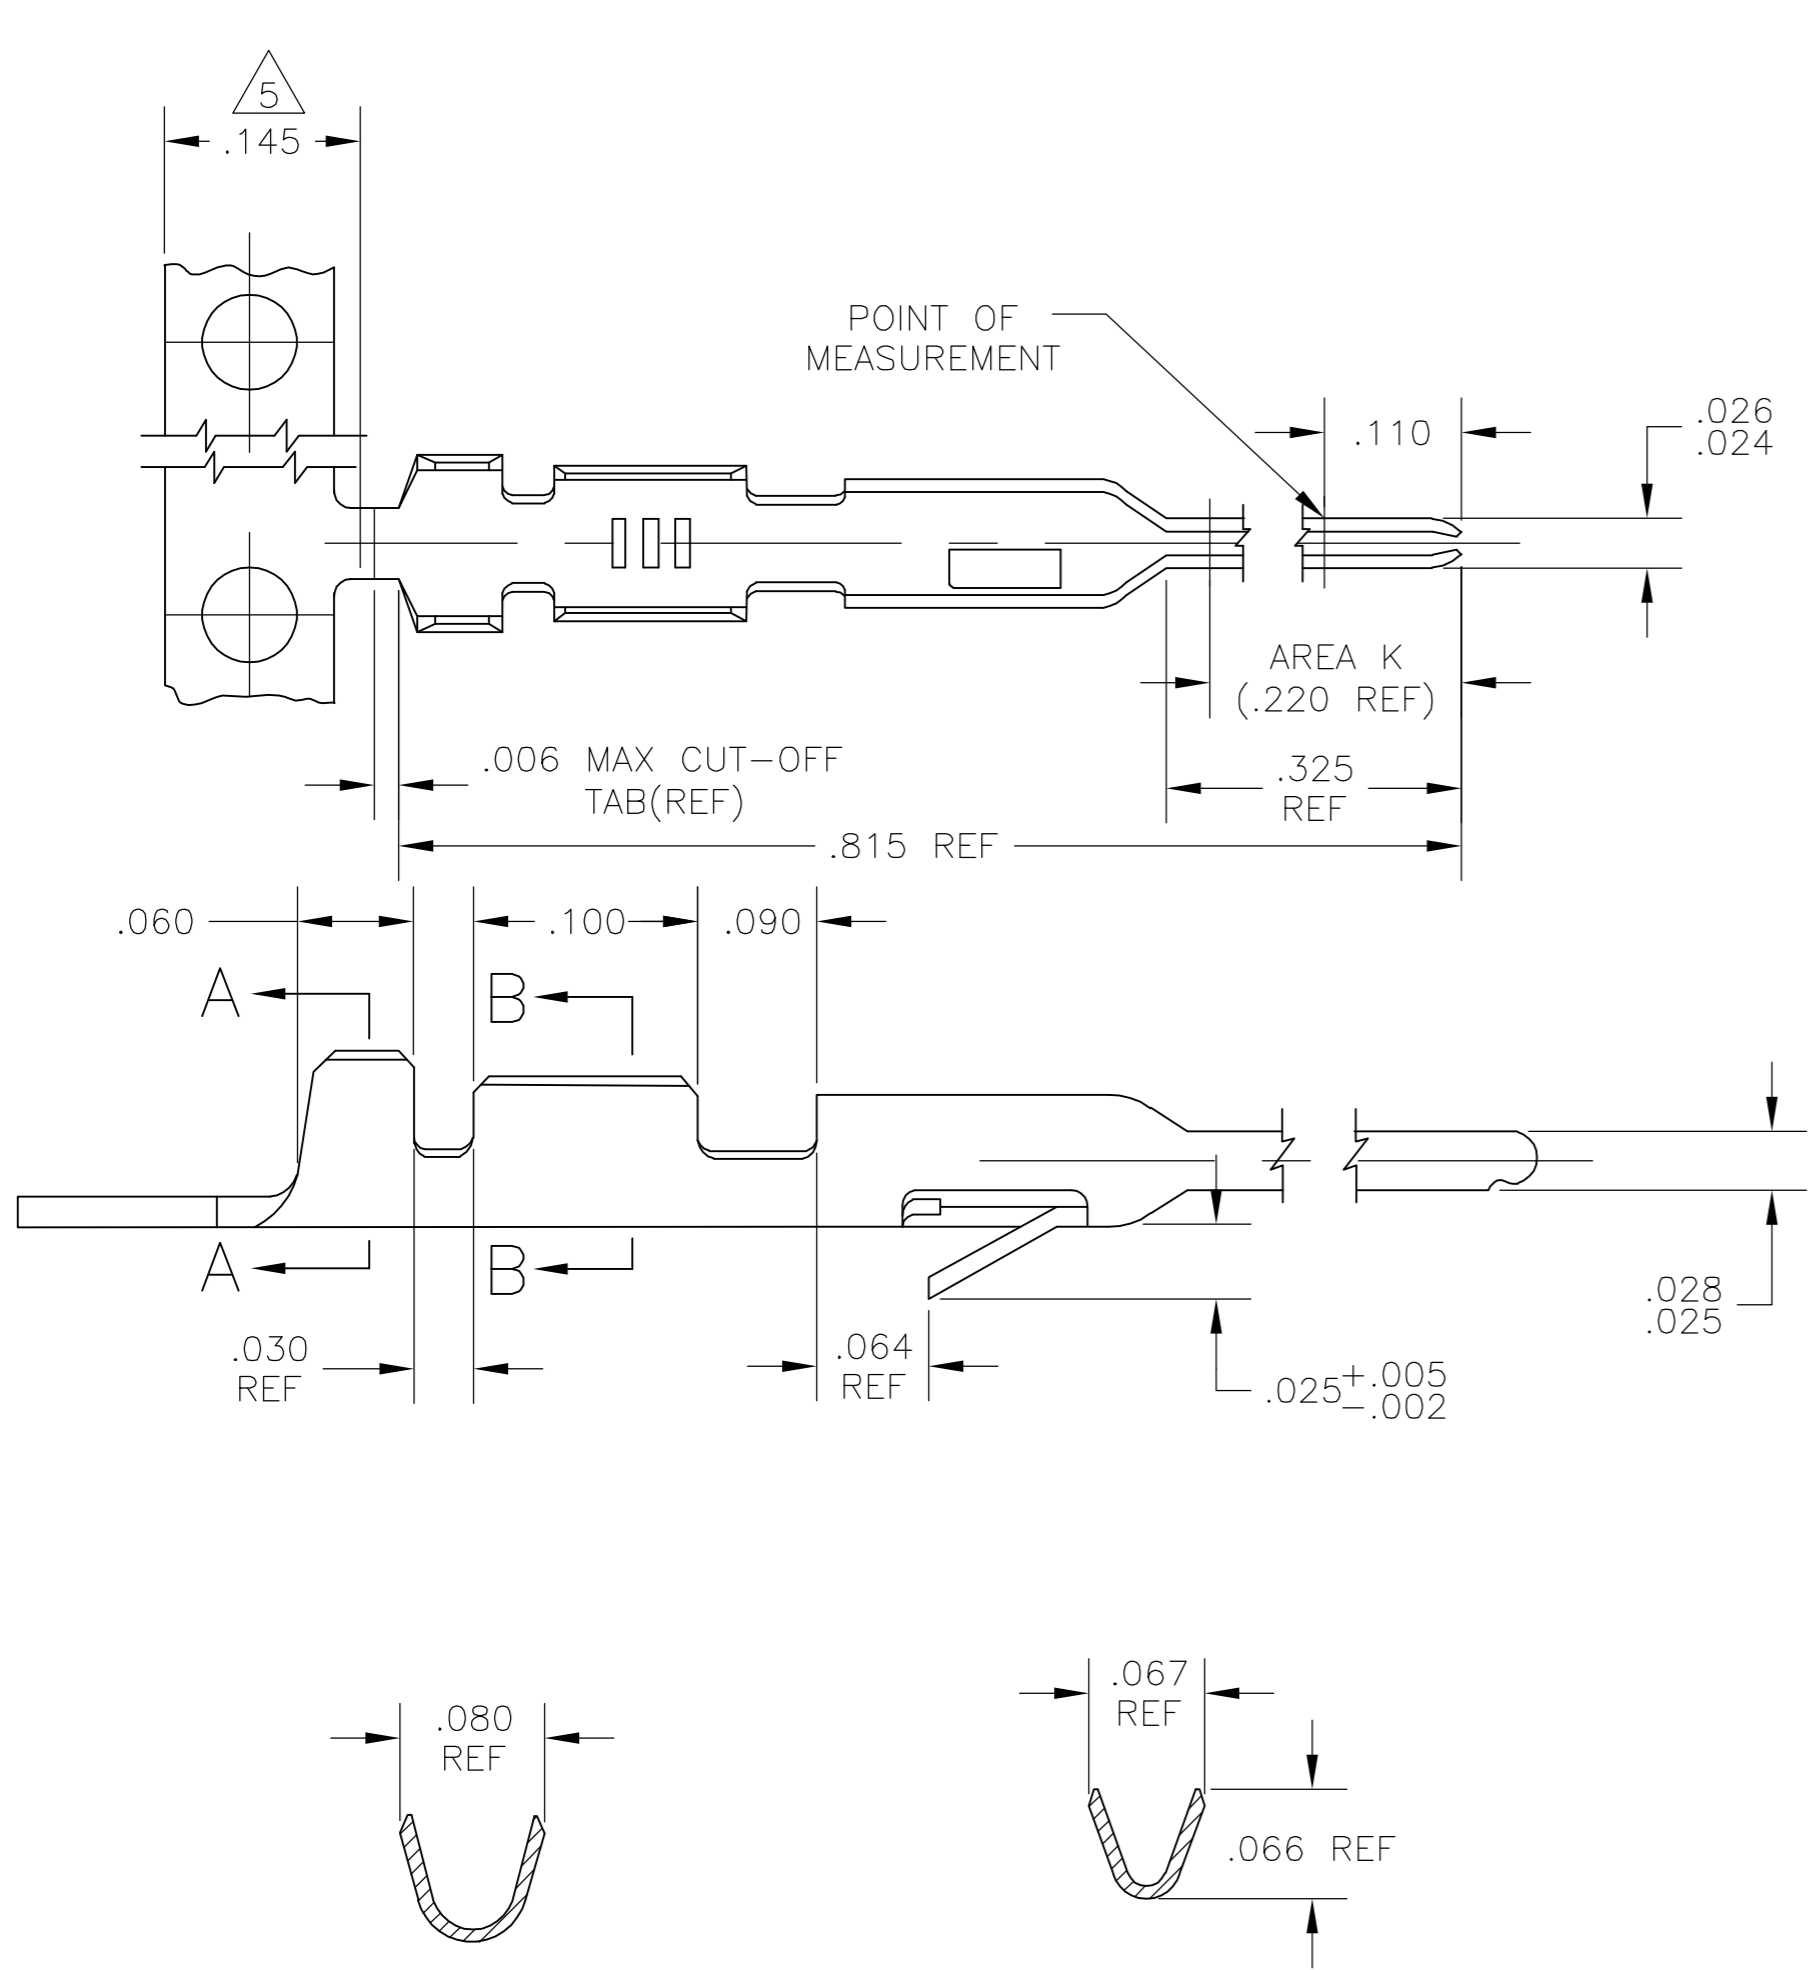

- 1 .000015 ON AREA K, GOLD FLASH ON REMAINDER , OVER .000050 NICKEL.
- 2 .000030 GOLD ON AREA K, GOLD FLASH ON REMAINDER , OVER .000050 NICKEL.
- 3 .000100 TO .000200 BRIGHT TIN OVER .000030 MIN NICKEL ENTIRE CONTACT.
- 4. USE HAND TOOL 90340-1 FOR CRIMPING LOOSE PIECE CONTACTS.
- 5 GOLD PLATING NOT REQUIRED IN THIS AREA(GOLD PLATED PART ONLY).
- 6 .000100 TO .000200 MATTE TIN OVER .000030 MIN NICKEL ENTIRE CONTACT.

INSULATION RANGE .061 MAX  
SECTION A-A

WIRE RANGE #22-#26  
SECTION B-B

5-102107-3	6	5-102095-4
102107-3	3	102095-4
102107-2	2	102095-3
102107-1	1	102095-2
LOOSE PIECE PART NO.	FINISH	PART NO.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	3-31-78	Tyco Electronics Corporation Harrisburg, Pa 17105-3608	
DIMENSIONS: INCHES		CHK	4-10-78		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD	4-14-78	NAME	
0 PLC ± -		PRODUCT SPEC		CONTACT, MOD IV, PIN FOR 22-26 AWG	
1 PLC ± -		APPLICATION SPEC		SIZE	CAGE CODE
2 PLC ± -		FINISH		DRAWING NO	RESTRICTED TO
3 PLC ± .005		MATERIAL		A2	00779
4 PLC ± -		PHOS. BRONZE		C=102095	
ANGLES ± -		SEE TABLE		SCALE	SHEET
FINISH		CUSTOMER DRAWING		10:1	1 OF 1
				REV	D

102095