


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION  
 © COPYRIGHT BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
AD	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
		P		EC 0G3C 0766 04	27DEC04	BSV	JLG

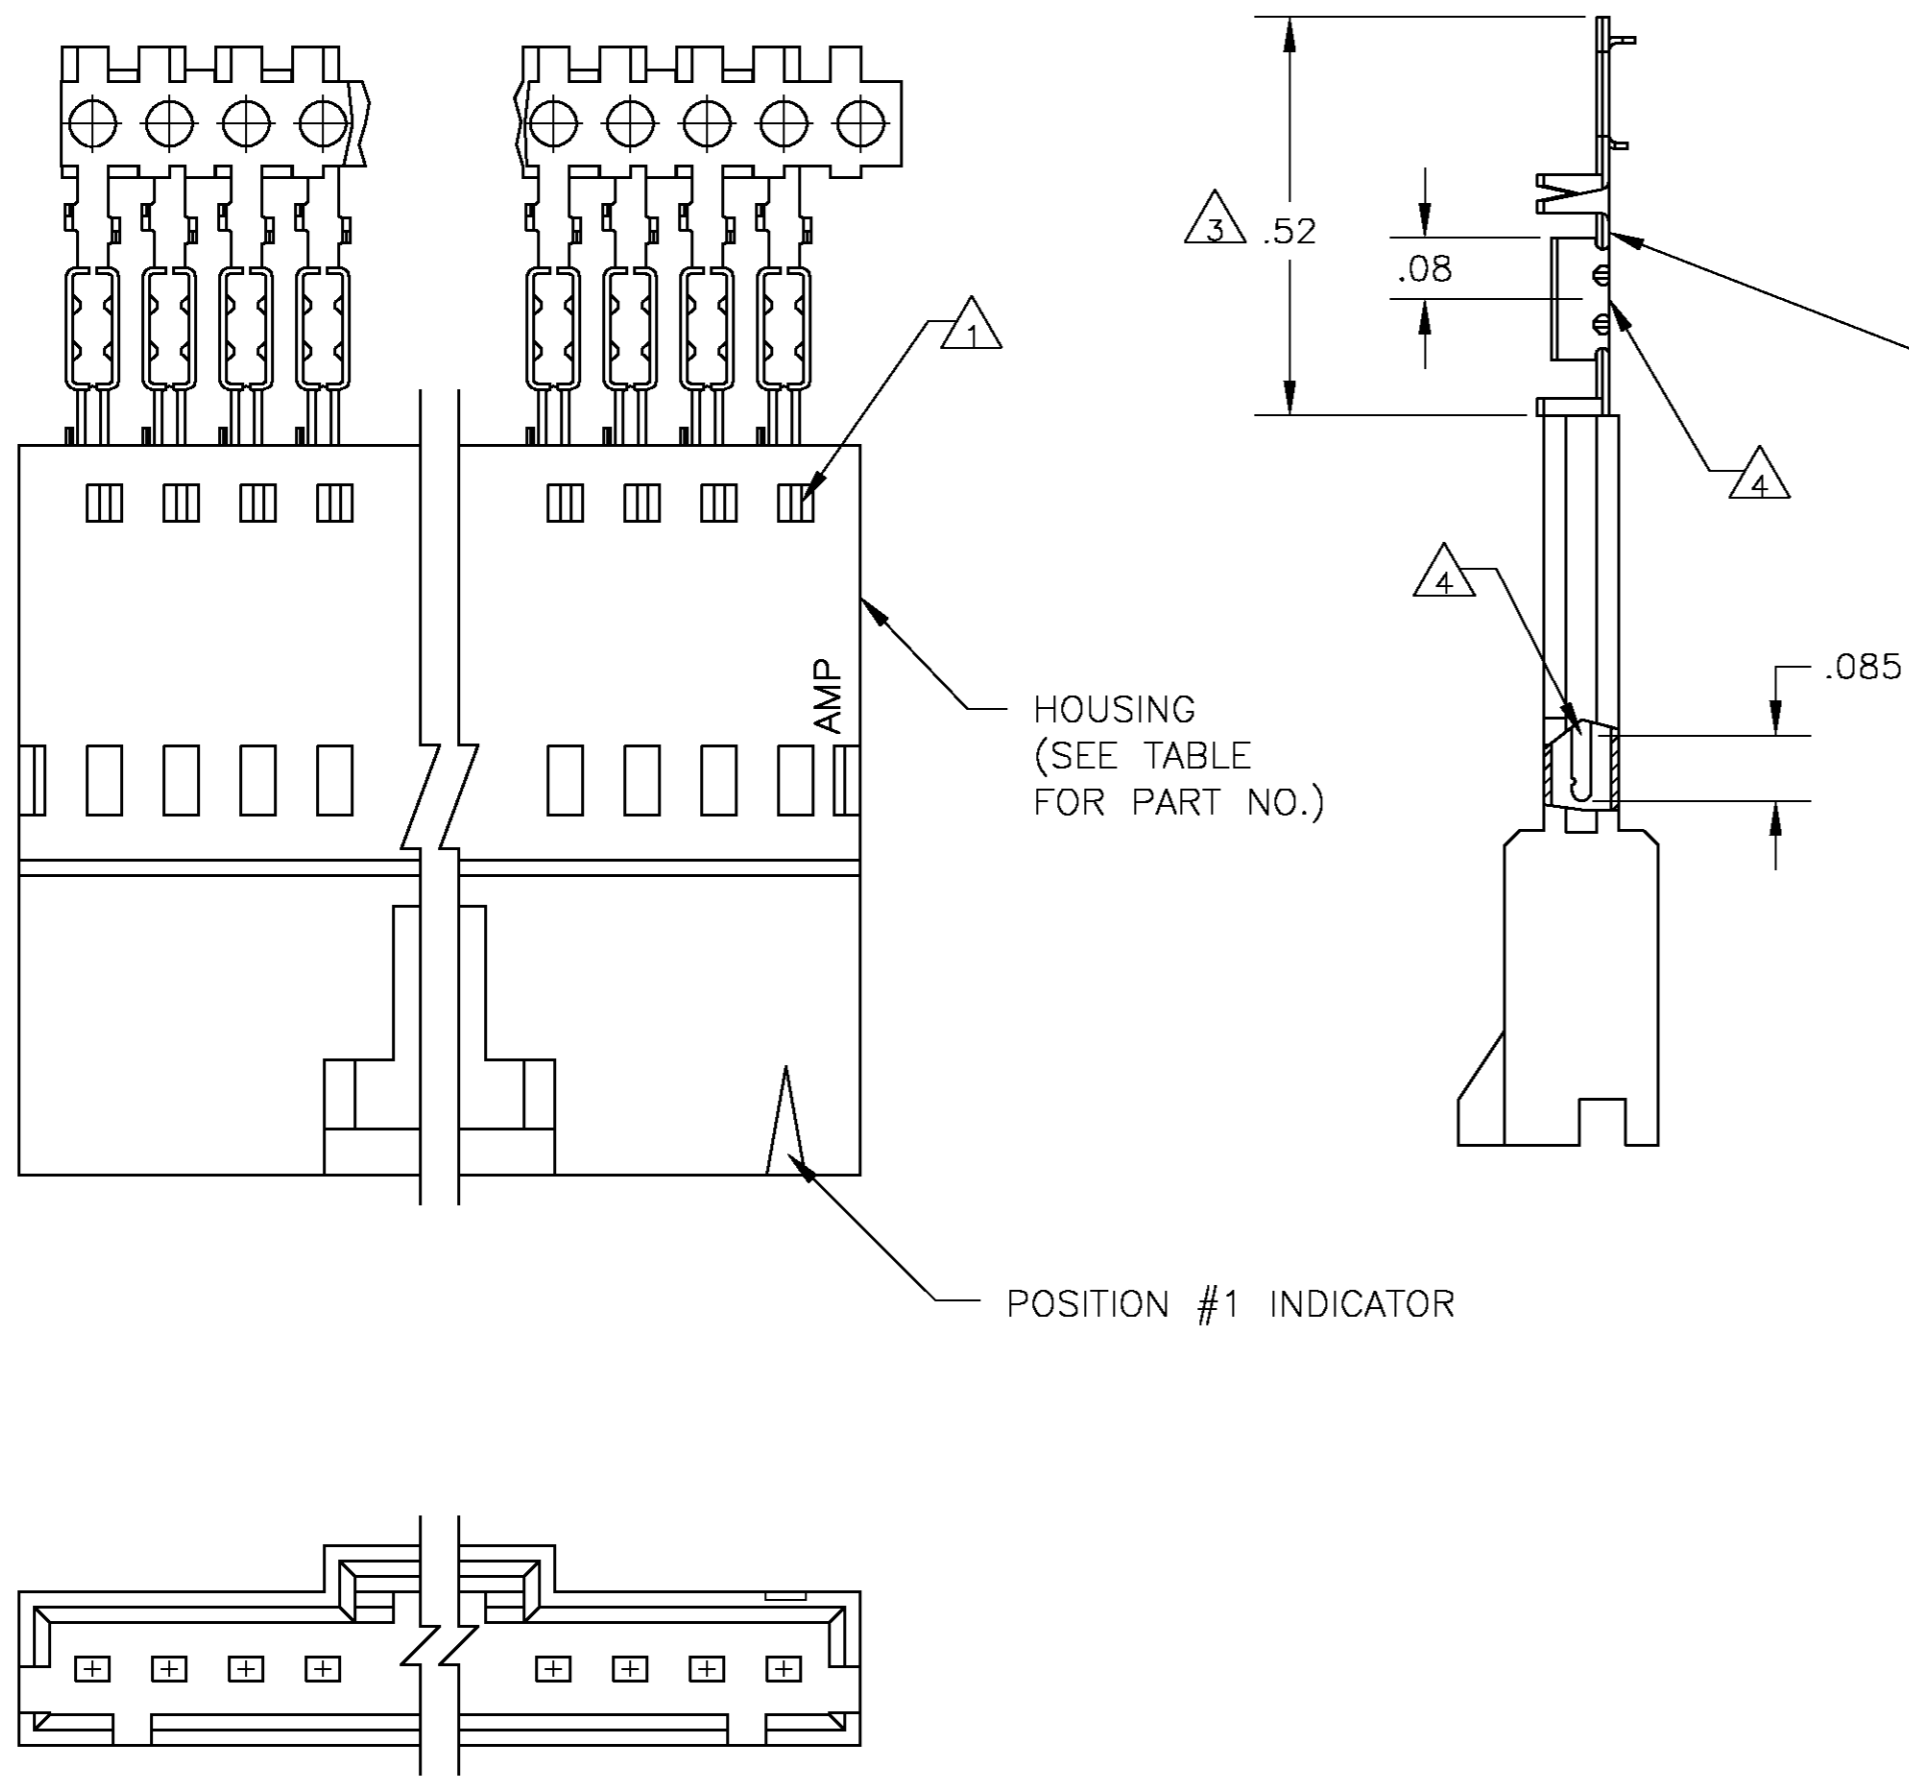

CONTACT IDENTIFICATION LETTER "D" (LOCATED IN THIS AREA)

HOUSING (SEE TABLE FOR PART NO.)

POSITION #1 INDICATOR

8	2-103653-4	25	7-103660-4
8	2-103653-3	24	7-103660-3
8	2-103653-2	23	7-103660-2
8	2-103653-1	22	7-103660-1
8	2-103653-0	21	7-103660-0
8	1-103653-9	20	6-103660-9
8	1-103653-8	19	6-103660-8
8	1-103653-7	18	6-103660-7
8	1-103653-6	17	6-103660-6
8	1-103653-5	16	6-103660-5
8	1-103653-4	15	6-103660-4
8	1-103653-3	14	6-103660-3
8	1-103653-2	13	6-103660-2
7	2-103653-4	25	2-103660-4
7	2-103653-3	24	2-103660-3
7	2-103653-2	23	2-103660-2
7	2-103653-1	22	2-103660-1
7	2-103653-0	21	2-103660-0
7	1-103653-9	20	1-103660-9
7	1-103653-8	19	1-103660-8
7	1-103653-7	18	1-103660-7
7	1-103653-6	17	1-103660-6
7	1-103653-5	16	1-103660-5
7	1-103653-4	15	1-103660-4
7	1-103653-3	14	1-103660-3
7	1-103653-2	13	1-103660-2

SUPERSEDED BY 1-103945-1	1-103653-1	12	1-103660-1
SUPERSEDED BY 1-103945-0	1-103653-0	11	1-103660-0
SUPERSEDED BY 103945-9	103653-9	10	103660-9
SUPERSEDED BY 103945-8	103653-8	9	103660-8
SUPERSEDED BY 103945-7	103653-7	8	103660-7
SUPERSEDED BY 103945-6	103653-6	7	103660-6
SUPERSEDED BY 103945-5	103653-5	6	103660-5
SUPERSEDED BY 103945-4	103653-4	5	103660-4
SUPERSEDED BY 103945-3	103653-3	4	103660-3
SUPERSEDED BY 103945-2	103653-2	3	103660-2
SUPERSEDED BY 103945-1	103653-1	2	103660-1

PLATING	HOUSING PART NUMBER	NO OF POSN	ASSEMBLY PART NUMBER

- 1 CONTACTS ARE LATCHED INTO THE PRELOAD WINDOWS
- 2 USE WITH #22-#26 AWG WIRE SIZE, .054/.030 INSULATION DIAMETER, .015 MAXIMUM INSULATION THICKNESS
- 3 THE DIMENSION APPLIES WITH THE FORWARD PRELOAD STOP IN CONTACT WITH THE HOUSING SURFACE
- 4 POINT OF MEASUREMENT FOR PLATING THICKNESS
- 5 FOR STRIP ASSEMBLIES SEE PART NUMBER 103945
- 6 MATERIAL- HOUSING: FLAME RETARDANT THERMOPLASTIC, COLOR: BLACK PINS: PHOS. BRONZE
- 7 FINISH- PINS: .000015 GOLD IN THE CONTACT AREA, .000050-.000100 BRIGHT TIN-LEAD ON THE TERMINATION AREA, OVER .000050 NICKEL.
- 8 FINISH- PINS: .000015 GOLD IN THE CONTACT AREA, .000050-.000100 MATTE TIN ON THE TERMINATION AREA, OVER .000050 NICKEL.

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN	R.BROWN	26JUL00
CHK	K.WRIGHT	26JUL00
APVD	K.WRIGHT	26JUL00

DIMENSIONS: INCHES  
 TOLERANCES UNLESS OTHERWISE SPECIFIED:  
 0 PLC ± -  
 1 PLC ± -  
 2 PLC ± -  
 3 PLC ± -  
 4 PLC ± -  
 ANGLES ± -  
 FINISH SEE TABLE

MATERIAL  
 6

NAME: SHROUDED PIN ASSY, AMPMODU MTE, SINGLE ROW, .100 CL, POLARIZED, WITH LATCH WINDOWS, FOR #22-#26 AWG WIRE SIZE  
 SIZE: A2 CAGE CODE: 00779 DRAWING NO: 103660  
 WEIGHT: -  
 SCALE: 4:1 SHEET 1 OF 1 REV P

Tyco Electronics Corporation  
 Harrisburg, Pa 17105-3608

CUSTOMER DRAWING