


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD
AD	00	K	EC-0G3C-0766-04	27DEC04	BSV JG

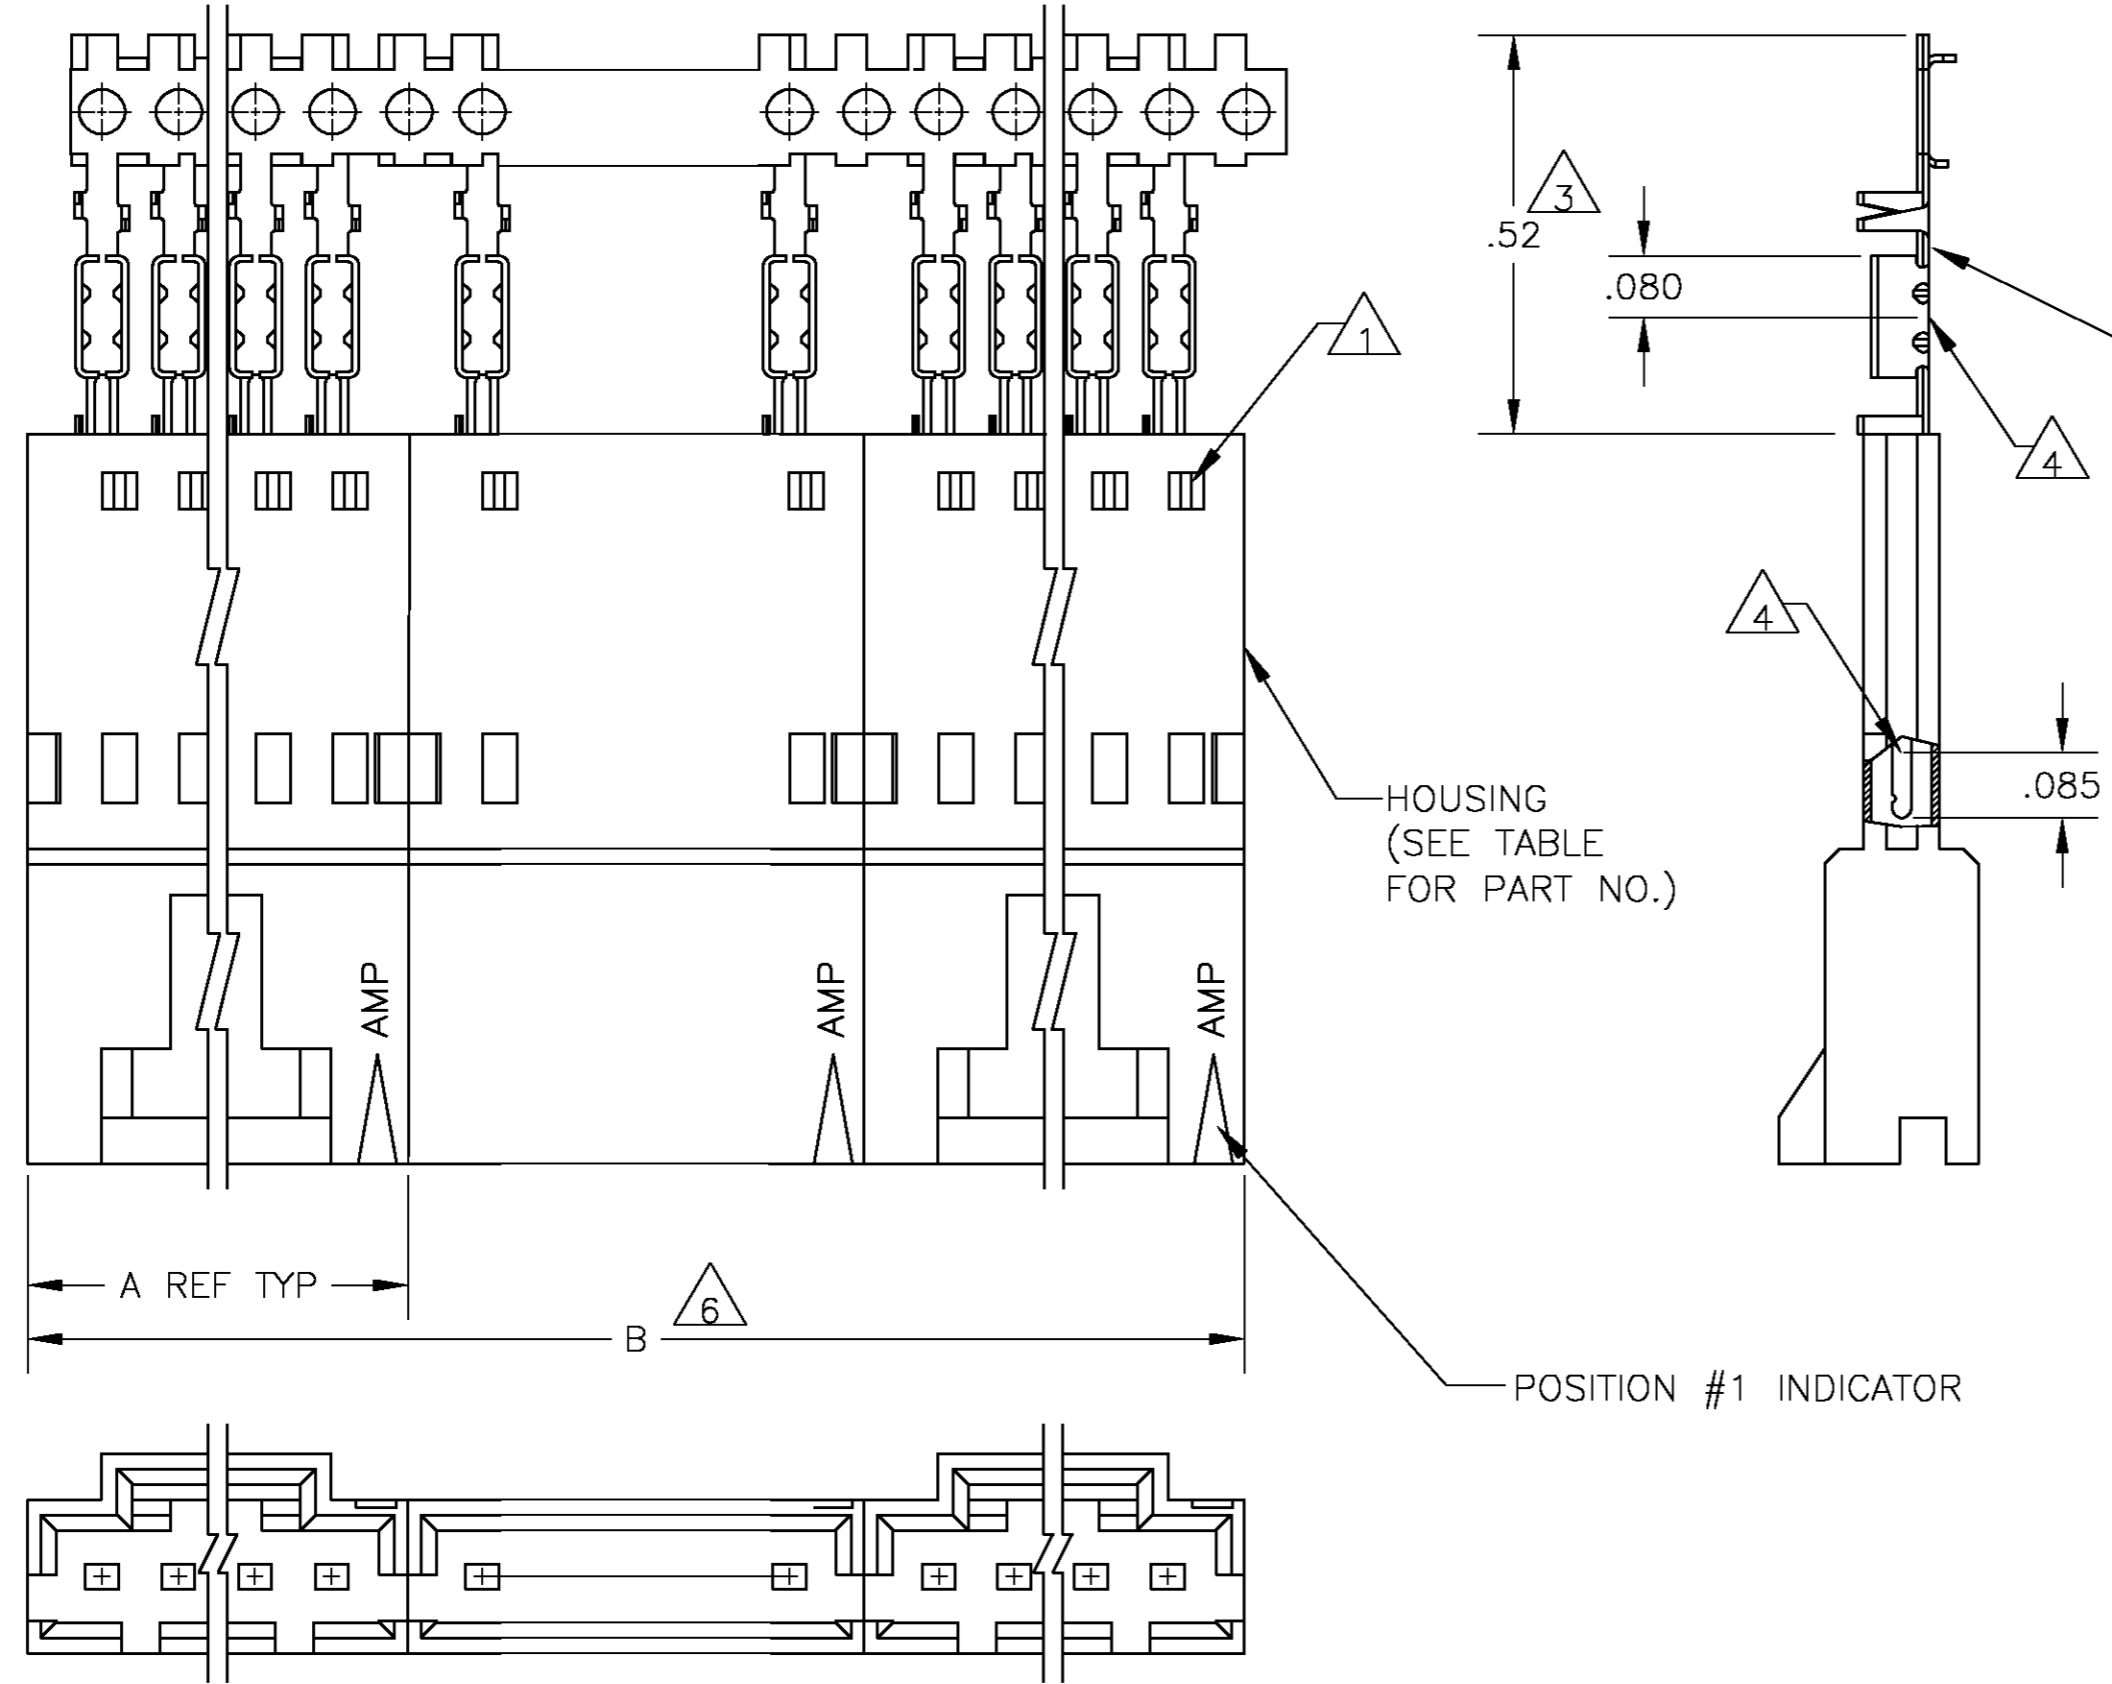

- 1 CONTACTS ARE LATCHED INTO THE PRELOAD WINDOWS
- 2 USE WITH #26-#30 AWG WIRE SIZE, .054/.030 INSULATION DIAMETER, .015 MAXIMUM INSULATION THICKNESS
- 3 THE DIMENSION APPLIES WITH THE FORWARD PRELOAD STOP IN CONTACT WITH THE HOUSING SURFACE
- 4 POINT OF MEASUREMENT FOR PLATING THICKNESS
- 5. FOR INDIVIDUAL ASSEMBLIES SEE PART NUMBER 103894
- 6 ASSEMBLIES ARE JOINED BY THE CARRIER STRIP. ORDER QUANTITY REFLECTS TOTAL NUMBER OF INDIVIDUAL ASSEMBLIES REQUIRED. SEE TABLE FOR NUMBER OF ASSEMBLIES PER STRIP.
- 7 MATERIAL- HOUSING: FLAME RETARDANT THERMOPLASTIC, COLOR: BLACK
PINS: PHOS. BRONZE
- 8 FINISH- PINS: .000030 GOLD IN THE CONTACT AREA, .000050-.000100 BRIGHT TIN-LEAD ON THE TERMINATION AREA, OVER .000050 NICKEL.
- 9 FINISH- PINS: .000030 GOLD IN THE CONTACT AREA, .000050-.000100 MATTE TIN ON THE TERMINATION AREA, OVER .000050 NICKEL.

9	2	2.59	1.295	1-103653-1	12	6-103949-1
9	2	2.39	1.195	1-103653-0	11	6-103949-0
9	2	2.19	1.095	103653-9	10	5-103949-9
9	2	1.99	.995	103653-8	9	5-103949-8
9	2	1.79	.895	103653-7	8	5-103949-7
9	3	2.39	.795	103653-6	7	5-103949-6
9	2	1.39	.695	103653-5	6	5-103949-5
9	4	2.38	.595	103653-4	5	5-103949-4
9	4	1.98	.495	103653-3	4	5-103949-3
9	5	1.98	.395	103653-2	3	5-103949-2
9	8	2.36	.295	103653-1	2	5-103949-1
8	2	2.59	1.295	1-103653-1	12	1-103949-1
8	2	2.39	1.195	1-103653-0	11	1-103949-0
8	2	2.19	1.095	103653-9	10	103949-9
8	2	1.99	.995	103653-8	9	103949-8
8	2	1.79	.895	103653-7	8	103949-7
8	3	2.39	.795	103653-6	7	103949-6
8	2	1.39	.695	103653-5	6	103949-5
8	4	2.38	.595	103653-4	5	103949-4
8	4	1.98	.495	103653-3	4	103949-3
8	5	1.98	.395	103653-2	3	103949-2
8	8	2.36	.295	103653-1	2	103949-1
PLATING	6	B	A	HOUSING PART NUMBER	NO OF POSN	ASSEMBLY PART NUMBER ON STRIP

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN	R BROWN	26JUL00
CHK	K WRIGHT	26JUL00
APVD	K WRIGHT	26JUL00
PRODUCT SPEC	108-25034	
APPLICATION SPEC	114-25026	
WEIGHT	-	
CUSTOMER DRAWING	SCALE 4:1 SHEET 1 OF 1 REV K	

tyco Electronics Tyco Electronics Corporation
Harrisburg, Pa 17105-3608

NAME: SHROUDED PIN ASSY, AMPMODU MTE, SINGLE ROW, .100 CL, POLARIZED, W/ LATCH WINDOWS, FOR #26-#30 AWG WIRE SIZE, STRIP FORM

SIZE: A2 CAGE CODE: 00779 DRAWING NO: 103949 RESTRICTED TO: -