
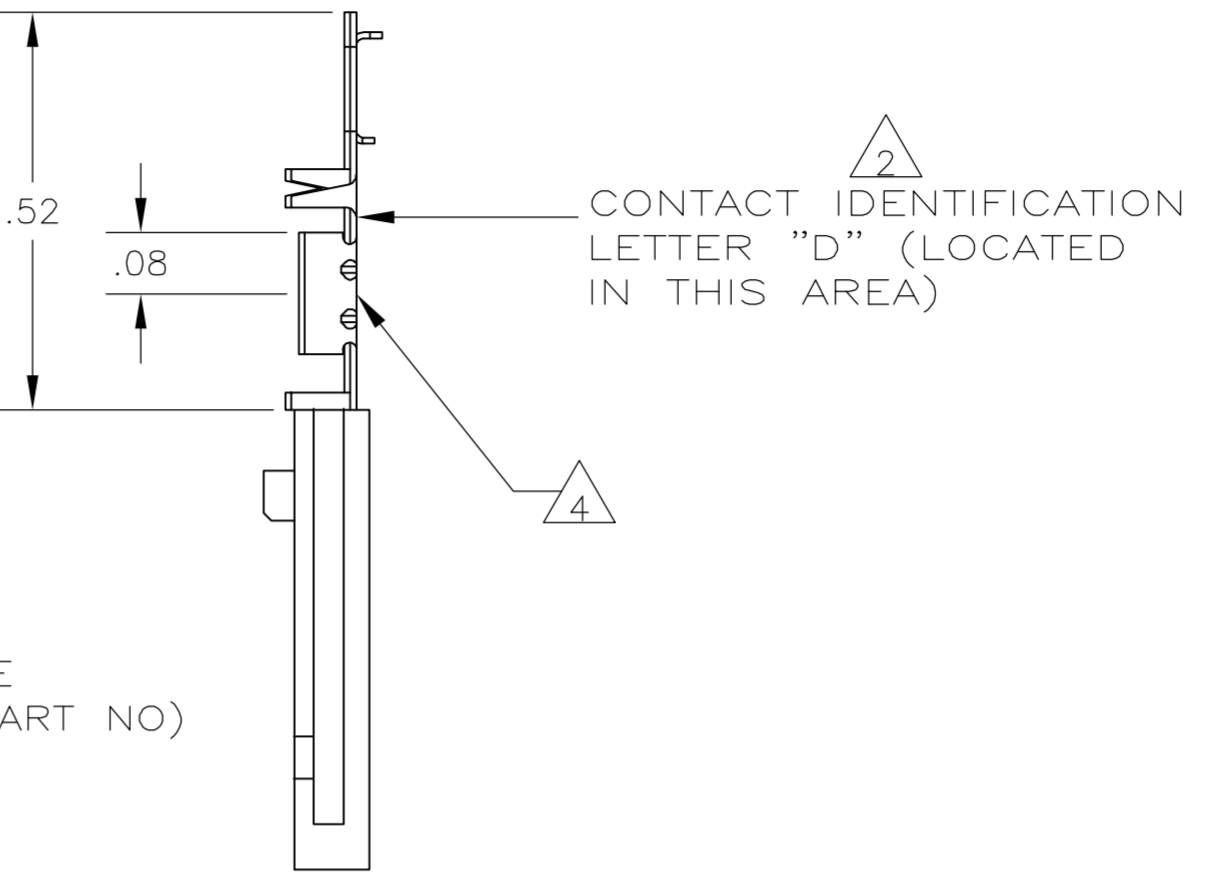


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
AD	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
		J		EC-0G3C-0771-04	28DEC04	BSV	JG

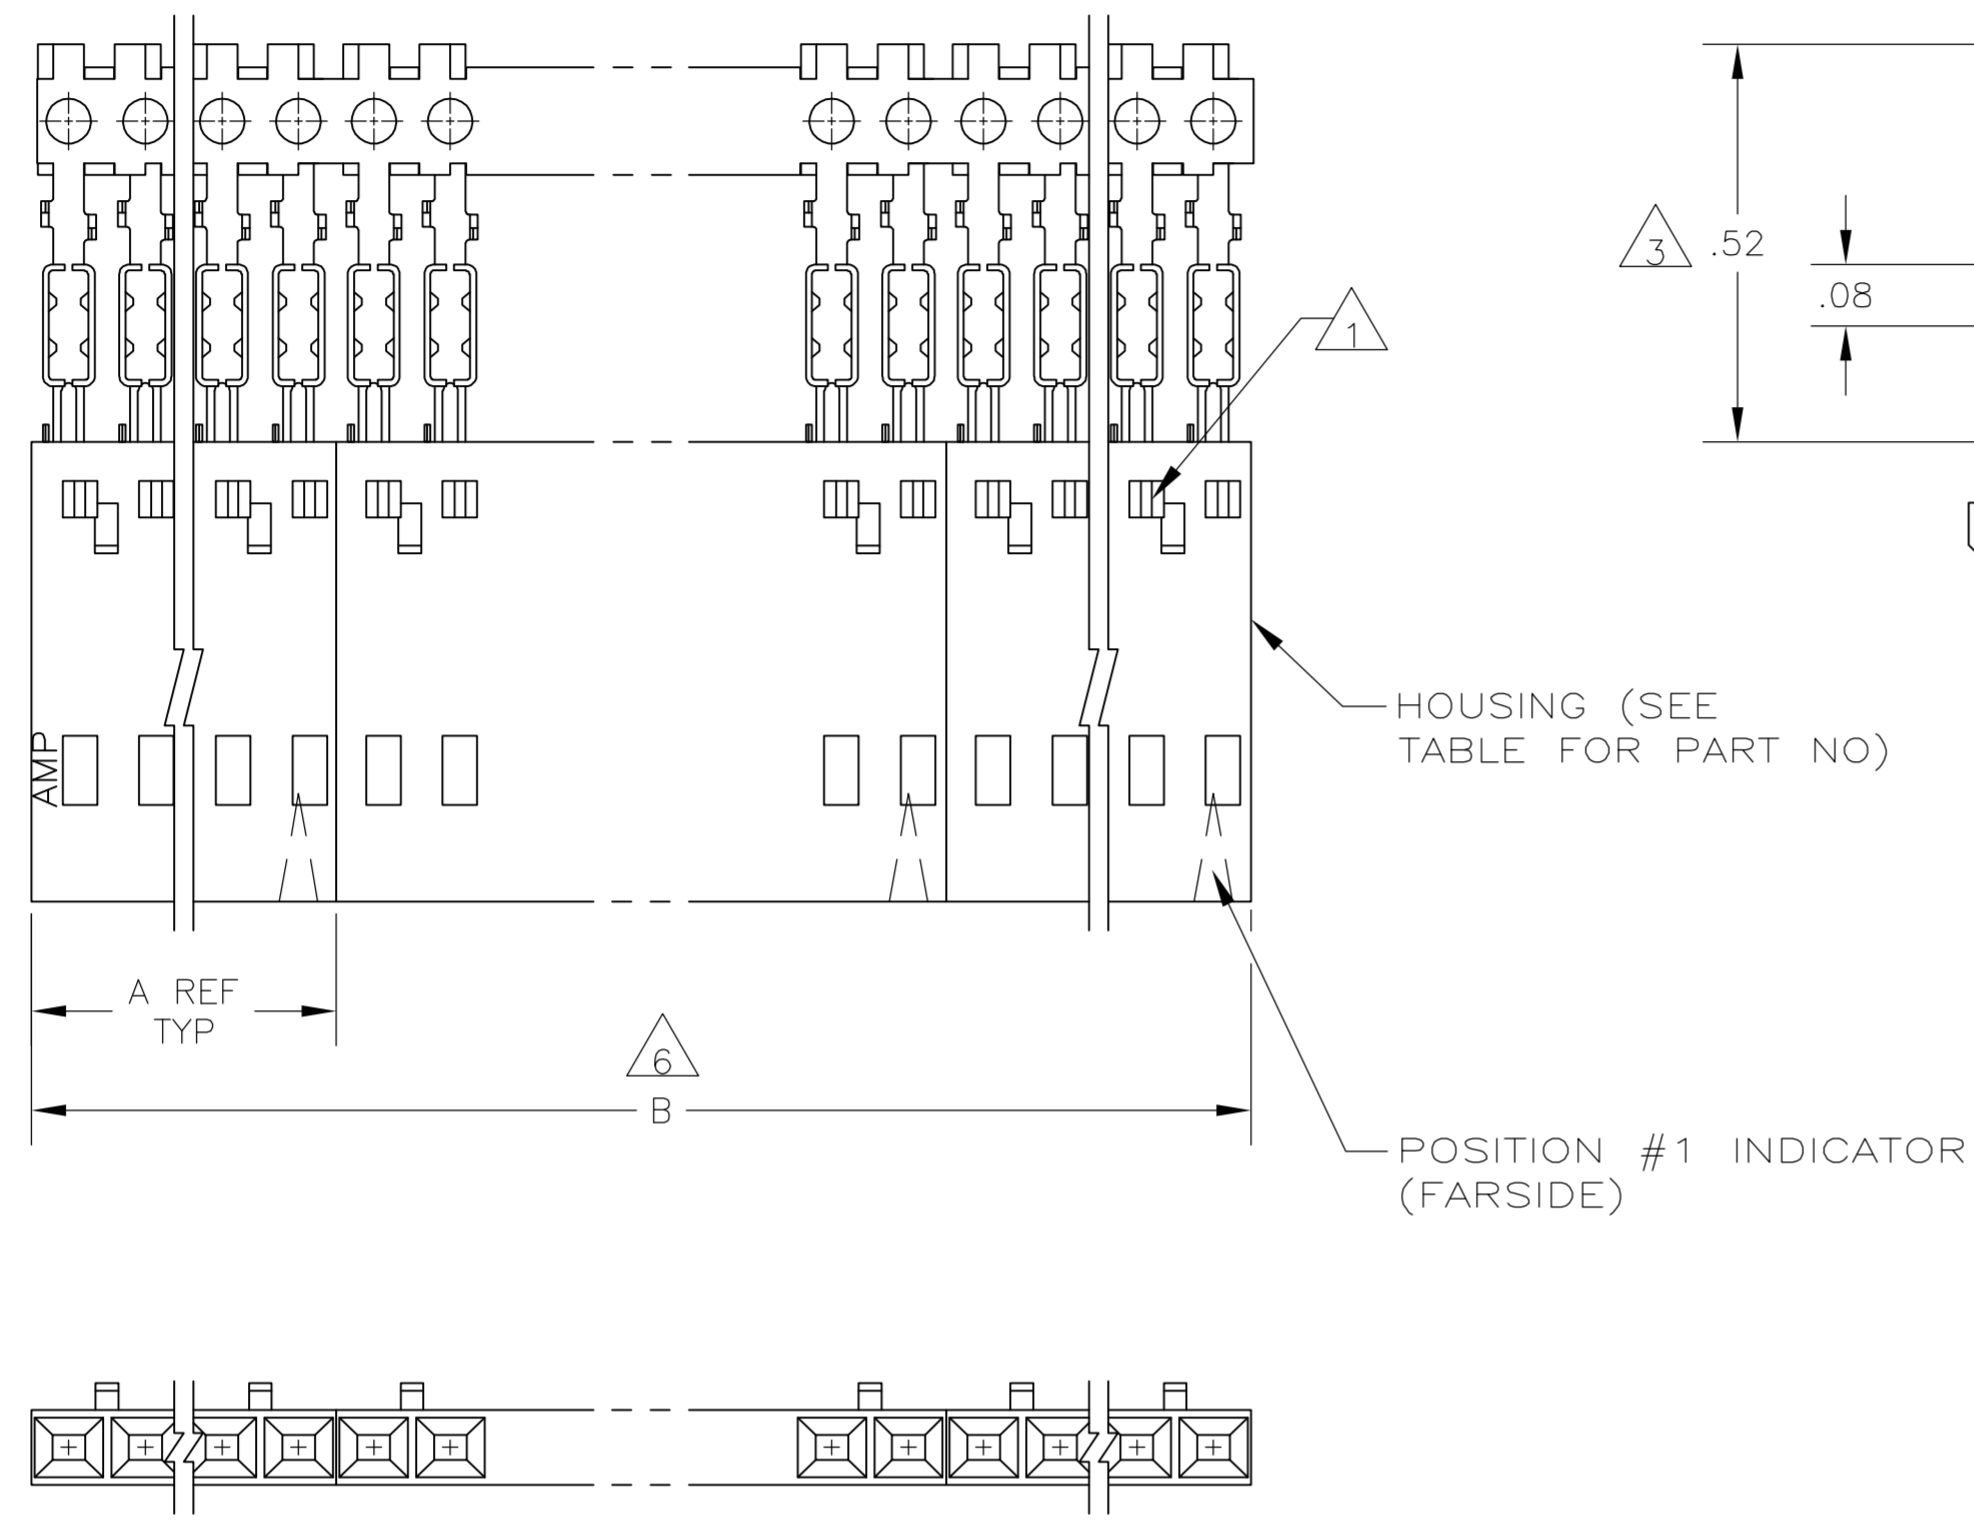

8	2	2.40	1.198	1-104503-1	12	6-103950-1
8	2	2.20	1.098	1-104503-0	11	6-103950-0
8	2	2.00	.998	104503-9	10	5-103950-9
8	2	1.80	.898	104503-8	9	5-103950-8
8	2	1.60	.798	104503-7	8	5-103950-7
8	2	1.40	.698	104503-6	7	5-103950-6
8	4	2.39	.598	104503-5	6	5-103950-5
8	4	1.99	.498	104503-4	5	5-103950-4
8	5	1.99	.398	104503-3	4	5-103950-3
8	5	1.49	.298	104503-2	3	5-103950-2
8	10	1.98	.198	104503-1	2	5-103950-1
7	2	2.40	1.198	1-104503-1	12	1-103950-1
7	2	2.20	1.098	1-104503-0	11	1-103950-0
7	2	2.00	.998	104503-9	10	103950-9
7	2	1.80	.898	104503-8	9	103950-8
7	2	1.60	.798	104503-7	8	103950-7
7	2	1.40	.698	104503-6	7	103950-6
7	4	2.39	.598	104503-5	6	103950-5
7	4	1.99	.498	104503-4	5	103950-4
7	5	1.99	.398	104503-3	4	103950-3
7	5	1.49	.298	104503-2	3	103950-2
7	10	1.98	.198	104503-1	2	103950-1
PLATING	6	B	A	HOUSING PART NUMBER	NO OF POSN	ASSEMBLY PART NUMBER ON STRIP

- 1 CONTACTS ARE LATCHED INTO THE PRELOAD WINDOWS
- 2 USE WITH #22-#26 AWG WIRE SIZE, .054/.030 INSULATION DIAMETER, .015 MAXIMUM INSULATION THICKNESS
- 3 THE DIMENSION APPLIES WITH THE FORWARD PRELOAD STOP IN CONTACT WITH THE HOUSING SURFACE
- 4 POINT OF MEASUREMENT FOR PLATING THICKNESS
- 5. FOR INDIVIDUAL ASSEMBLIES SEE PART NUMBER 103654
- 6 ASSEMBLIES ARE JOINED BY THE CARRIER STRIP. ORDER QUANTITY REFLECTS TOTAL NUMBER OF INDIVIDUAL ASSEMBLIES REQUIRED. SEE TABLE FOR NUMBER OF ASSEMBLIES PER STRIP.
- 7 .000100-.000200 BRIGHT TIN-LEAD OVER .000050 NICKEL
- 8 .000100-.000200 MATTE TIN OVER .000050 NICKEL

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: INCHES	TOLERANCES UNLESS OTHERWISE SPECIFIED:	DWN L. MAYER 11-5-86	Tyco Electronics Corporation Harrisburg, Pa 17105-3608
	0 PLC ± -	CHK P.C.deYONG 11-12-86	
	1 PLC ± -	APVD JEFF SCHEIFFER 11-13-86	
	2 PLC ± .02	PRODUCT SPEC 108-25034	
MATERIAL: HOUSING: FLAME RETARDANT THERMOPLASTIC, COLOR: BLACK, PINS: PHOS BRONZE	FINISH: SEE TABLE	APPLICATION SPEC 114-25026	NAME: PIN ASSEMBLY, AMPMODU MTE, SINGLE ROW, .100 C/L WITH GUIDE RIBS, FOR #22-#26 AWG WIRE SIZE, STRIP FORM SIZE: A2 CAGE CODE: 00779 DRAWING NO: C=103950 RESTRICTED TO: -

CUSTOMER DRAWING SCALE 4:1 SHEET 1 OF 1 REV J