
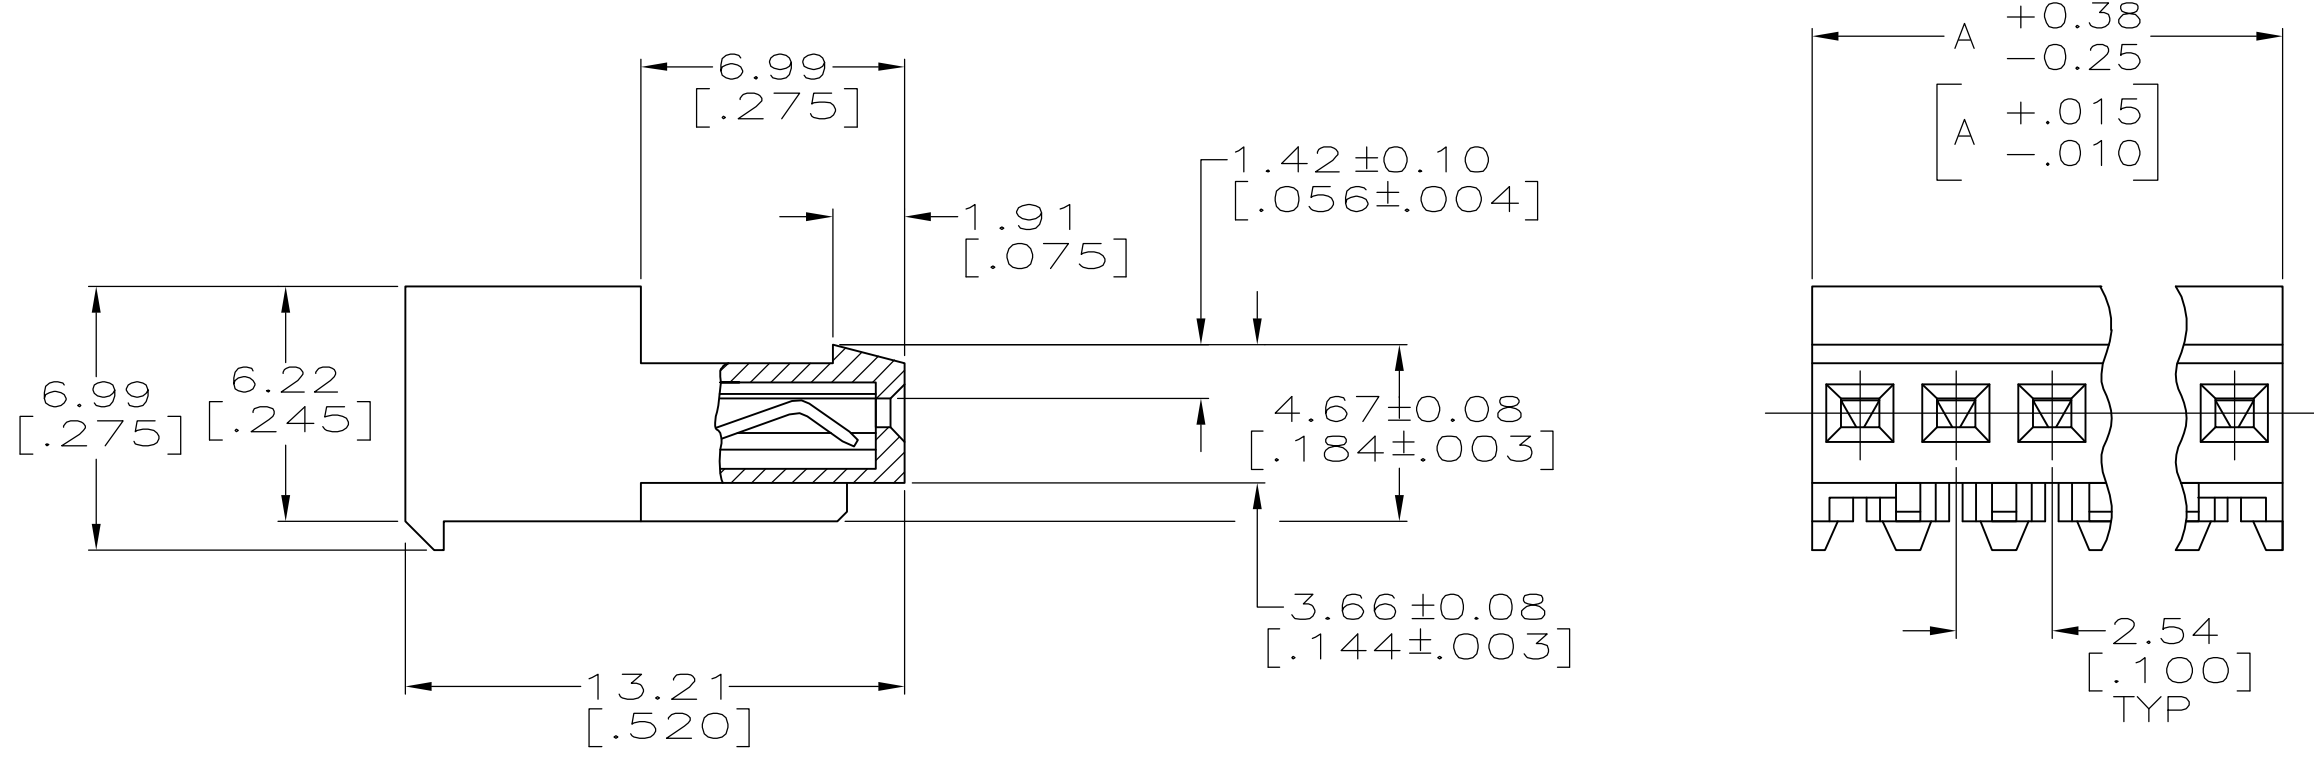


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
CM	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
		R		REV PER ECO-07-003729	26FEB07	KW	DB

YES	71.12[2.800]	28	5-641237-8
YES	68.58[2.700]	27	5-641237-7
YES	66.04[2.600]	26	5-641237-6
YES	63.50[2.500]	25	5-641237-5
YES	60.96[2.400]	24	5-641237-4
YES	58.42[2.300]	23	5-641237-3
YES	55.88[2.200]	22	5-641237-2
YES	53.34[2.100]	21	5-641237-1
YES	50.80[2.000]	20	5-641237-0
YES	48.26[1.900]	19	4-641237-9
YES	45.72[1.800]	18	4-641237-8
YES	43.18[1.700]	17	4-641237-7
YES	40.64[1.600]	16	4-641237-6
YES	38.10[1.500]	15	4-641237-5
YES	35.56[1.400]	14	4-641237-4
YES	33.02[1.300]	13	4-641237-3
YES	30.48[1.200]	12	4-641237-2
YES	27.94[1.100]	11	4-641237-1
YES	25.40[1.000]	10	4-641237-0
YES	22.86[.900]	9	3-641237-9
YES	20.32[.800]	8	3-641237-8
YES	17.78[.700]	7	3-641237-7
YES	15.24[.600]	6	3-641237-6
YES	12.70[.500]	5	3-641237-5
YES	10.16[.400]	4	3-641237-4
YES	7.62[.300]	3	3-641237-3
YES	5.08[.200]	2	3-641237-2
NO	71.12[2.800]	28	2-641237-8
NO	68.58[2.700]	27	2-641237-7
NO	66.04[2.600]	26	2-641237-6
NO	63.50[2.500]	25	2-641237-5
NO	60.96[2.400]	24	2-641237-4
NO	58.42[2.300]	23	2-641237-3
NO	55.88[2.200]	22	2-641237-2
NO	53.34[2.100]	21	2-641237-1
NO	50.80[2.000]	20	2-641237-0
NO	48.26[1.900]	19	1-641237-9
NO	45.72[1.800]	18	1-641237-8
NO	43.18[1.700]	17	1-641237-7
NO	40.64[1.600]	16	1-641237-6
NO	38.10[1.500]	15	1-641237-5
NO	35.56[1.400]	14	1-641237-4
NO	33.02[1.300]	13	1-641237-3
NO	30.48[1.200]	12	1-641237-2
NO	27.94[1.100]	11	1-641237-1
NO	25.40[1.000]	10	1-641237-0
NO	22.86[.900]	9	641237-9
NO	20.32[.800]	8	641237-8
NO	17.78[.700]	7	641237-7
NO	15.24[.600]	6	641237-6
NO	12.70[.500]	5	641237-5
NO	10.16[.400]	4	641237-4
NO	7.62[.300]	3	641237-3
NO	5.08[.200]	2	641237-2
LEADFREE	DIM A	NO. OF CIRCUITS	PART NO.

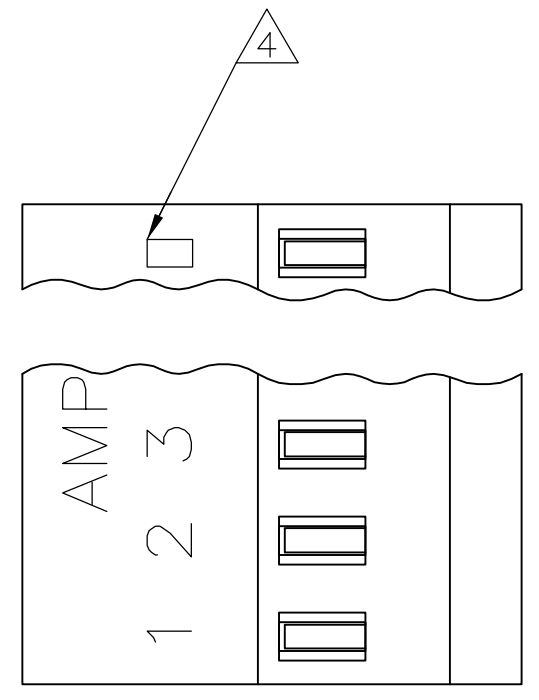

- 1 MATERIAL: CONNECTOR - NYLON UL94V-2 (RED).
CONTACTS - 0.30[.012] THICK COPPER ALLOY
.000076[.000030] GOLD IN CONTACT AREA WITH
BRIGHT TIN-LEAD SLOT AREA FOR 641237-2 THRU 2-641237-8
OR MATTE WHISKER MITIGATED TIN FOR 3-641237-2 THRU
5-641237-8 OVER NICKEL UNDERPLATE.
- 2. CONTACTS ACCEPT 22 AWG WIRE WITH 1.52[.060] MAX
INSULATION DIAMETER.
- 3. CONTACTS MUST ACCEPT 0.64±0.03[.025]
POST AND REMAIN LOCKED IN POSITION.
- 4 IDENTIFICATION NUMBER FOR LAST CIRCUIT MAY
NOT APPEAR ON ALL ASSEMBLIES.
- 5. DIMENSIONS IN BRACKETS ARE IN INCHES.
- 6. HOUSING FEATURES ARE: CLOSED END WITH LOCKING
RAMP.

METRIC

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN S. CARPENTER 11JUN2003	tyco Tyco Electronics Corporation	
DIMENSIONS: mm [INCHES]		CHK D. BOSSI 11JUN2003	Harrisburg, PA 17105-3608	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD D. BOSSI 11JUN2003	NAME MTA 100 CONNECTOR ASSEMBLY, 22 AWG, STANDARD	
0 PLC ±	1 PLC ±	PRODUCT SPEC 108-1050	SIZE A2	CAGE CODE 00779
2 PLC ±	3 PLC ± 0.13 [.005]	APPLICATION SPEC 114-1019	DRAWING NO C=641237	RESTRICTED TO -
4 PLC ±	ANGLES ±	WEIGHT	SCALE 5:1	SHEET 1 of 1
MATERIAL 1	FINISH 1	CUSTOMER DRAWING	REV R	