
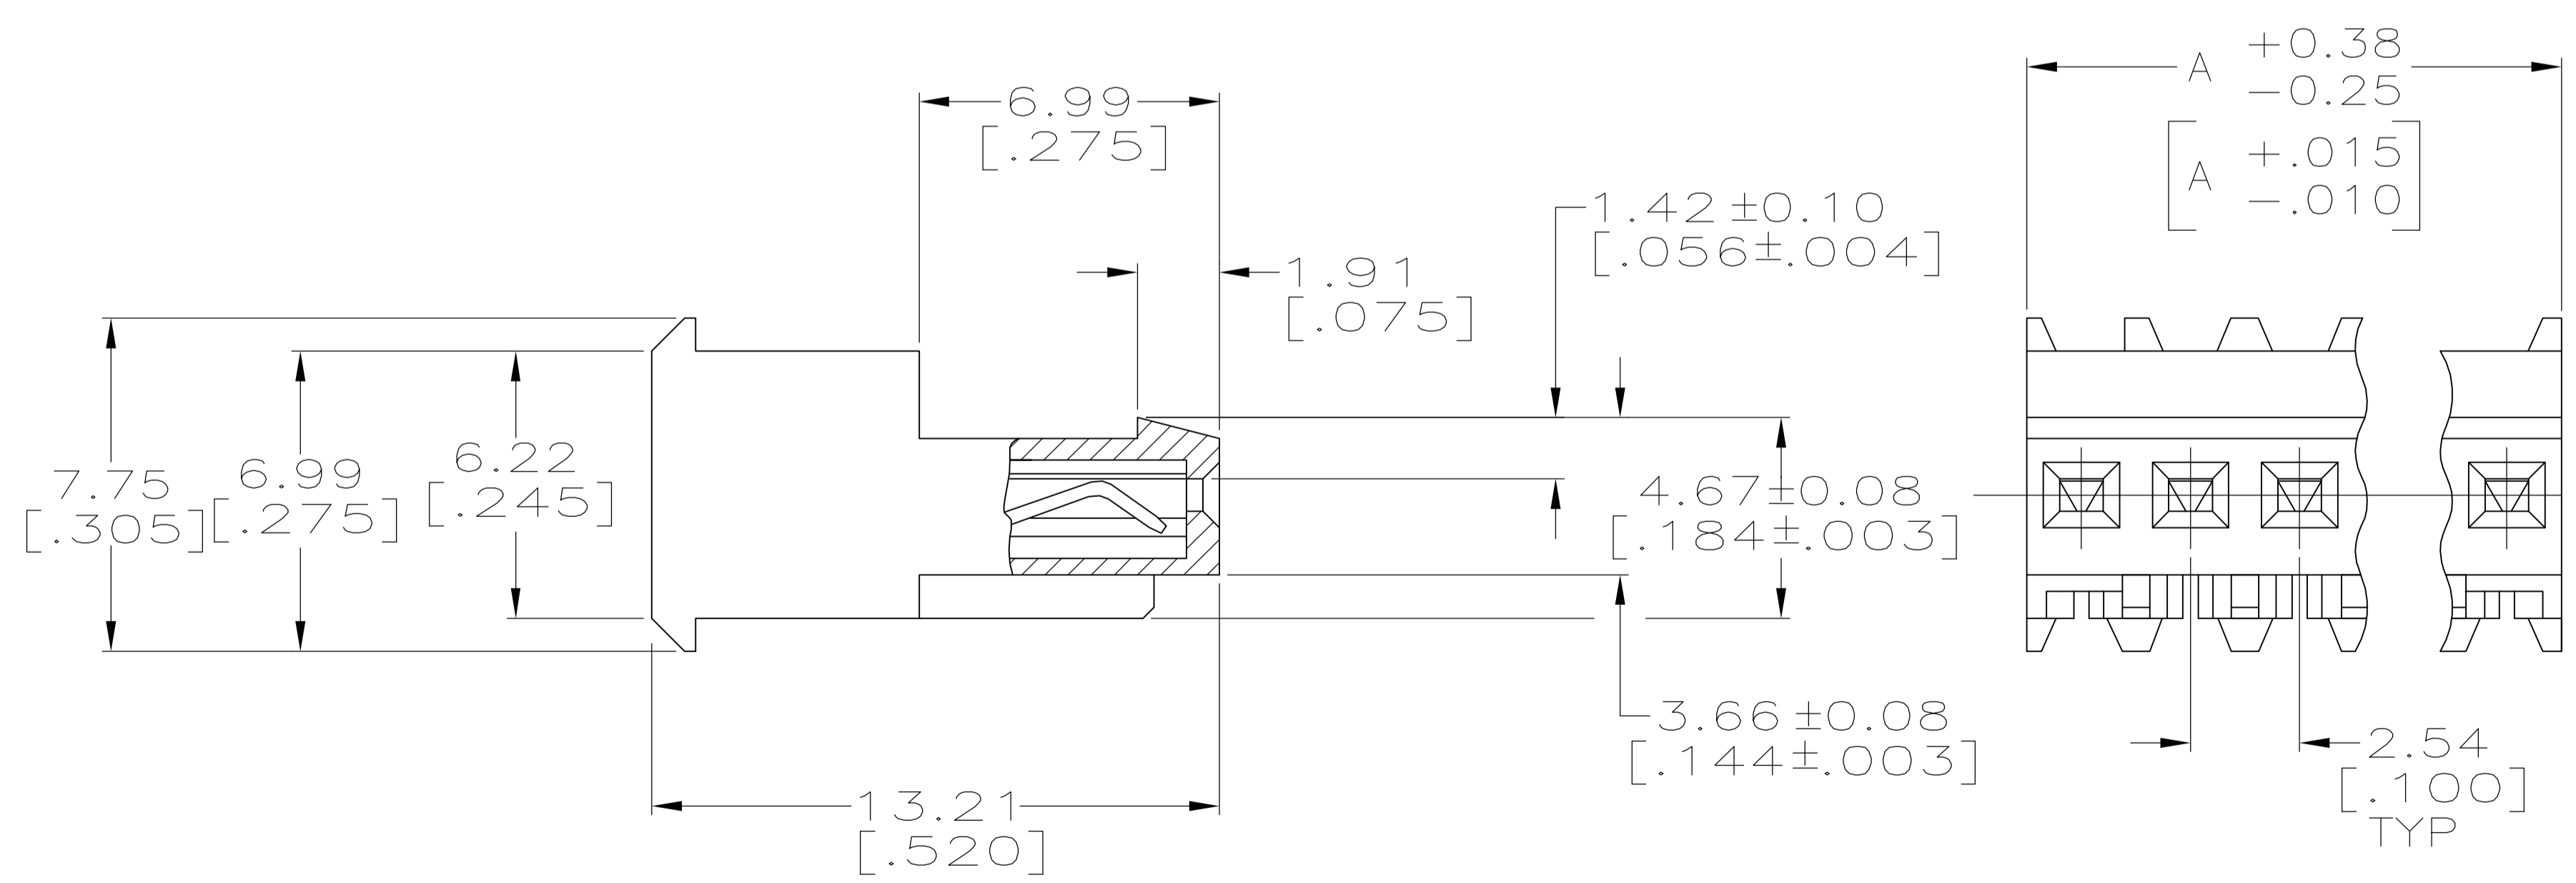


- 1 MATERIAL: CONNECTOR-NYLON UL94V-2 (BLUE).  
 CONTACTS-0.30 [.012] THICK COPPER ALLOY  
 BRIGHT TIN-LEAD 0.00203 [.000080] MINIMUM THICK FOR CONTACTS  
 641655-2 THRU 641655-3,  
 MATTE WHISKER MITIGATED TIN PLATE 0.00203 [.000080] MINIMUM THICK OVER  
 NICKEL UNDERPLATE FOR CONTACTS 3-641655-2 THRU 3-641655-3.
2. CONTACTS ACCEPT 26 AWG WIRE WITH 1.52 [.060] MAXIMUM INSULATION DIAMETER.
3. CONTACTS MUST ACCEPT 0.64±0.03 [.025±.001] SQUARE POST AND REMAIN  
 LOCKED IN POSITION.
- 4 IDENTIFICATION NUMBER FOR LAST CIRCUIT MAY NOT APPEAR ON ALL ASSEMBLIES.
5. DIMENSIONS IN BRACKETS ARE IN INCHES.
6. HOUSING FEATURES ARE: FEED THRU WITH LOCKING RAMP & LED CONTACT.

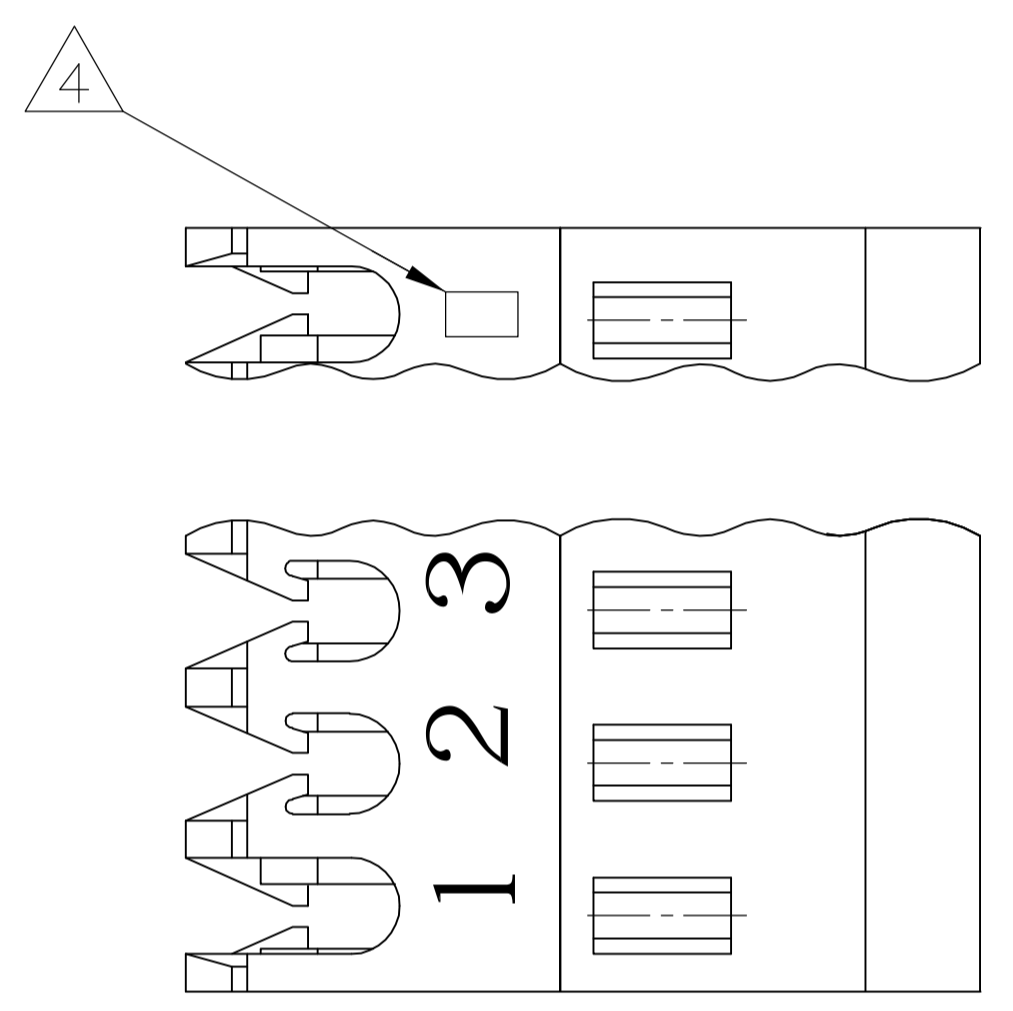

LEAD FREE			
	7.62 [.300]	3	3-641655-3
	5.08 [.200]	2	3-641655-2
	DIM A	NO.OF POSN	ASSEMBLY

CONTAINS LEAD			
	7.62 [.300]	3	641655-3
	5.08 [.200]	2	641655-2
	DIM A	NO.OF POSN	ASSEMBLY

**METRIC**

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm [INCHES]	TOLERANCES UNLESS OTHERWISE SPECIFIED:	0 PLC ±	1 PLC ±	2 PLC ± 0.13 [.005]	3 PLC ±	4 PLC ±	ANGLES ±	FINISH
-------------------------	--	---------	---------	---------------------	---------	---------	----------	--------

APVD: D. BOSSI	10-DEC-2004	NAME: MTA-100 CONNECTOR ASSEMBLY, 26 AWG, FOR .014 TO .020 POST, SPECIAL
PRODUCT SPEC: 108-1050	APPLICATION SPEC: 114-1019	SIZE: A1
WEIGHT: CUSTOMER DRAWING	SCALE: 8:1	SHEET 1 OF 1

RESTRICTED TO: E