


REV	DATE	BY	CHK	APPV	DESCRIPTION
0	10SEP2001	D.M	S.M		RELEASED FJ00-1726-01
A	10MAY2002	D.M	S.M		ADD P/N FJ00-1227-02
B	26DEC02	D.M	S.M		REVISED. ADD P/N FJ00-2621-02
C	30JAN'03	S.Y	S.M		ADD P/N FJ00-2644-02


1473562-4: AS SHOWN
 1473562-4: 本圖

注記
 1 材料: PLUG HOUSING: ガラス入り熱可塑性ポリエステル樹脂 94V-0 黒
 HOLD HOUSING: ポリカーボネイト 94V-0 黄色: 0-、赤色: 1-、青色: 2-
 コンタクト: 銅合金
 2 メッキ: 全面Ni下地: 1.27μm以上
 接点部: 0.2μm MIN 金メッキ
 3 -5(5POS)と-7(7POS)は、回路番号6と8にコンタクトが装着されません

NOTE
 1 MATERIAL: PLUG HOUSING : GLASS FILLED THERMOPLASTIC, 94V-0, BLACK
 HOLD HOUSING : PC, 94V-0, YELLOW: 0- . RED: 1- . BLUE: 2-
 CONTACT : COPPER ALLOY
 2 FINISH: UNDERPLATE : Ni 1.27μm min
 CONTACT AREA : Au 0.2μm min
 3 V--5(5POS) AND X--7(7POS) DO NOT EQUIP WITH CONTACT OF CIRCUIT NO 6 AND 8.




PLUG HOUSING

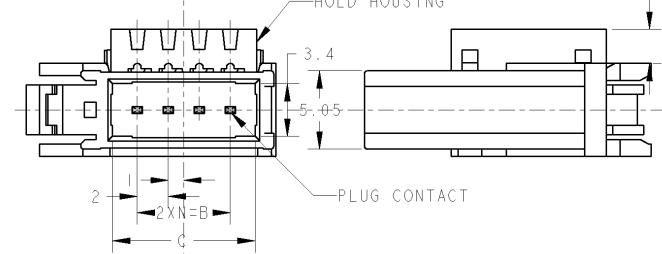

HOLD HOUSING

PLUG CONTACT



<Table of Insulation Dia (Cable suitable for e-CON.)>
 <絶縁外径一覧表 (e-CON 適応電線)>

INSULATION COLOR	INSULATION DIA	P/N	SHEET No
ORANGE	φ0.60~0.90	3-1473562-□	SEE SHEET 3
RED	φ0.90~1.00	1-1473562-□	SEE SHEET 1
YELLOW	φ1.00~1.15	1473562-□	SEE SHEET 1
BLUE	φ1.15~1.35	2-1473562-□	SEE SHEET 1
GREEN	φ1.35~1.60	4-1473562-□	SEE SHEET 2

WIRE RANGE	INSULATION DIA	WIRE RANGE	INSULATION DIA	WIRE RANGE	INSULATION DIA	WIRE RANGE	INSULATION DIA	WIRE RANGE	INSULATION DIA						
BLUE	20.35	17.2	14	24.1	7	8	2-1473562-8	RED	20.35	17.2	14	24.1	7	8	1-1473562-8
YELLOW	20.35	17.2	14	24.1	7	8	1473562-8	BLUE	20.35	17.2	14	24.1	7	7	3-2-1473562-7
BLUE	20.35	17.2	14	24.1	7	7	3-1-1473562-7	RED	20.35	17.2	14	24.1	7	7	3-1473562-7
YELLOW	20.35	17.2	14	24.1	7	7	3-1473562-7	BLUE	16.35	13.2	10	20.1	5	6	2-1473562-6
BLUE	16.35	13.2	10	20.1	5	6	1-1473562-6	RED	16.35	13.2	10	20.1	5	6	1473562-6
YELLOW	16.35	13.2	10	20.1	5	6	1473562-6	BLUE	16.35	13.2	10	20.1	5	5	3-2-1473562-5
BLUE	16.35	13.2	10	20.1	5	5	3-1-1473562-5	RED	16.35	13.2	10	20.1	5	5	3-1473562-5
YELLOW	16.35	13.2	10	20.1	5	5	3-1473562-5	BLUE	12.35	9.2	6	16.1	3	4	2-1473562-4
BLUE	12.35	9.2	6	16.1	3	4	1-1473562-4	RED	12.35	9.2	6	16.1	3	4	1473562-4
YELLOW	12.35	9.2	6	16.1	3	4	1473562-4	BLUE	10.35	7.2	4	14.1	2	3	2-1473562-3
BLUE	10.35	7.2	4	14.1	2	3	1-1473562-3	RED	10.35	7.2	4	14.1	2	3	1473562-3
YELLOW	10.35	7.2	4	14.1	2	3	1473562-3	HOLD HSG COLOR	D	C	B	A	N	POS	P/N


取扱説明書 (Instruction Sheet): 411-78014

THIS DRAWING IS A CONTROLLED DOCUMENT FOR TYCO ELECTRONICS CORPORATION
 IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION
 SHOULD BE CONTACTED FOR THE LATEST REVISION.

DIMENSIONS: 単位: mm	TOLERANCES UNLESS OTHERWISE SPECIFIED: 一般公差 0 PLC ± ±0.2 1 PLC ± ±3* 2 PLC ± ±3* 3 PLC ± ± 4 PLC ± ± ANGLES ± ± FINISH 仕上げ	DWN D. MITSUGI 10SEP2001	DRW S. MANABE 10SEP2001	APPV S. MANABE 10SEP2001	NAME S. MANABE	PRODUCT SPEC 製品仕様 108-5765	APPLICATION SPEC 取付用仕様	SIZE A3	CAGE CODE 00779	DRAWING NO. 番号 C-1473562	RESTRICTED TO
MATERIAL 材料	SEE NOTE	WEIGHT	CUSTOMER DRAWING		SCALE 寸法 4:1	SHEET 1	OF 3	REV C			





WIRE RANGE 絶縁電線番号 SEE 108-5765
 INSULATION DIA 絶縁径
 Tyco Electronics AMP K.K.
 Kawasaki, Japan
 PLUG ASSY FOR e-CON - RITS CONN. -

LOC	DIST	REVISIONS						
J	-	P	LTR	DESCRIPTION	ECN	DATE	DWN	APVD
		-		SEE SHEET 1 OF 3				

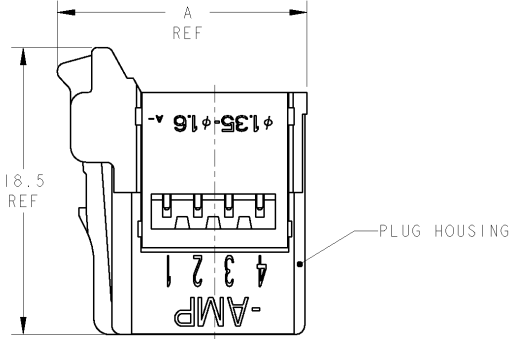


4-1473562-4: AS SHOWN
 4-1473562-4: 本図

- △ 材料 PLUG HOUSING : ガラス入り熱可塑性ポリエステル樹脂 94V-0 黒
 HOLD HOUSING : ポリカーボネイト 94V-0 緑色: 4-
 コンタクト: 銅合金
- △ 仕上げ 全面: ニッケルメッキ下地 1.27μm以上
 接点部: 金メッキ 0.2μm以上
- △ -5(5POS)と-7(7POS)は、回路番号6と8にコンタクトが装着されません
- △ MATERIAL PLUG HOUSING : GLASS FILLED THERMOPLASTIC, 94V-0, BLACK
 HOLD HOUSING : PC, 94V-0, GREEN: 4-
 CONTACT : COPPER ALLOY
- △ FINISH UNDERPLATE : Ni PLATING ALL SURFACE 1.27μm MIN
 CONTACT AREA : Au PLATING 0.2μm MIN
- △ -5(5POS) AND -7(7POS) DO NOT EQUIP WITH CONTACT OF CIRCUIT NO 6 AND 8.

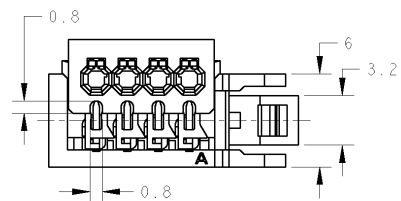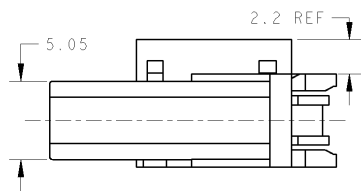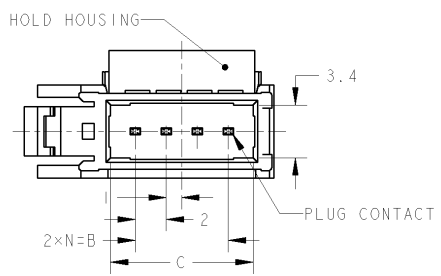

HOLD HSG COLOR	GREEN								D	C	B	A	N POS.	PART NUMBER
	20.35	17.2	14	24.1	7	8	4-1473562-8							
	20.35	17.2	14	24.1	7	7	△4-1473562-7							
	16.35	13.2	10	20.1	5	6	4-1473562-6							
	16.35	13.2	10	20.1	5	5	△4-1473562-5							
	12.35	9.2	6	16.1	3	4	4-1473562-4							
	10.35	7.2	4	14.1	2	3	4-1473562-3							

取扱説明書 (Instruction Sheet): 411-78014







DIMENSIONS: 単位: mm TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± 1 PLC ±0.2 2 PLC ±3 3 PLC ± 4 PLC ± ANGLES ±		DWG: K. RIKU 26DEC02 CHN: D. MITSUGI 26DEC02 APVD: S. MANABE 26DEC02 PRODUCT SPEC: 108-5765 APPLICATION SPEC: 取付用規格		NAME: Tyco Electronics Tyco Electronics AMP K.K. Kawasaki, Japan	
MATERIAL: SEE NOTE FINISH: SEE NOTE		SIZE: A3 CAGE CODE: 00779 DRAWING NO.: C-1473562		RESTRICTED TO: - SCALE: 3.1 SHEET: 2 OF 3 REV: C	

LOC	DIST	REVISIONS						
J	-	P	LTR	DESCRIPTION	ECN	DATE	DWN	APVD
				SEE SHEET 1 OF 3				

3-1473562-4 : AS SHOWN
 3-1473562-4 : 本図

- ① 材料: PLUG HOUSING : ガラス入り熱可塑性ポリエステル樹脂 94V-0 黒
 HOLD HOUSING : ポリカーボネイト 94V-0 オレンジ色: 3-
 コンタクト: 銅合金
- ② メッキ: 全面ニッケル下地: 1.27μm以上
 接点部: 金メッキ: 0.2μm以上
- ③ -5(5POS)と-7(7POS)は、回路番号6と8にコンタクトが装着させられます。

- ① MATERIAL: PLUG HOUSING : GLASS FILLED THERMOPLASTIC, 94V-0, BLACK
 HOLD HOUSING : PC, 94V-0, ORANGE: 3-
 CONTACT : COPPER ALLOY
- ② FINISH: UNDERPLATE : Ni 1.27μm MIN
 CONTACT AREA : Au 0.2μm MIN
- ③ -5(5POS) AND -7(7POS) DO NOT EQUIP WITH CONTACT OF CIRCUIT No. 6 & 8.

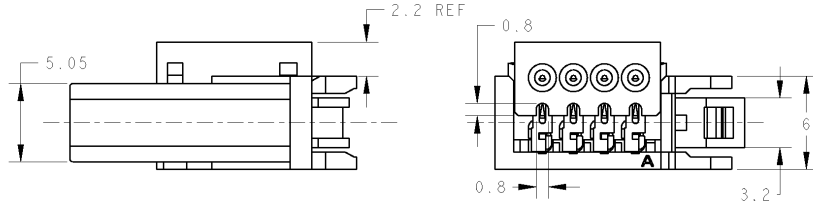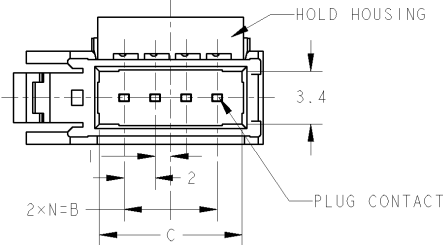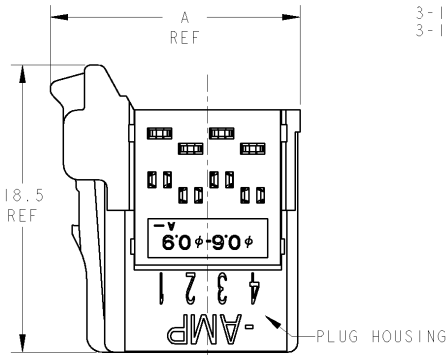

HOLD HSG COLOR	D	C	B	A	N	POS.	P/N
	20.35	17.2	14	24.1	7	8	3-1473562-8
	20.35	17.2	14	24.1	7	③	③3-1473562-7
ORANGE	16.35	13.2	10	20.1	5	6	3-1473562-6
	16.35	13.2	10	20.1	5	5	③3-1473562-5
	12.35	9.2	6	16.1	3	4	3-1473562-4
	10.35	7.2	4	14.1	2	3	3-1473562-3

取扱説明書(Instruction Sheet): 411-78010

<small>THIS DRAWING IS A CONTROLLED DOCUMENT FOR TYCO ELECTRONICS CORPORATION IT IS SUBJECT TO CHANGE AND THE CONTROLLING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.</small>		DWN S. YOKOZAKI 21 JAN '03 CHN D. MITSUGI 30 JAN '03 APVD S. MANABE 30 JAN '03		tyco Electronics Tyco Electronics AMP K.K. Kawasaki, Japan	
DIMENSIONS: 単位: mm TOLERANCES UNLESS OTHERWISE SPECIFIED: 一般公差 0 PLC ± 0.2 1 PLC ± 0.2 2 PLC ± 3° 3 PLC ± 4 PLC ± ANGLES ±		PRODUCT SPEC 108-5765 APPLICATION SPEC 取得規格		NAME PLUG ASSY FOR e-CON - RITS CONN. -	
MATERIAL ① SEE NOTE FINISH ② SEE NOTE		WEIGHT - SIZE A3 CAGE CODE 00779 DRAWING NO. C-1473562		RESTRICTED TO - SCALE 4:1 SHEET 3 OF 3 REV C	
CUSTOMER DRAWING					