


- 1 MOLDING PARTS: POLYESTER, UL RATED 94V-0, BLACK.
CONTACTS: BERYLLIUM COPPER.
- 2 2.54 μm [.000100] MIN TIN-LEAD ON TERMINATION END,
0.76 μm [.000030] MIN GOLD ON CONTACT AREA, ALL OVER
1.27 μm [.000050] MIN NICKEL.
- 3 POSITION TOLERANCE APPLIES 0.76 [.030] ABOVE DATUM V.
- 4 POSITION NUMBER 1 INDICATOR.
- 5 ELECTRICAL ENGAGEMENT ZONE.
- 6 RECOMMENDED 28 AWG RIBBON CABLE, 0.61 - 0.97 [.024 - .038]
THICK PVC, 1.0000 [.03937] PITCH.
AMP LOGO ORIENTATION IS OPTIONAL.
- 7 RECESS ON EACH END, OPPOSITE CORNER.
- 8 0.13 μm [.000005] MIN GOLD ON TERMINATION END,
0.76 μm [.000030] MIN GOLD ON CONTACT AREA, ALL OVER
1.27 μm [.000050] MIN NICKEL.
- 10 MOLD GATE PROJECTION ON EITHER END OF COVER TO BE
EXCLUDED FROM DIMENSION 'B' MEASUREMENT.

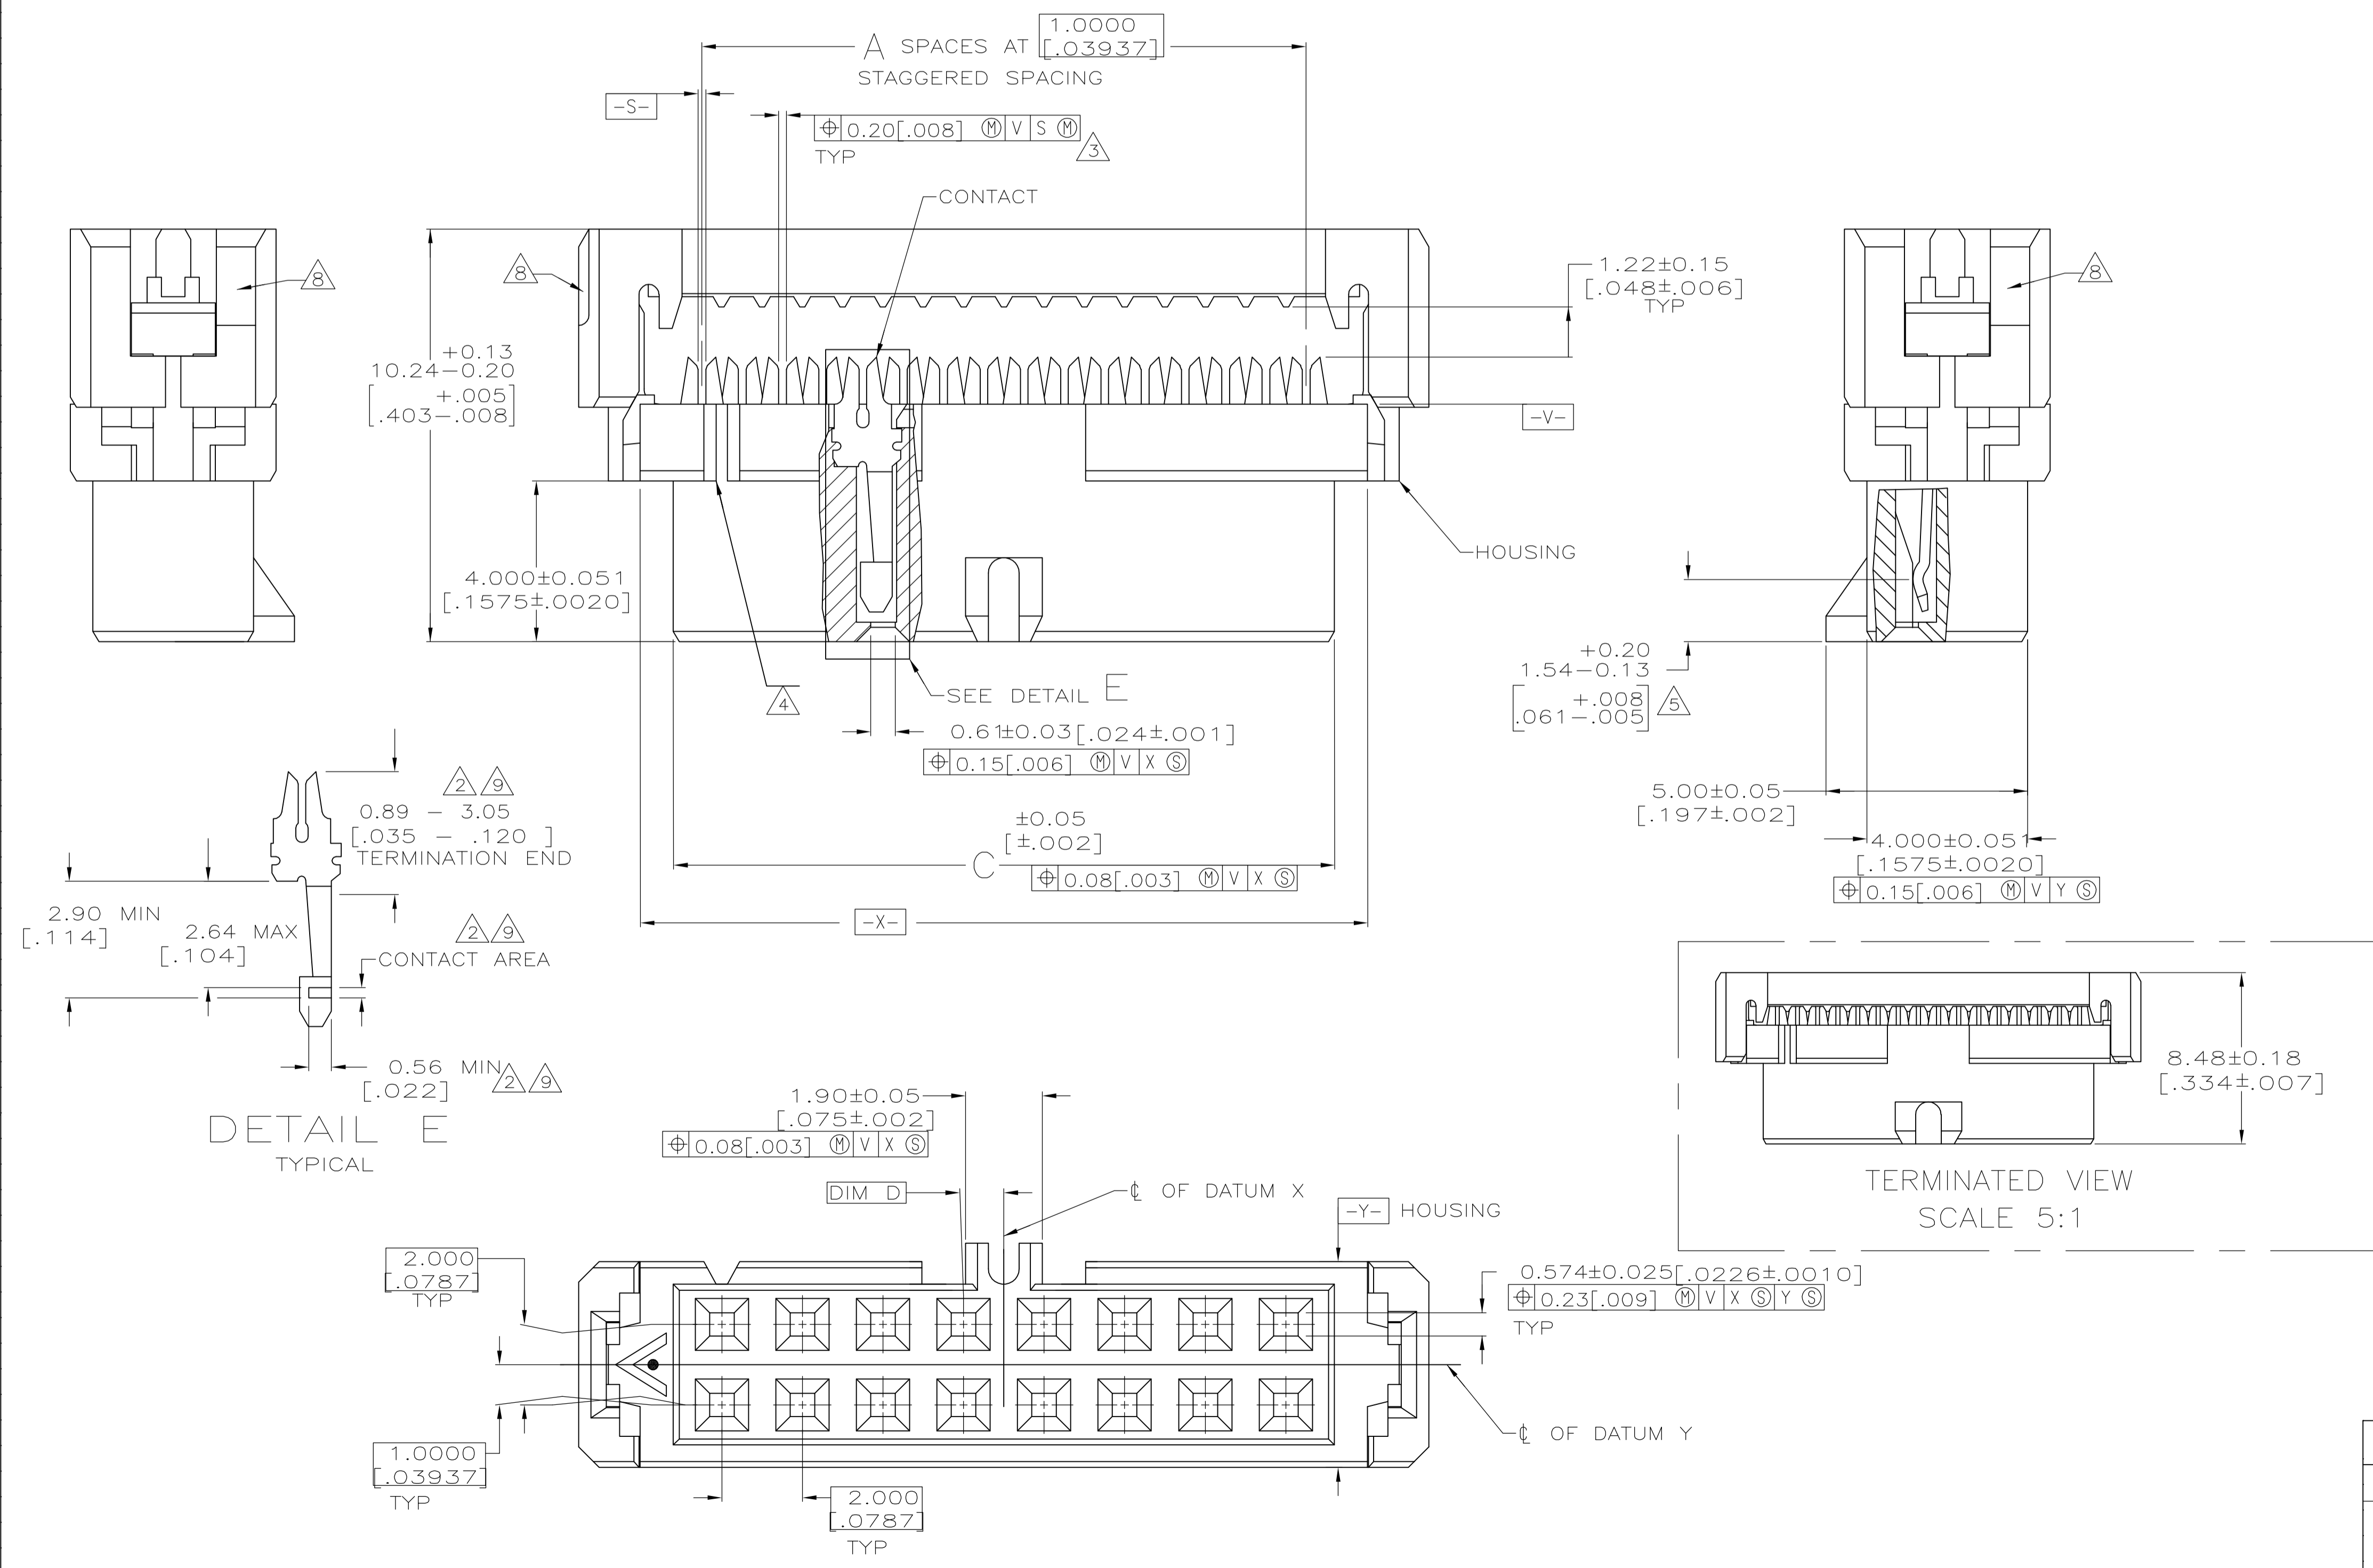

REV	DESCRIPTION	DATE	DWN	APVD			
1	1.0000 [.03937] [12.40] [17.15]	11	12	3-111623-1			
2	1.0000 [8.41] [13.18]	7	8	3-111623-0			
3	0.0000 [22.40] [27.18]	21	22	2-111623-9			
4	0.0000 [34.42] [39.17]	33	34	2-111623-8			
5	1.0000 [24.41] [29.18]	23	24	2-111623-7			
6	0.0000 [50.39] [55.17]	49	50	2-111623-6			
7	1.0000 [44.40] [49.17]	43	44	2-111623-5			
8	0.0000 [40.41] [45.19]	39	40	2-111623-4			
9	0.0000 [30.40] [35.18]	29	30	2-111623-3			
10	0.0000 [26.42] [31.17]	25	26	2-111623-2			
11	1.0000 [20.40] [25.17]	19	20	2-111623-1			
12	1.0000 [16.41] [21.18]	15	16	2-111623-0			
13	0.0000 [14.40] [19.18]	13	14	1-111623-9			
14	0.0000 [10.41] [15.16]	9	10	1-111623-8			
15	1.0000 [12.40] [17.15]	11	12	1-111623-7			
16	1.0000 [8.41] [13.18]	7	8	1-111623-6			
17	0.0000 [22.40] [27.18]	21	22	1-111623-5			
18	1.0000 [68.40] [73.18]	67	68	1-111623-4			
19	1.0000 [64.41] [69.16]	63	64	1-111623-3			
20	1.0000 [60.40] [65.18]	59	60	1-111623-2			
21	0.0000 [50.39] [55.17]	49	50	1-111623-1			
22	1.0000 [44.40] [49.17]	43	44	1-111623-0			
23	1.0000 [40.41] [45.19]	39	40	111623-9			
24	0.0000 [34.42] [39.17]	33	34	111623-8			
25	0.0000 [30.40] [35.18]	29	30	111623-7			
26	0.0000 [26.42] [31.17]	25	26	111623-6			
27	1.0000 [24.41] [29.18]	23	24	111623-5			
28	0.0000 [20.40] [25.17]	19	20	111623-4			
29	1.0000 [16.41] [21.18]	15	16	111623-3			
30	0.0000 [14.40] [19.18]	13	14	111623-2			
31	0.0000 [10.41] [15.16]	9	10	111623-1			
32	CONTACT FINISH	D	C	B	A	NO OF POSN	PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT. DIMENSIONS: mm [INCHES]. TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ±, 1 PLC ±, 2 PLC ±, 3 PLC ± 0.08 [.003], 4 PLC ±, ANGLES ±.

APVD: J. McCLINTON. PRODUCT SPEC: 108-1372. APPLICATION SPEC: 2mm CL, AMP-LATCH. SIZE: A1. WEIGHT: 00779. CUSTOMER DRAWING. SCALE: 10:1. SHEET: 1 OF 1. REV: L1.

tyco Electronics Tyco Electronics Corporation Harrisburg, PA 17105-3608