

SCALA NON IMPEGNATIVA
(DO NOT SCALE)
DIMENSIONI IN mm.
DIMENSIONS IN mm.


METRIC

PROIEZIONE EUROPEA
(EUROPEAN PROJECTION)

NOTE (NOTES)

- MATERIALI (MATERIALS):**
CONTATTO: LEGA DI RAME, NICHELATO E DORATO / STAGNATO
BLOCCHETTO: RESINA POLIESTERE CARICATA VETRO UL94 V-0
 COLORE NERO PER P/NS 281523 E 281524;
 COLORE GRIGIO PER P/N 284709
ESPULSORE: RESINA POLIAMMIDICA CARICATA VETRO UL94 V-0
 COLORE NERO PER P/NS 281523 E 281524;
 RESINA POLIESTERE CARICATA VETRO UL94 V-0
 COLORE GRIGIO PER P/N 284709
(POST): COPPER ALLOY, GOLD DUPLEX PLATED OVER NICKEL
HOUSING: GLASS FIBER FILLED PBT F.R.
 COLOUR BLACK FOR P/NS 281523 AND 281524;
 COLOUR GREY FOR P/N 284709
LATCH: GLASS FIBER FILLED POLYAMIDE F.R.
 COLOUR BLACK FOR P/NS 281523 AND 281524;
 GLASS FIBER FILLED PBT F.R.
 COLOUR GREY FOR P/N 284709
- QUESTA POLARIZZAZIONE NON E' ESISTENTE NEI CONNETTORI A 10 E 14 POSIZIONI (AT THIS SIDE OF CONNECTOR NO POLARIZATION ON 10 AND 14 POSITION VERSIONS)
- AMMESSO IMBARCAMENTO $\pm 0,25/50$ PER 60 POSIZIONI (ADMITTED WARPING $\pm 0,25/50$ FOR 60 POSITIONS)
- * P/NS OBSOLETI (OBSOLETE P/NS)

QUESTO CONNETTORE E' APPROVATO E CERTIFICATO
(THIS CONNECTOR IS APPROVED AND CERTIFIED.)

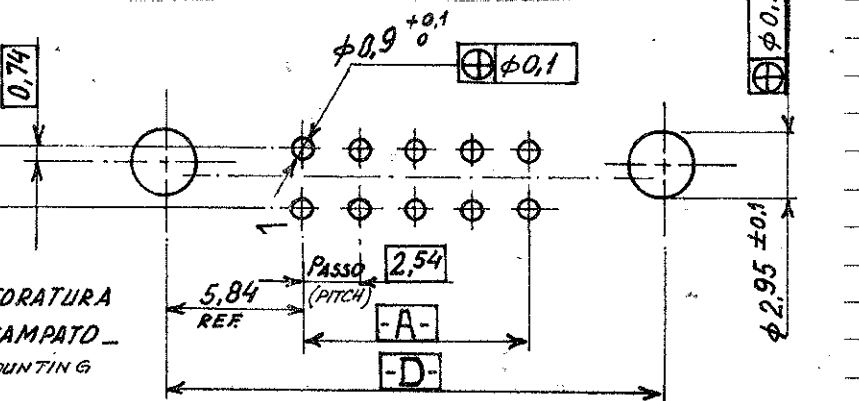

FINITURA / COLORE (FINISH / COLOUR)	MATERIALE (MATERIAL)	NUMERO (PART NUMBER)
-------------------------------------	----------------------	----------------------

CUSTOMER DWG. FOR REFERENCE ONLY **DISEGNO PER CLIENTE SOLO PER RIFERIMENTO**


THIS DRAWING IS UNPUBLISHED RELEASE FOR PUBLICATION 19
 © COPYRIGHT 1983 BY AMP INCORPORATED, HARRISBURG, PA ALL INTERNATIONAL RIGHT RESERVED AMP PRODUCTS MAY BE COVERED BY U.S. AND FOREIGN PATENT AND/OR PATENT PENDING

TOLLERANZE: SE NON DIVERSAMENTE SPECIFICATO (TOLERANCES UNLESS OTHERWISE SPECIFIED)	DIAM. ISOLANTE (INS. DIA. RANGE)	RANGO FILO (WIRE RANGE)	SCALA (SCALE)
---	----------------------------------	-------------------------	---------------

AMP AMP ITALIA S.p.A.
Corso F.lli Cervi, 15
COLLEGNO (TORINO)

DESCRIZIONE (DESCRIPTION): **AMPLATCH PIN HEADER, MIL TYPE, WITH STAMPED/ROUNDED POST - 2,54 x 2,54 GRID - (RIGHT ANGLE VERS. WITH LATCH 14,55)**

LOC. SIZE: IA3 NUMERO (DWG NO): 281523-... REV. (REV.): F FOGLIO (SHEET) DI 1 (OF) 1

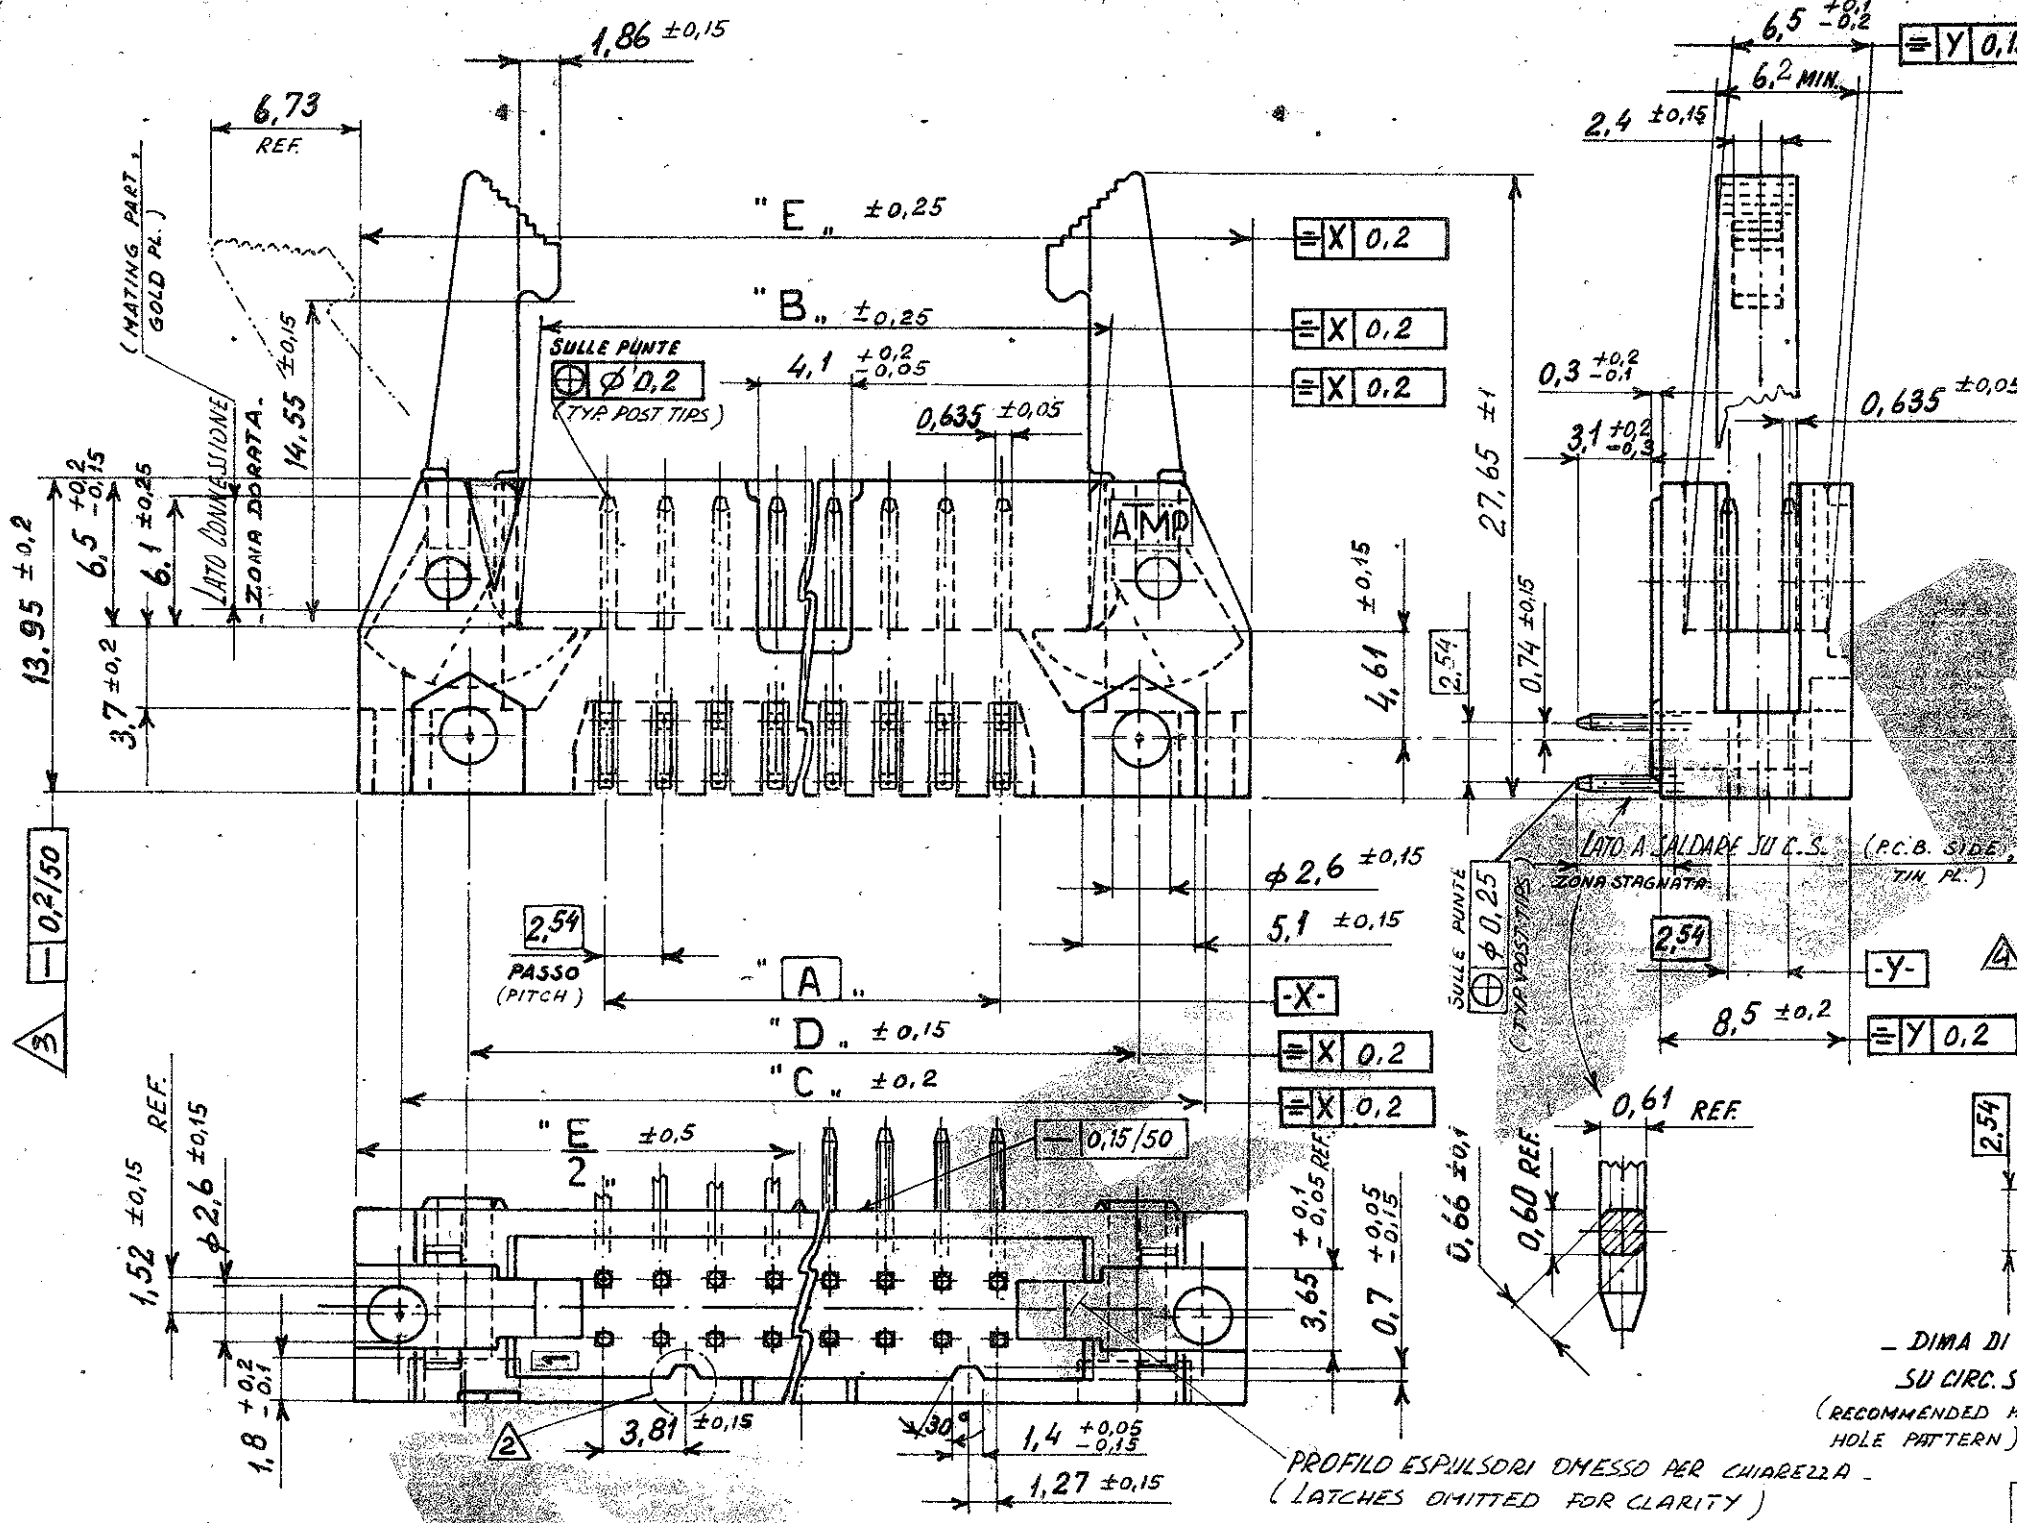

60	73,66	81,28	91,44	85,34	95,50	6-	-0	6-	-0	6-	-0*
50	60,96	68,58	78,74	72,64	82,80	5-	-0	5-	-0	5-	-0*
44	53,34	60,96	71,12	65,02	75,18	4-	-4	4-	-4*	4-	-4
40	48,26	55,88	66,04	59,94	70,10	4-	-0	4-	-0	4-	-0*
34	40,64	48,26	58,42	52,32	62,48	3-	-4	3-	-4	3-	-4*
26	30,48	38,10	48,26	42,16	52,32	2-	-6	2-	-6	2-	-6*
20	22,86	30,48	40,64	34,54	44,70	2-	-0	2-	-0	2-	-0*
16	17,78	25,40	35,56	29,46	39,62	1-	-6	1-	-6	1-	-6
14	15,24	22,86	33,02	26,92	37,08	1-	-4	1-	-4	1-	-4
10	10,16	17,78	27,94	21,84	32,00	1-284709-0		1-281523-0		1-281524-0*	
No. OF POS.	A	B	C	D	E	CONN. P/N (0,2mm Au DUPLEX) COL. GRIGIO		CONN. P/N (0,2mm Au DUPLEX) COL. NERO		CONN. P/N (0,76mm Au DUPLEX) COL. NERO	

DISTRIBUZIONE (PRINT DIST.)