

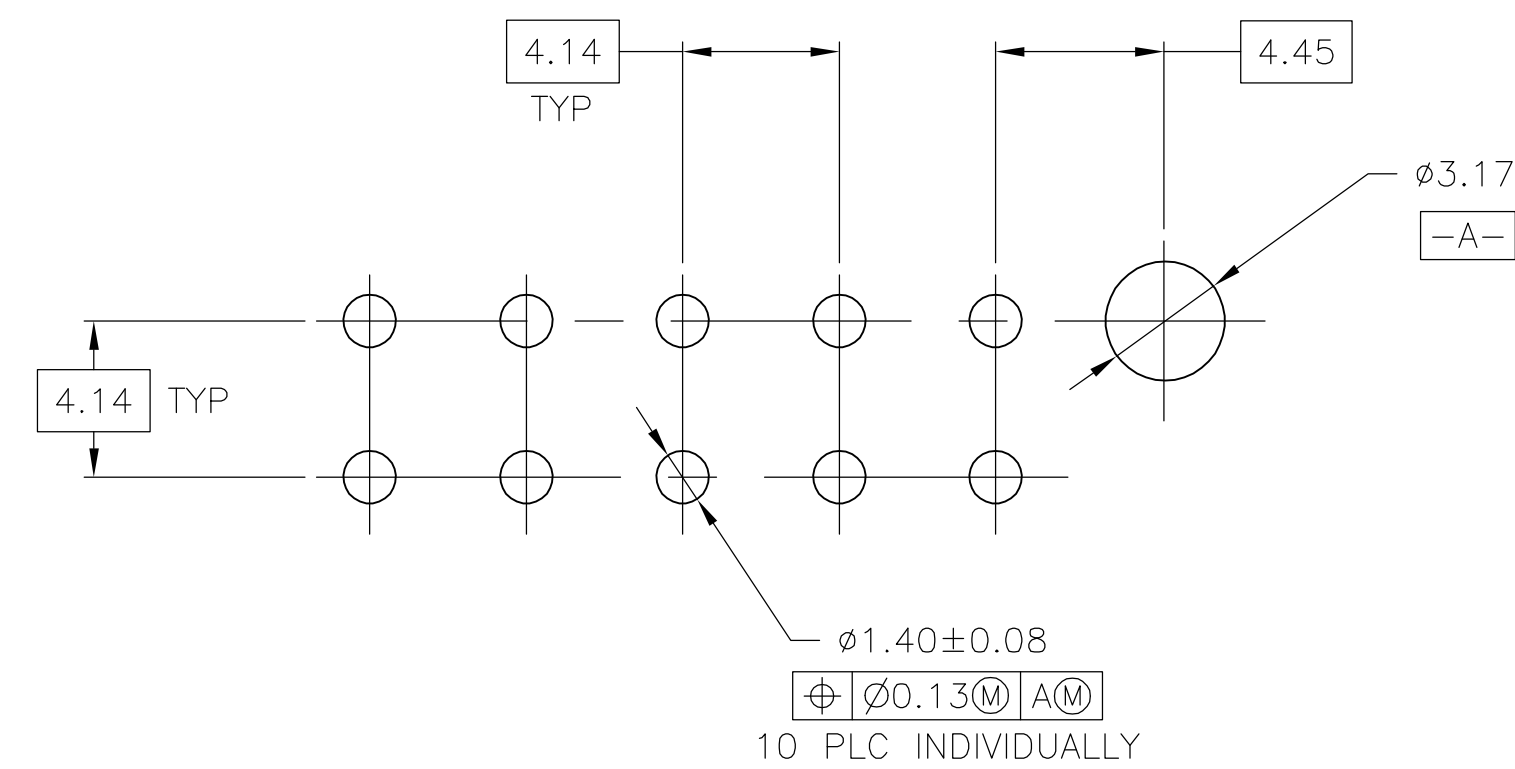
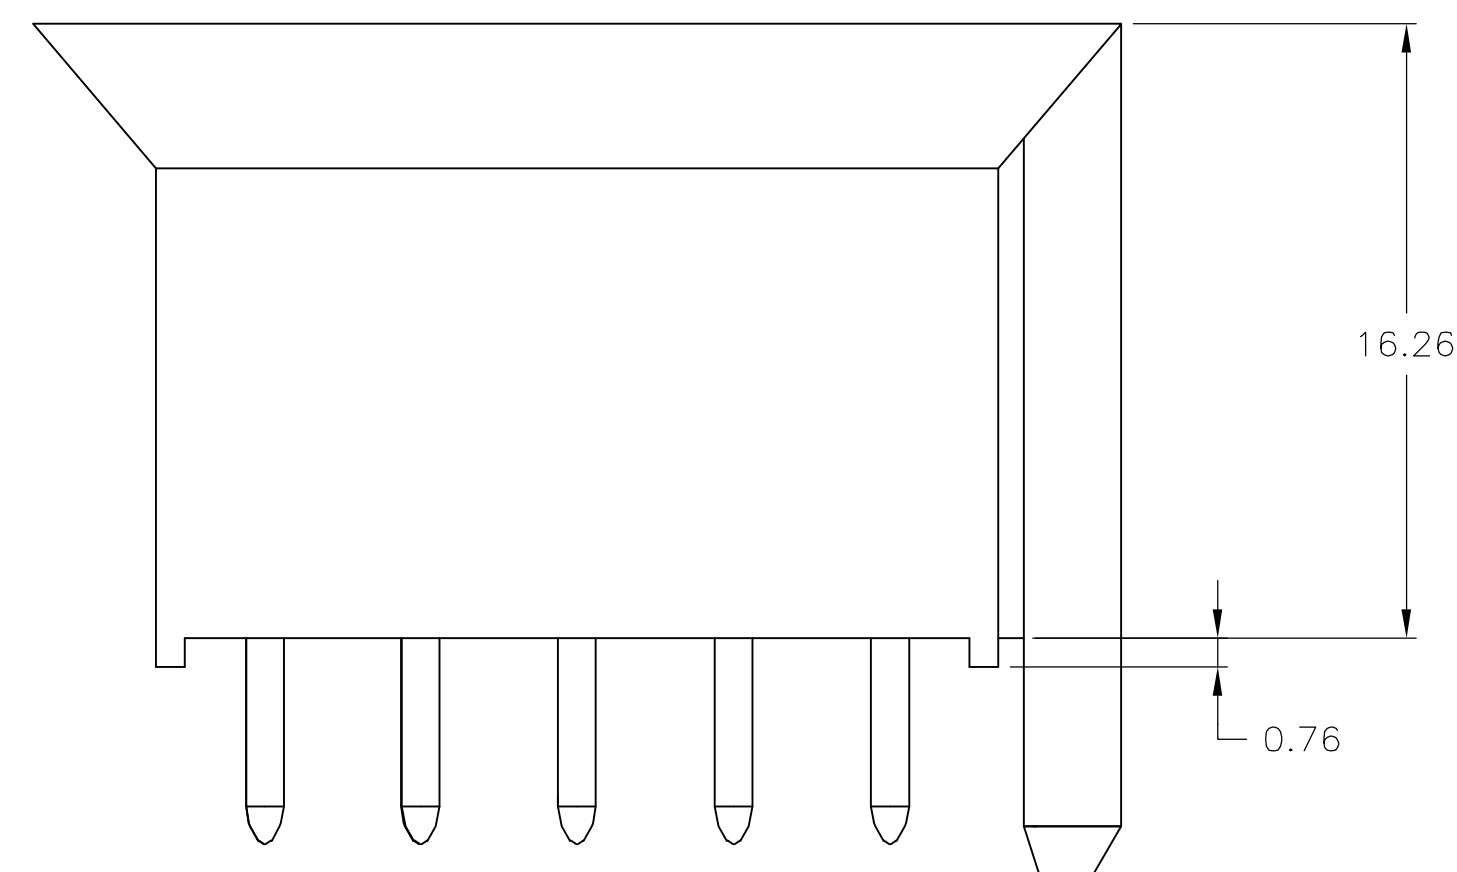
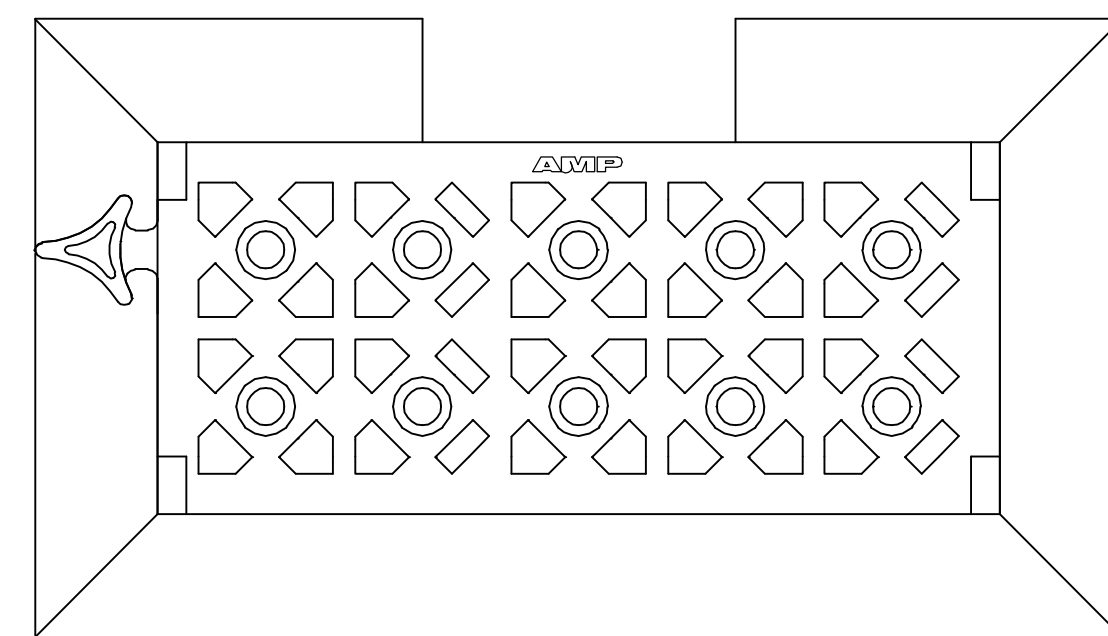
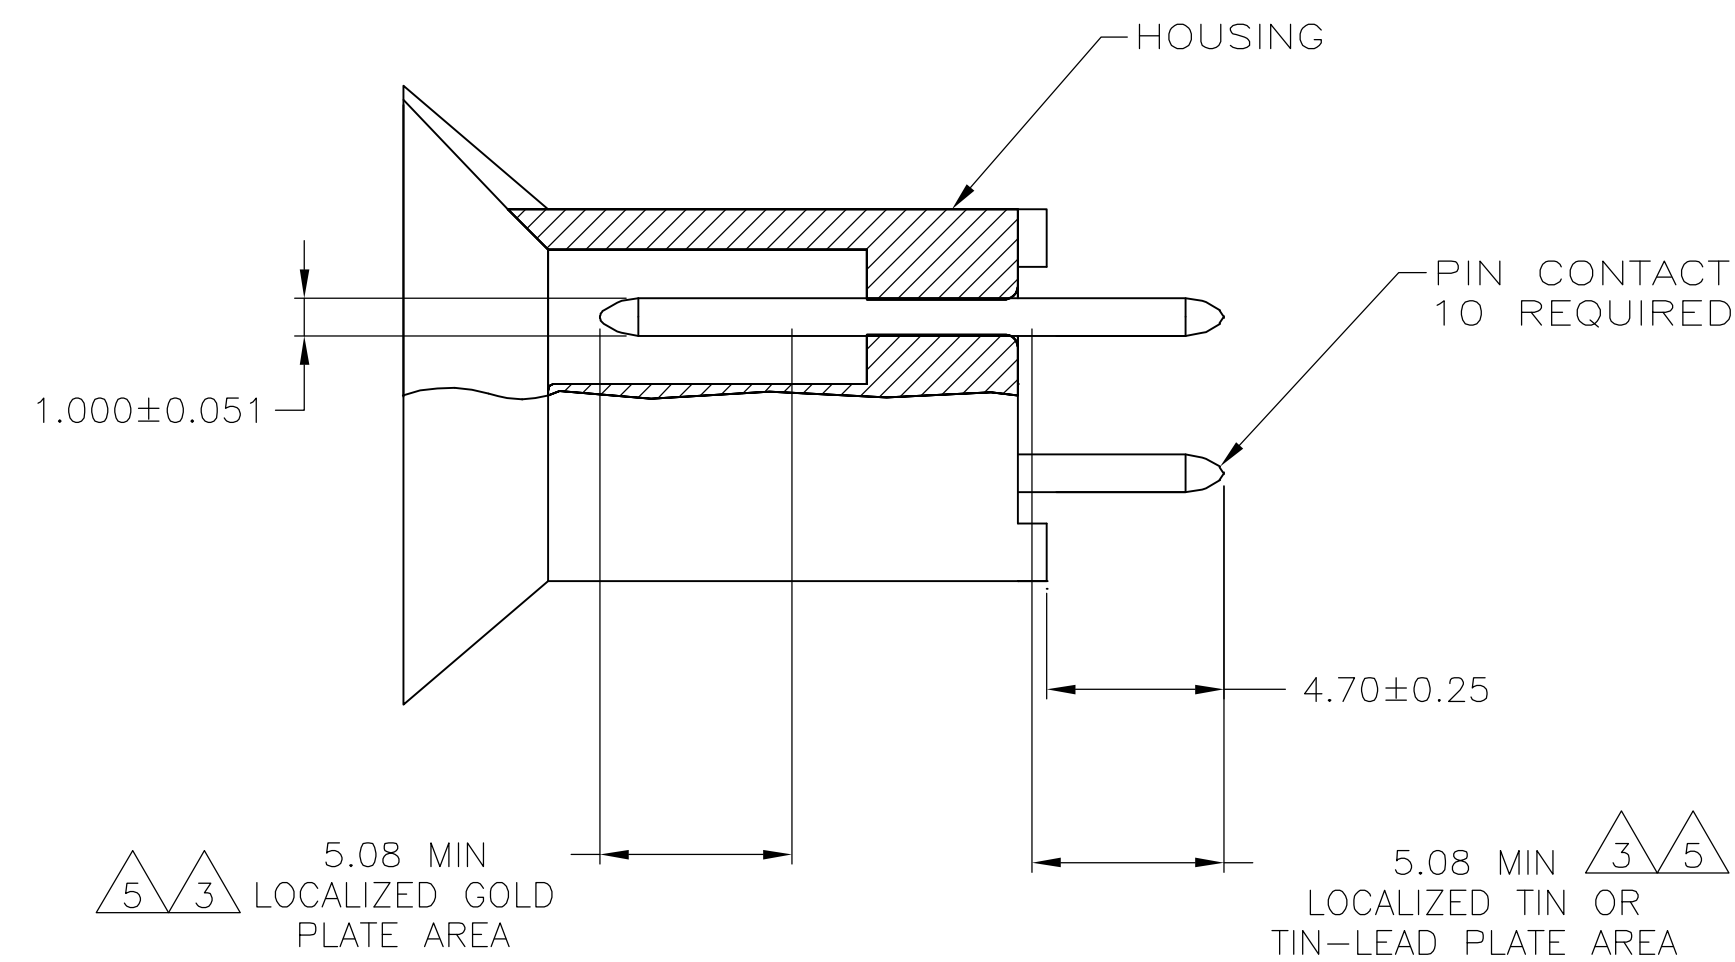
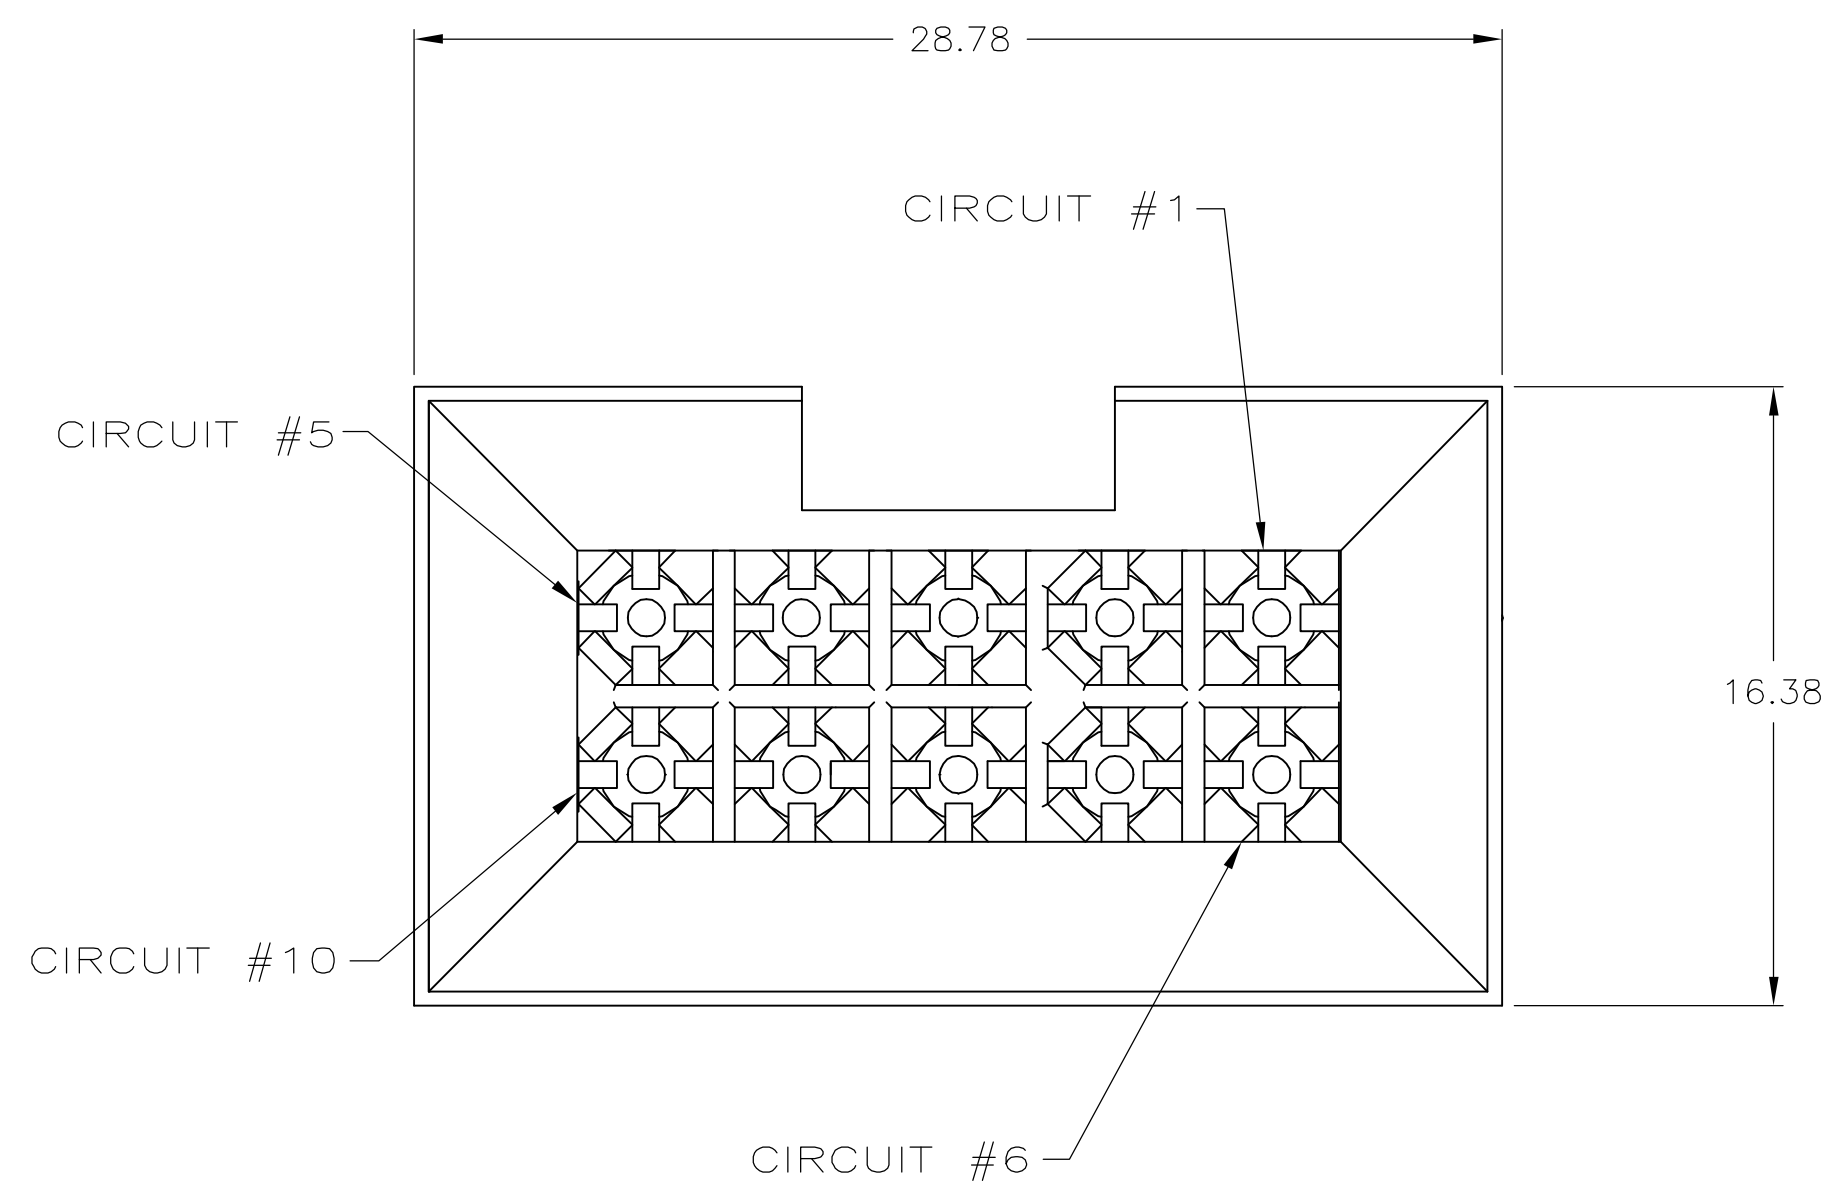


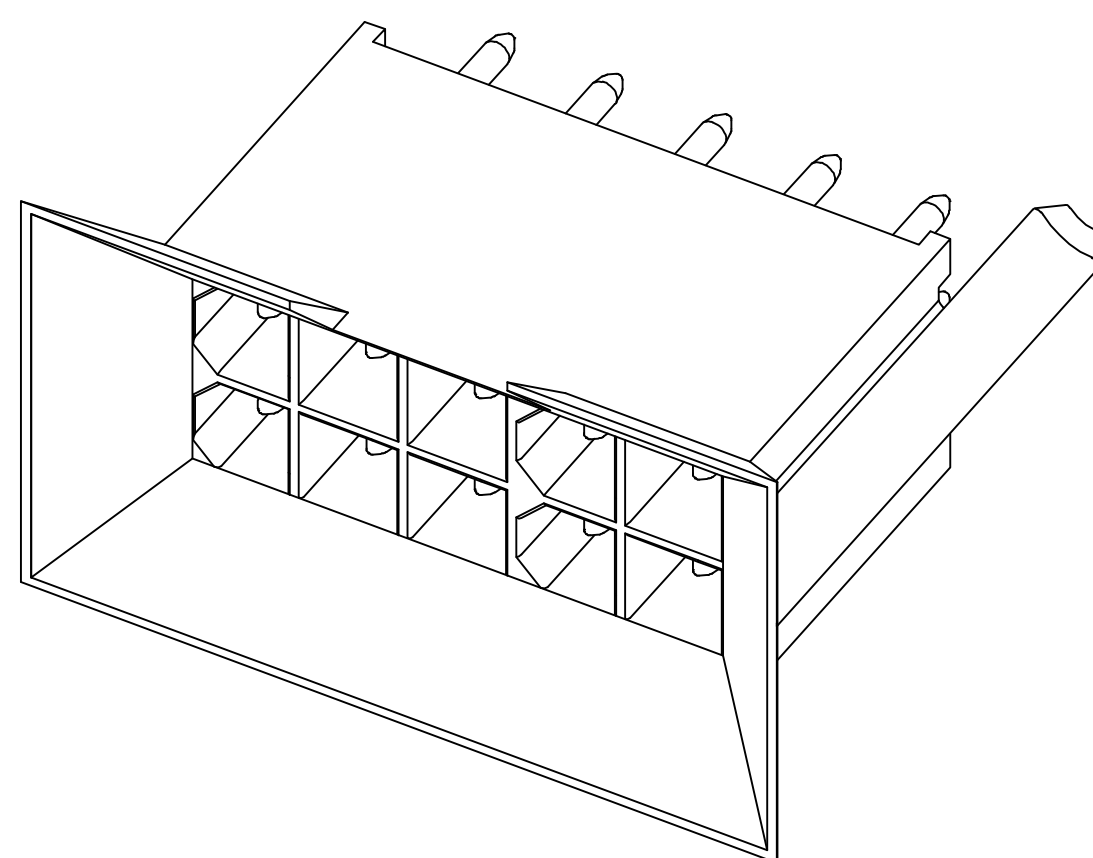

RECOMMENDED MOUNTING HOLE PATTERN
FOR 1.57 THICK P.C. BOARD

1.40	.055	—	—
1.000	.0394	28.78	1.133
0.76	.030	16.38	.645
0.25	.010	16.26	.640
0.13	.005	5.08	.200
0.08	.003	4.70	.185
0.051	.0020	4.45	.175
0.00381	0.000150	4.14	.163
0.00127	.000050	3.17	.125
0.00076	.000030	1.57	.062
MM	IN	MM	IN

CONVERSION TABLE

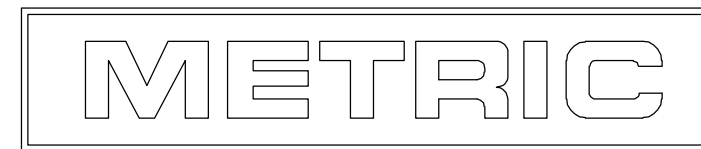

BRASS, GOLD 	NYLON, 94V-0, WHITE	1-794328-1
BRASS, TIN 	NYLON, 94V-0, WHITE	1-794328-0
BRASS, GOLD 	NYLON, 94V-0, WHITE	794328-2
BRASS, TIN LEAD 	NYLON, 94V-0, WHITE	794328-1
PIN CONTACT MATERIAL AND FINISH	HOUSING MATERIAL AND COLOR	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DIN K. WHITAKER	10APR97	tyco <i>Electronics</i>	Tyco Electronics Corporation Harrisburg, PA 17105-3608	
DIMENSIONS:		OK R. SWING	10APR97			
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD R. ORSTAD	10APR97	NAME	HEADER ASSEMBLY, BLIND MATE, 10 CIRCUIT, MINI-UNIVERSAL MATE-N-LOK(TM)	
mm		PRODUCT SPEC		SIZE	CAGE CODE	DRAWING NO
		APPLICATION SPEC		A1	00779	C-794328
MATERIAL		WEIGHT	—	RESTRICTED TO		—
FINISH				SCALE		5:1
SEE TABLE		CUSTOMER DRAWING		SHEET		1 OF 1
				REV		C