

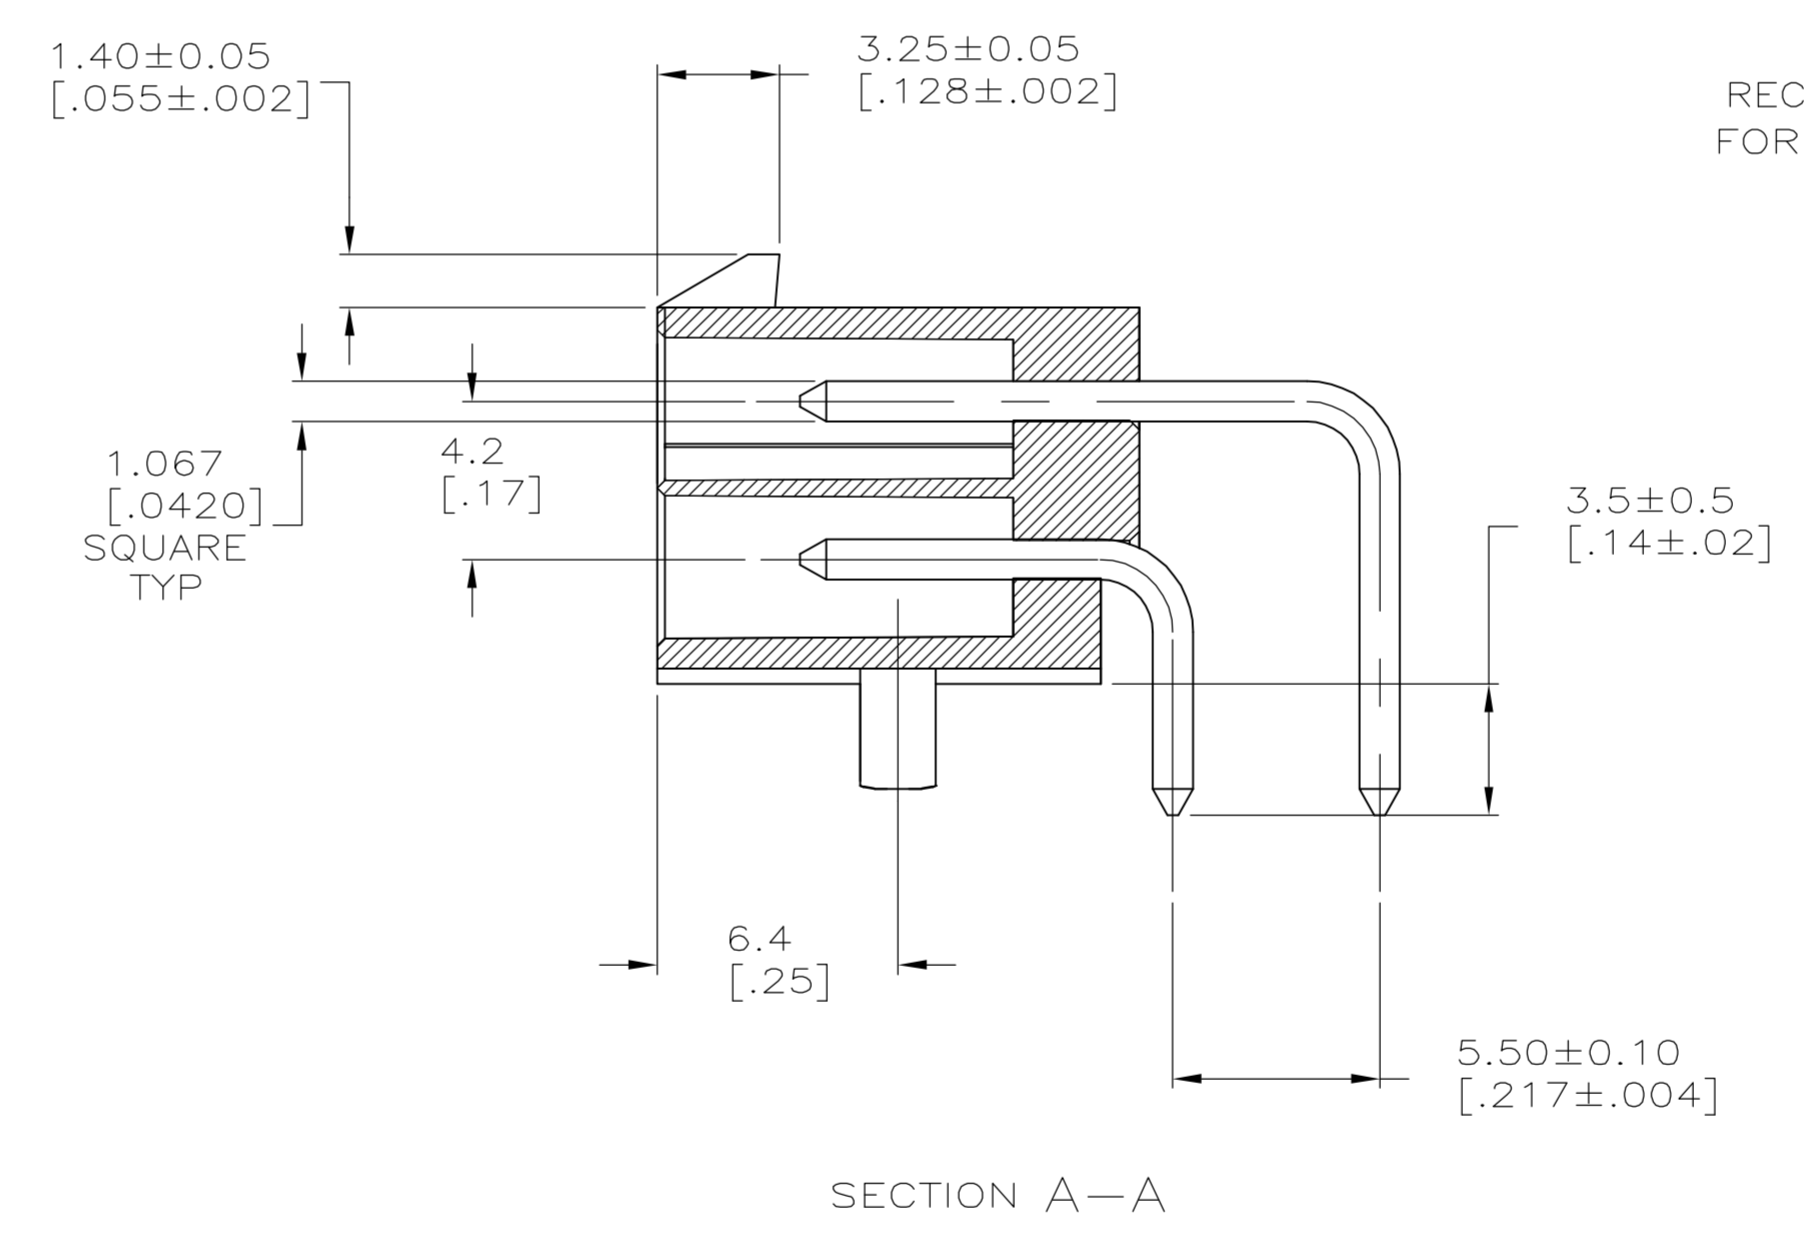
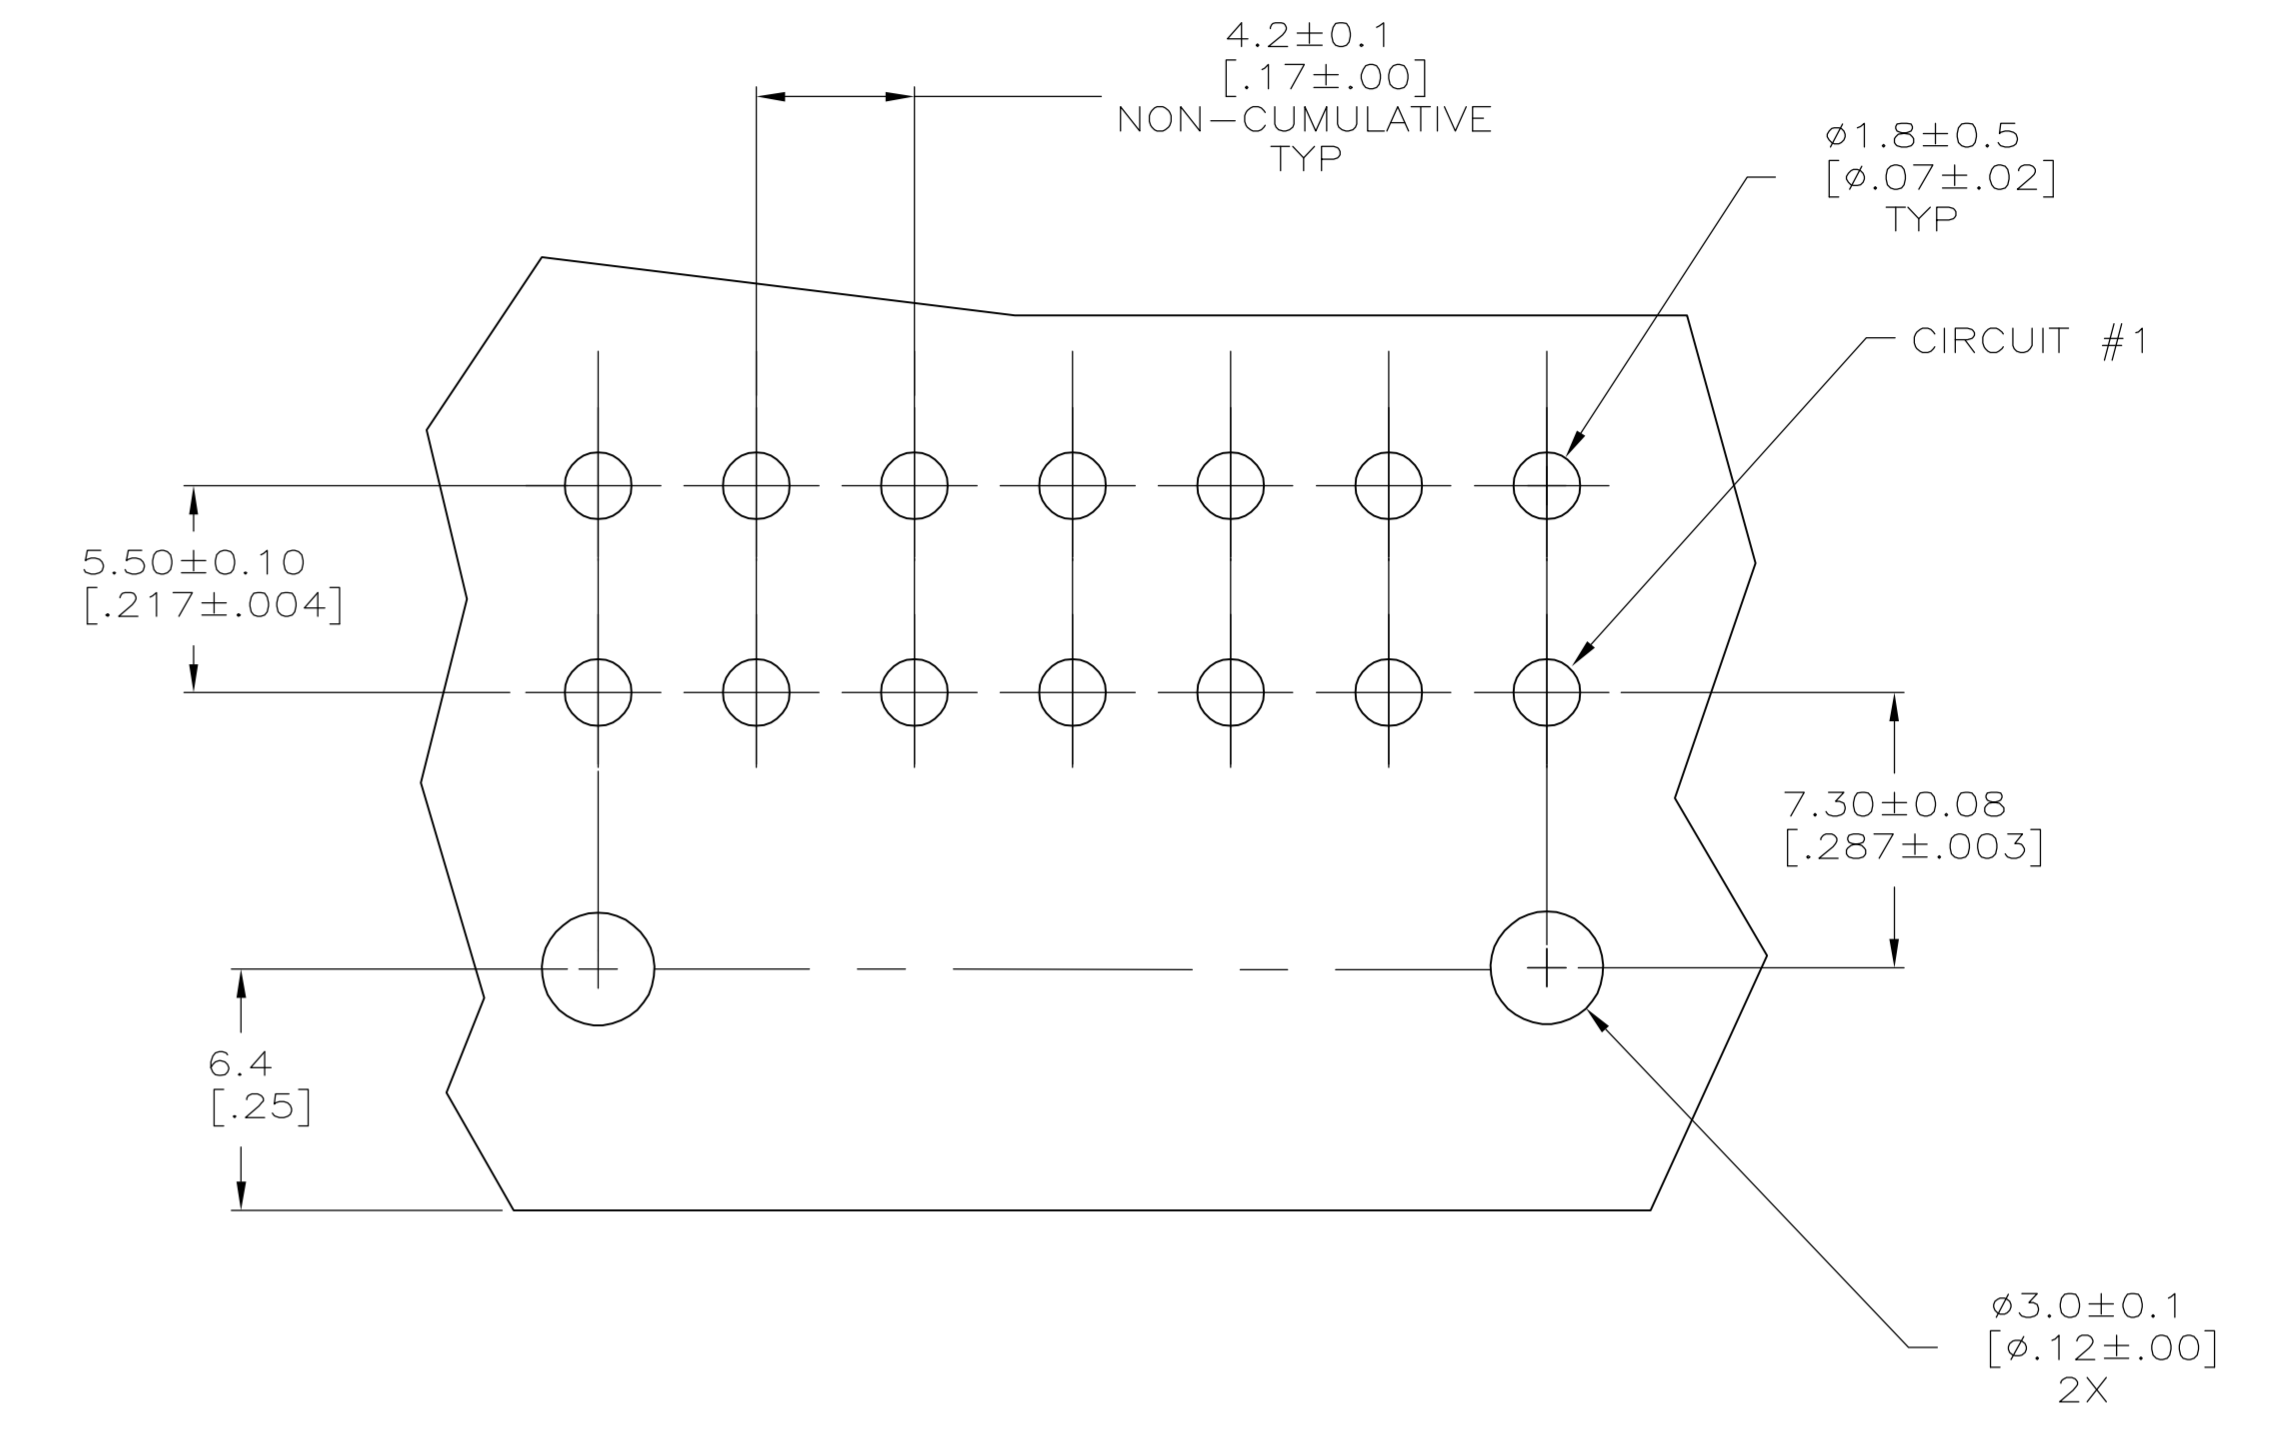


LOC		DIST		REVISIONS			
P	LTR	DESCRIPTION	DATE	OWN	APVD		
D		REVISED PER ECO-06-014772	13NOV06	KW	DC		

- 1 MATERIAL: HOUSING - NYLON, UL94V-0 (COLOR - WHITE).  
PIN - 1.067mm<sup>2</sup> [.0017in<sup>2</sup>] COPPER ALLOY.
- 2 PINS TO COMPLY WITH SOLDERABILITY SPEC 109-11-3.
- 3 0.00381 [.000150] MINIMUM TIN LEAD OVER 0.00127 [.000050] MINIMUM NICKEL, ENTIRE LENGTH OF PIN.
- 4 NOTE DELETED.
- 5 0.00381 [.000150] MINIMUM TIN OVER 0.00127 [.000050] MINIMUM NICKEL, ENTIRE LENGTH OF PIN.

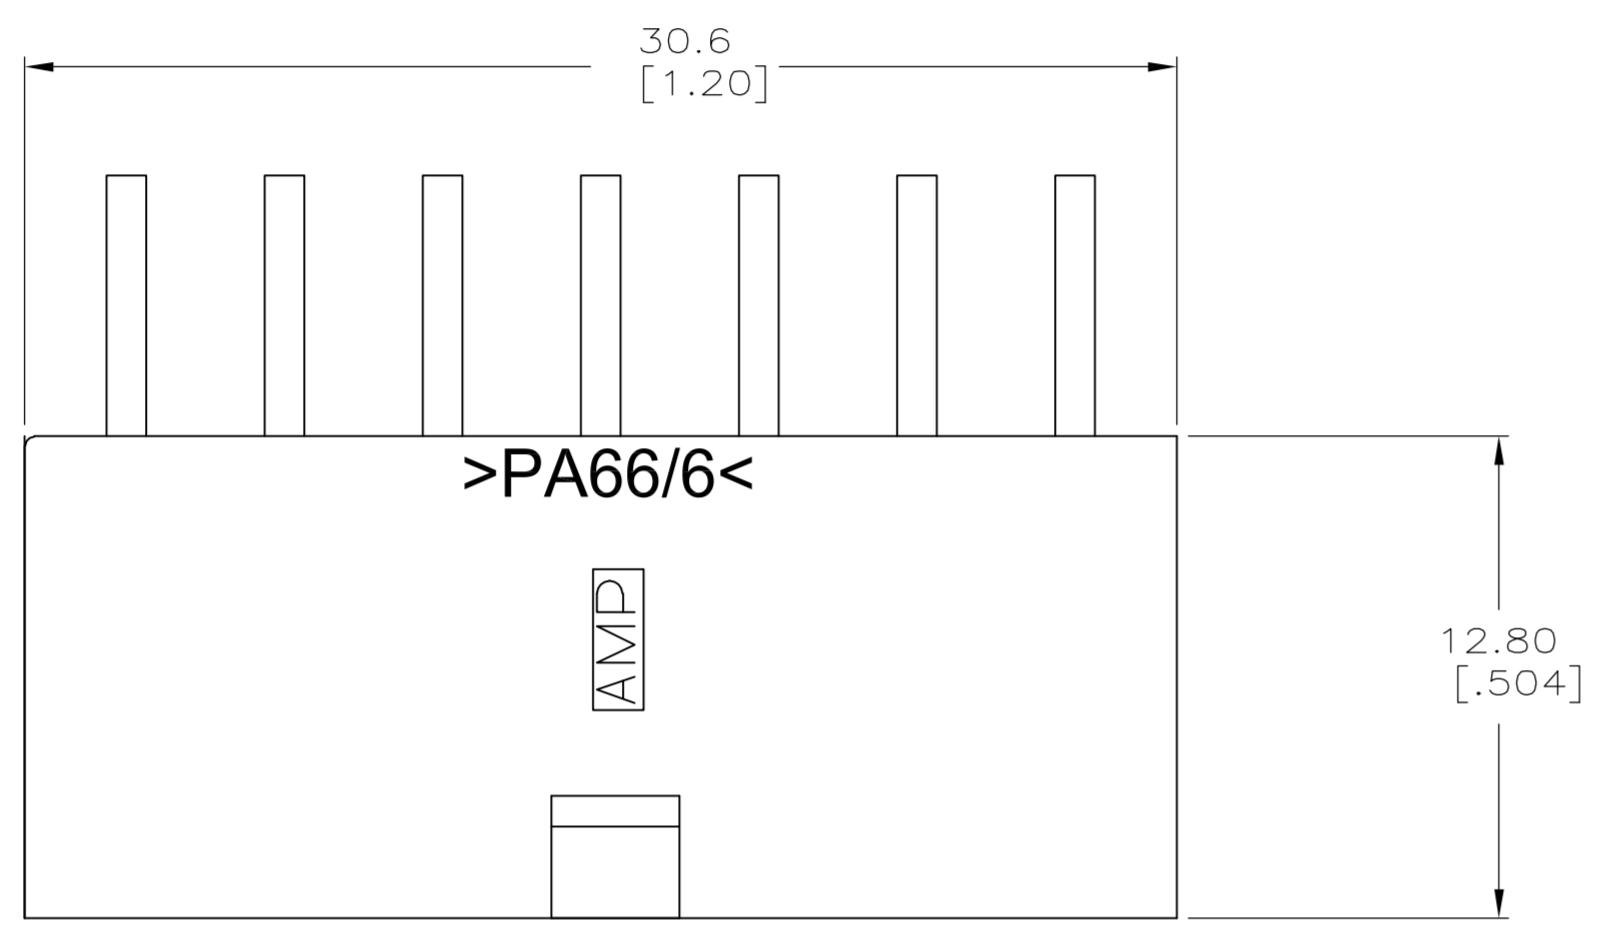

RECOMMENDED MOUNTING HOLE PATTERN FOR 1.78 [.070] MAX THICK P.C. BOARD COMPONENT SIDE SHOWN

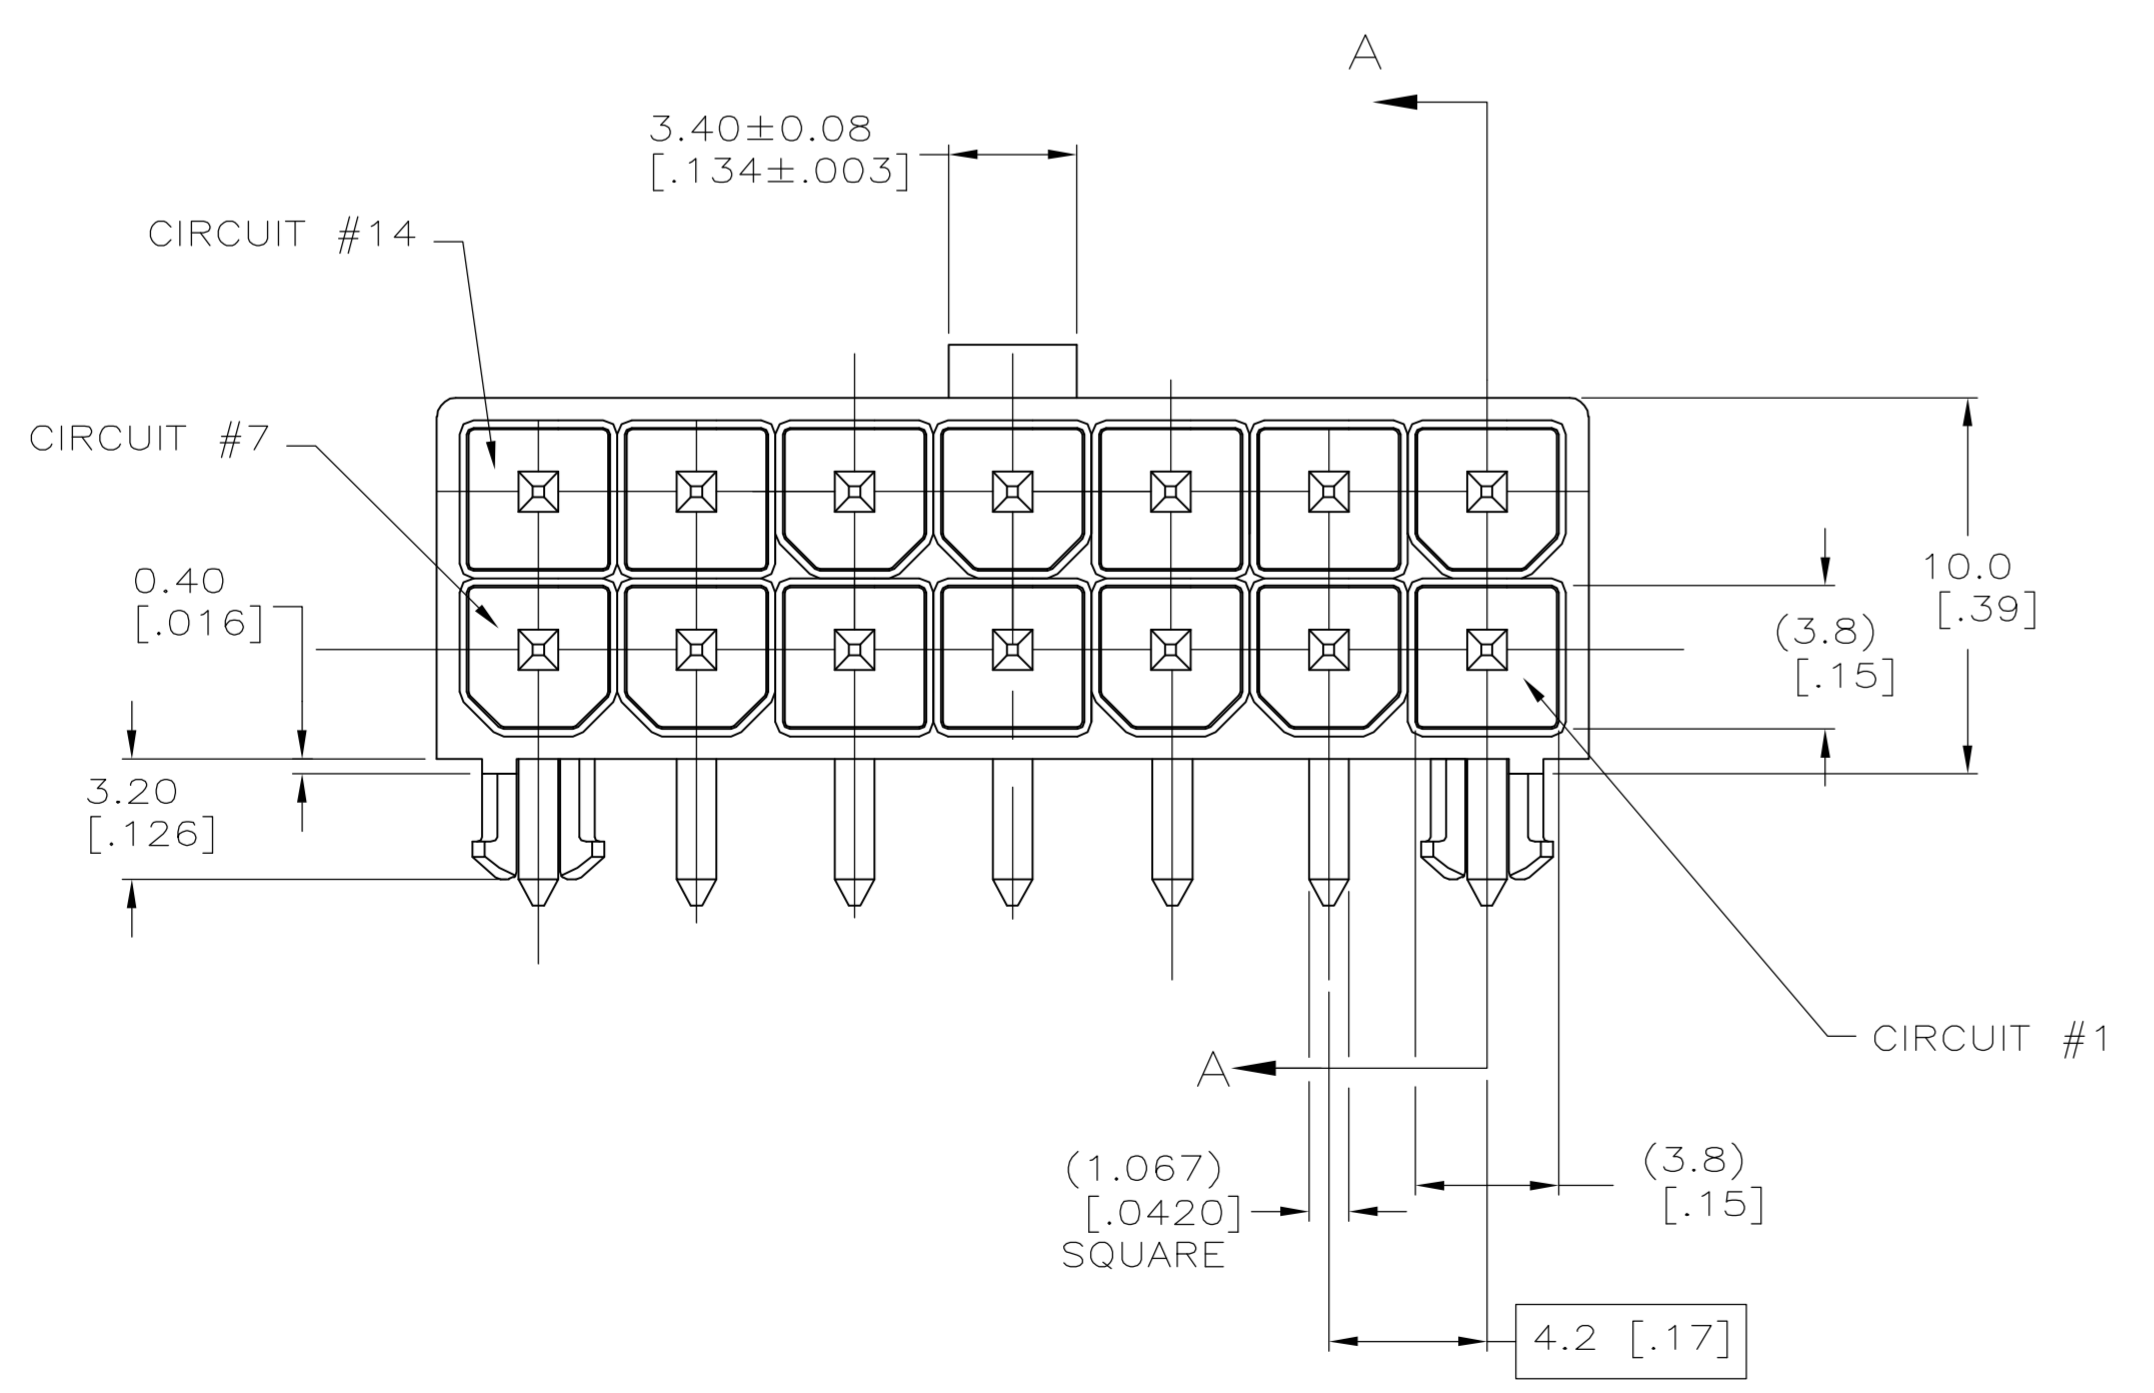

SUPERSEDED BY 1-794532-1

1	5	1	1	1-794532-1
1	3	1	1	794532-1
MATERIAL		FINISH		ASSEMBLY
PIN		HOUSING		

**METRIC**

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:	mm [INCHES]	TOLERANCES UNLESS OTHERWISE SPECIFIED:	0 PLC ± .02 [0.1]	1 PLC ± .02 [0.1]	2 PLC ± .013 [0.05]	3 PLC ± .013 [0.05]	4 PLC ± .013 [0.05]	ANGLES: ± 0° 30'	FINISH: SEE CHART	MATERIAL: SEE CHART
-------------	-------------	--	-------------------	-------------------	---------------------	---------------------	---------------------	------------------	-------------------	---------------------

APVD	D. COLEY	DATE	02-MAR-2005	NAME	D. COLEY
PRODUCT SPEC	108-1646	APPLICATION SPEC	114-6067	SIZE	A1
SCALE	5:1	SHEET	1 OF 1	REV	D

**tyco** Electronics Corporation  
 Harrisburg, Pa 17105-3608

ASSEMBLY, HEADER, RIGHT ANGLE, 14 POSITION, W/PEGS, 94V-0, AMP-DUAC(TM) POWER CONNECTOR

CUSTOMER DRAWING