



LOC		DIST		REV		REVISIONS		DATE	APPD
AD	39	P	F	ZONE	LTR	DESCRIPTION			
				J		REV PER 063C-0432-02	18OCT02	JG	
				K		REV PER EC 063C-0495-03	09MAR04	JG	

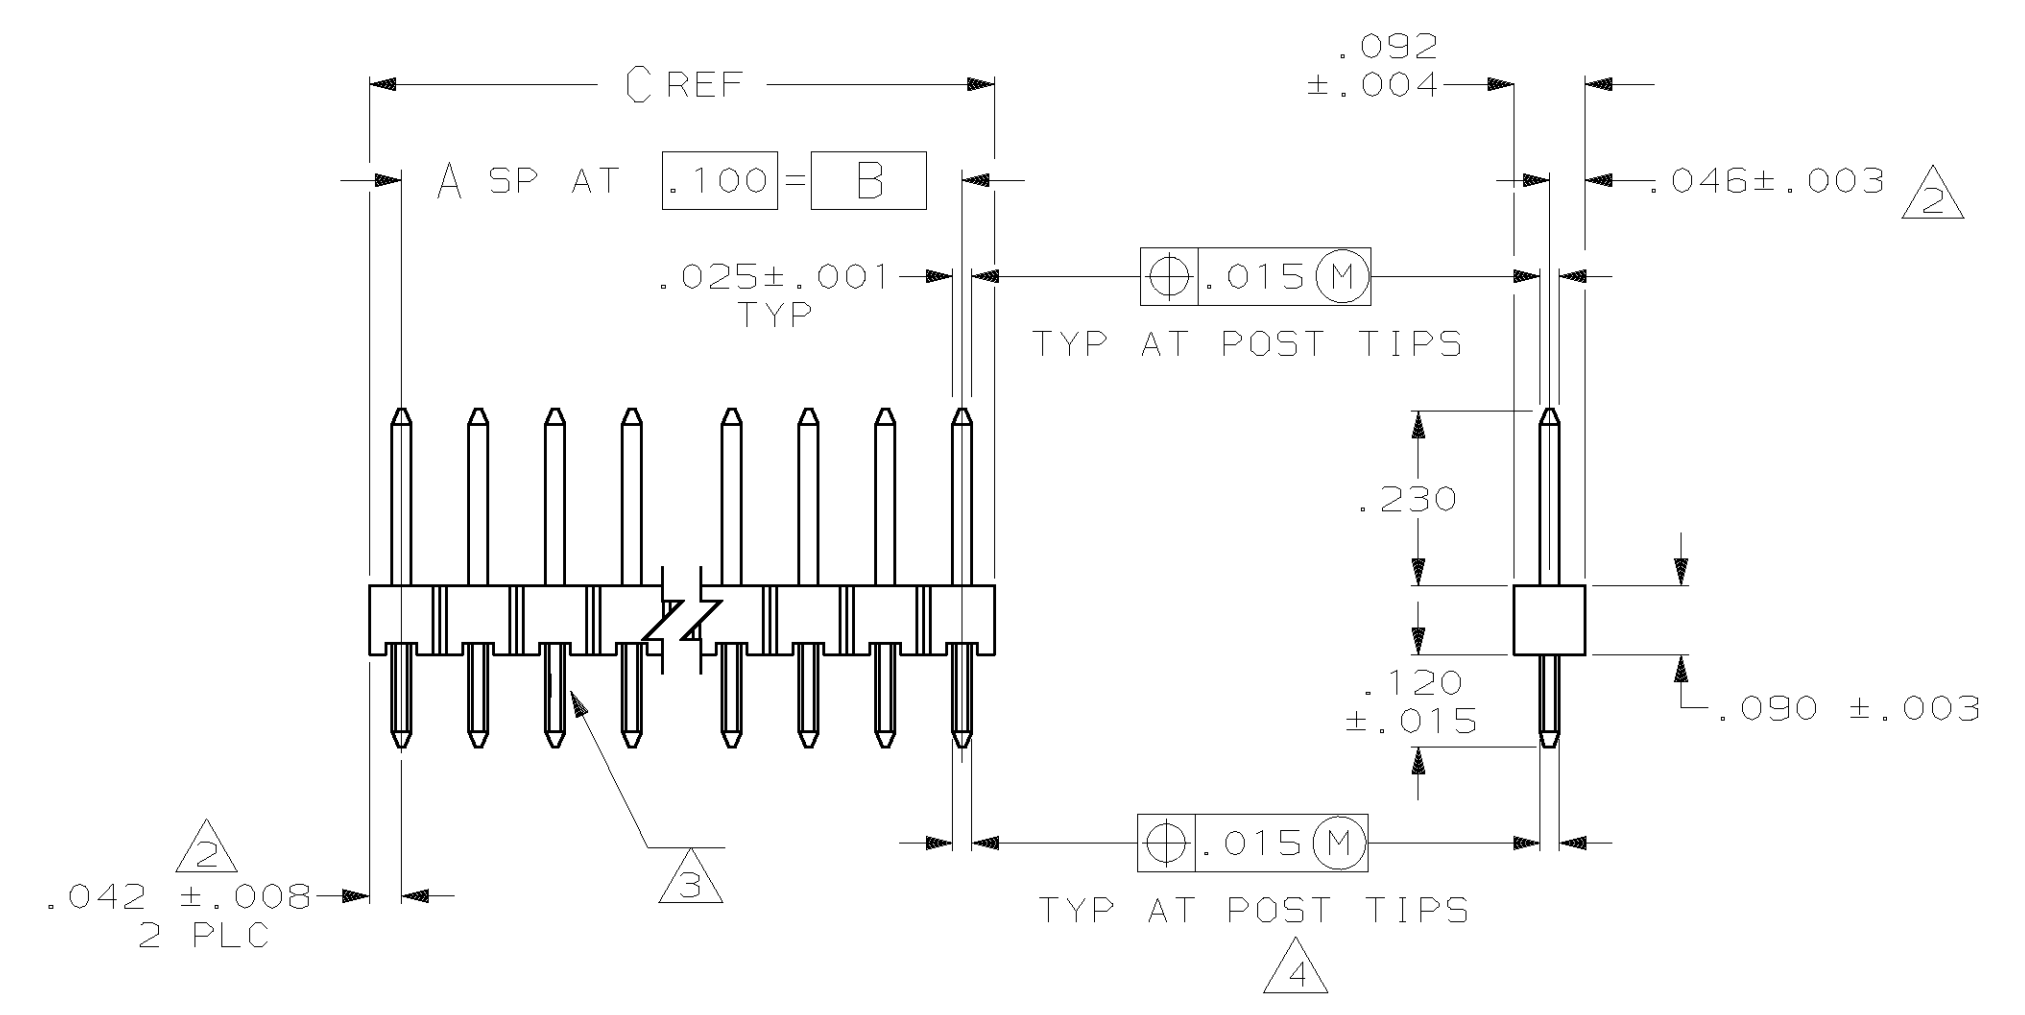

- TRUE POSITION TOLERANCE OF THE POST TIPS APPLIES WHEN THE HEADERS ARE HELD FLAT AGAINST THE PRINTED CIRCUIT BOARD.
- THE NOTED DIMENSIONS APPLY AT THE INTERSECTION OF THE POST AND THE HOUSING.
- RETENTION FEATURES ON SOLDER TAILS, LOCATED AT MANUFACTURERS OPTION.
- Ø .020 (M) FOR KINKED TAILS.

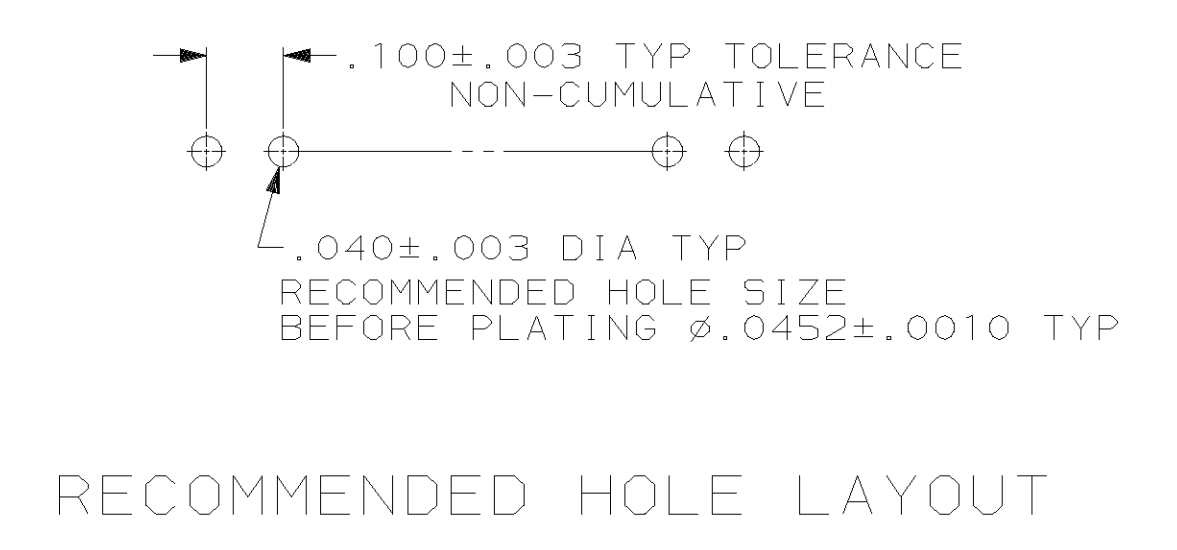

3.984	3.900	39	40	2-104346-7
3.484	3.400	34	35	2-104346-6
2.984	2.900	29	30	2-104346-5
2.584	2.500	25	26	2-104346-4
2.484	2.400	24	25	2-104346-3
2.384	2.300	23	24	2-104346-2
2.284	2.200	22	23	2-104346-1
2.184	2.100	21	22	2-104346-0
2.084	2.000	20	21	1-104346-9
1.984	1.900	19	20	1-104346-8
1.884	1.800	18	19	1-104346-7
1.784	1.700	17	18	1-104346-6
1.684	1.600	16	17	1-104346-5
1.584	1.500	15	16	1-104346-4
1.484	1.400	14	15	1-104346-3
1.384	1.300	13	14	1-104346-2
1.284	1.200	12	13	1-104346-1
1.184	1.100	11	12	1-104346-0
1.084	1.000	10	11	104346-9
.984	.900	9	10	104346-8
.884	.800	8	9	104346-7
.784	.700	7	8	104346-6
.684	.600	6	7	104346-5
.584	.500	5	6	104346-4
.484	.400	4	5	104346-3
.384	.300	3	4	104346-2
.284	.200	2	3	104346-1
C	B	A	NO OF POSN	ASSEMBLY PART NUMBER

DO NOT SCALE PRINT. UNLESS SPECIFIED DIMENSIONS IN INCHES TOLERANCES ON:		DR 2-8-88 H MOLL		AMP INCORPORATED Harrisburg, Pa. 17105	
2 PLC DEC ± .005		CHK 2-8-88 R. FEIDT			
3 PLC DEC ± .005		APPD 2-8-88 R. FEIDT		NAME	
ANGLES ± -		APPD 2-8-88 R. ELICKER		HEADER ASSY, MOD 11, BREAKAWAY, SINGLE ROW, .100 CL, VERT, .025 SQ POSTS, WITH RETENTION FEATURE	
MATERIAL HOUSING: FLAME RETARDANT THERMOPLASTIC COLOR-BLACK		PRODUCT SPEC			
POSTS: PHOSPHOR BRONZE FINISH POSTS: .000100-.000200 MATTE TIN-LEAD, ALL OVER .000050 NICKEL		APPLICATION SPEC		SIZE FSCM NO DRAWING NO	
		WEIGHT		D 00779 104346	
				SCALE 4:1 SHEET 1 OF 1	