
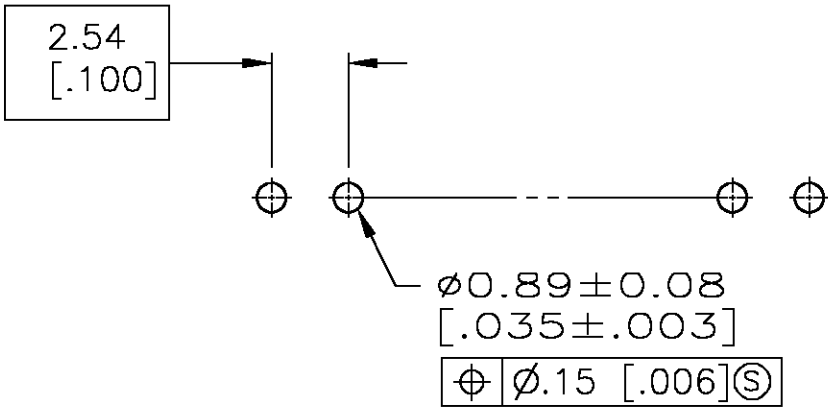


LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
AD	00	G	EC	OG3C 0826 04	16FEB05	BSV	JLG

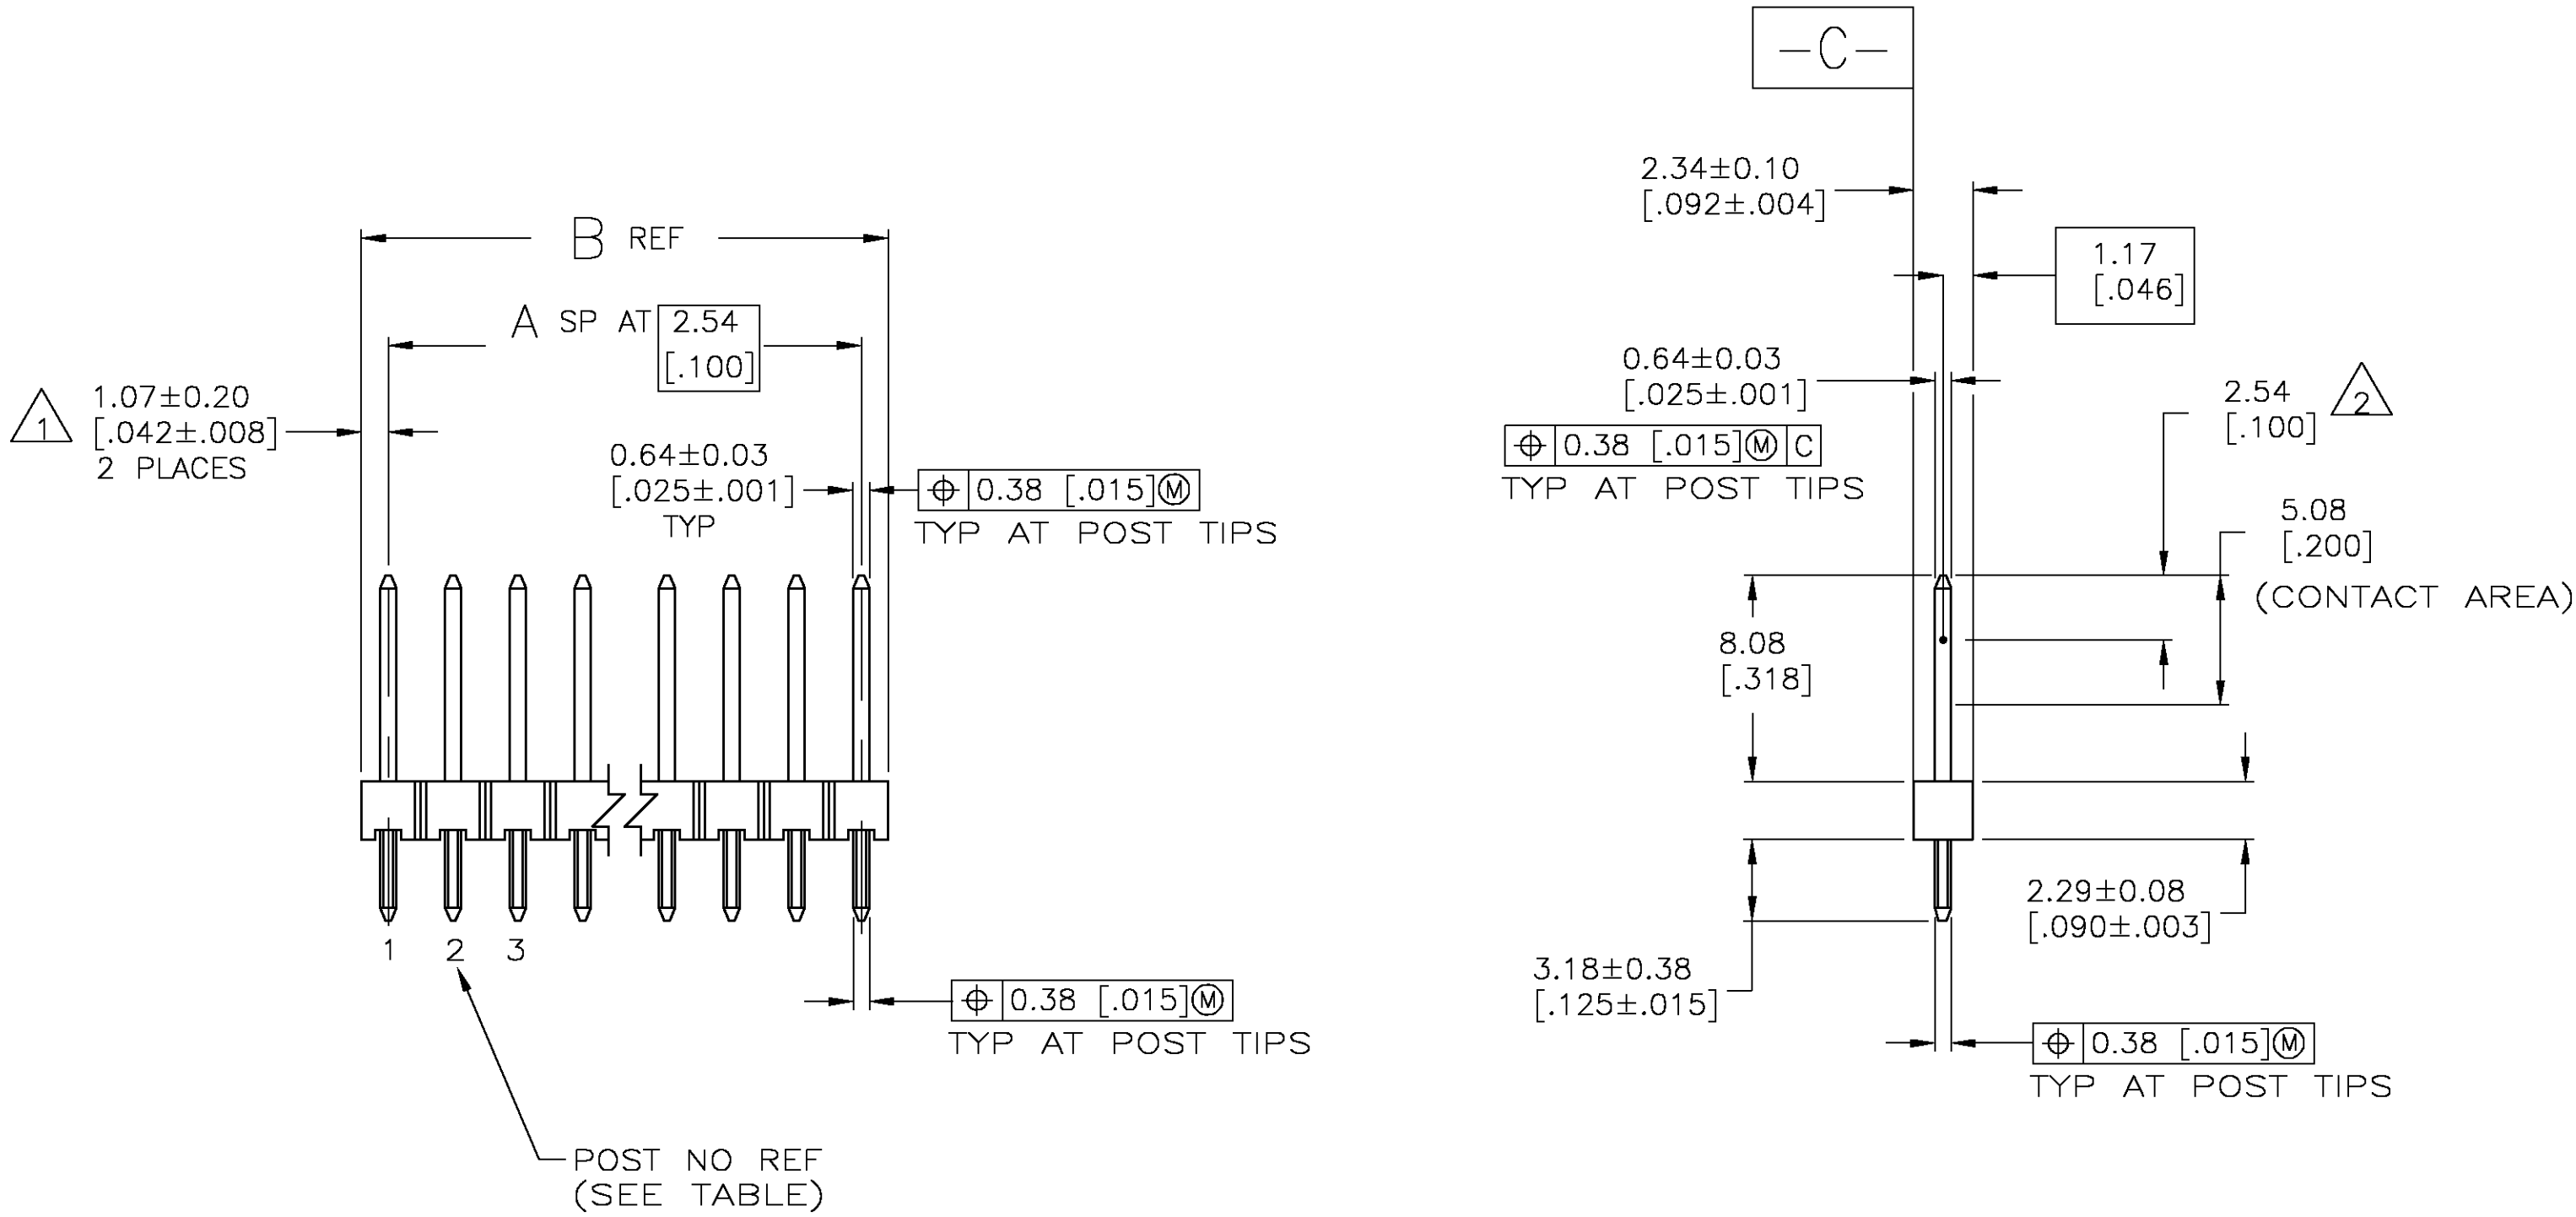

RECOMMENDED HOLE LAYOUT
FOR MANUAL INSERTION

- 1

THE NOTED DIMENSIONS APPLY AT THE INTERSECTION OF THE POST AND THE HOUSING
- 2

POINT OF MEASUREMENT FOR PLATING THICKNESS
- 3

0.000762[.000030] GOLD IN CONTACT AREA, .00254[.000100]--.00508[.000200] MATTE TIN--LEAD ON SOLDER AREA, ALL OVER 0.00127[.000050] NICKEL
- 4

HOUSING: FLAME RETARDANT THERMOPLASTIC, COLOR: BLACK
POSTS: PHOSPHOR BRONZE
- 5

0.000762[.000030] GOLD IN CONTACT AREA, .00254[.000100]--.00508[.000200] MATTE TIN ON SOLDER AREA, ALL OVER 0.00127[.000050] NICKEL
- 6

HIGH TEMPERATURE CONFIGURATION

OBSOLETE	6	5	11	40.23 [1.584]	15	15	16	5-104720-1
		3	2	9.75 [.384]	3	3	4	104720-2
		3	11	40.23 [1.584]	15	15	16	104720-1
REMARKS	PLATING	POST NO OMITTED	B	A	NO OF ACTIVE POSN	NO OF POSN	ASSEMBLY PART NUMBER	

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN KATE HELM 6/6/90 CHK RANDY FEJDT 6/6/90	Tyco Electronics Corporation Harrisburg, Pa 17105-3608
DIMENSIONS: mm [INCHES]	TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD RANDY FEJDT 6/6/90	NAME
	0 PLC ± -	PRODUCT SPEC	ASSY HDR,MOD II,BREAKAWAY SGL-ROW,.100 C, .025 SQ. POSTS SELECTIVE LOADING
	1 PLC ± -	APPLICATION SPEC	
	2 PLC ± .13 [.005]	WEIGHT -	
MATERIAL	SEE TABLE	SIZE A1	CAGE CODE 00779
CUSTOMER DRAWING		SCALE 4:1	SHEET 1 OF 1