

4

3




2

1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION ,1998
COPYRIGHT 1998 BY AMP INCORPORATED.ALL RIGHTS RESERVED.

LOC		DIST		REVISIONS						
				P	LTR	DESCRIPTION	ECN	DATE	DWN	APVD
J					0	RELEASED	FJ00-1421-98	7/DEC 98	K.I.H	
					A	REVISED	FJ00-1080-00	2/SEP 00	Y.K	S.M
					B	REVISED	FJD0-0039-03	2/JUN 03	T.S	S.M
					B1	REVISED	ECR-05-000483	24/MAY 05	T.S	b.m

D

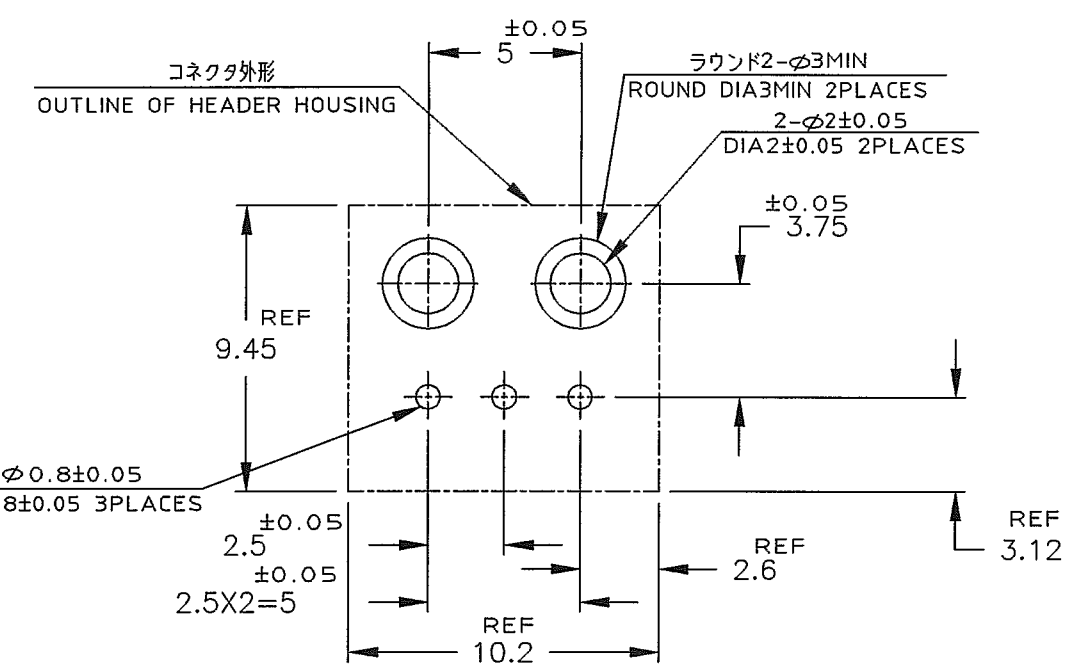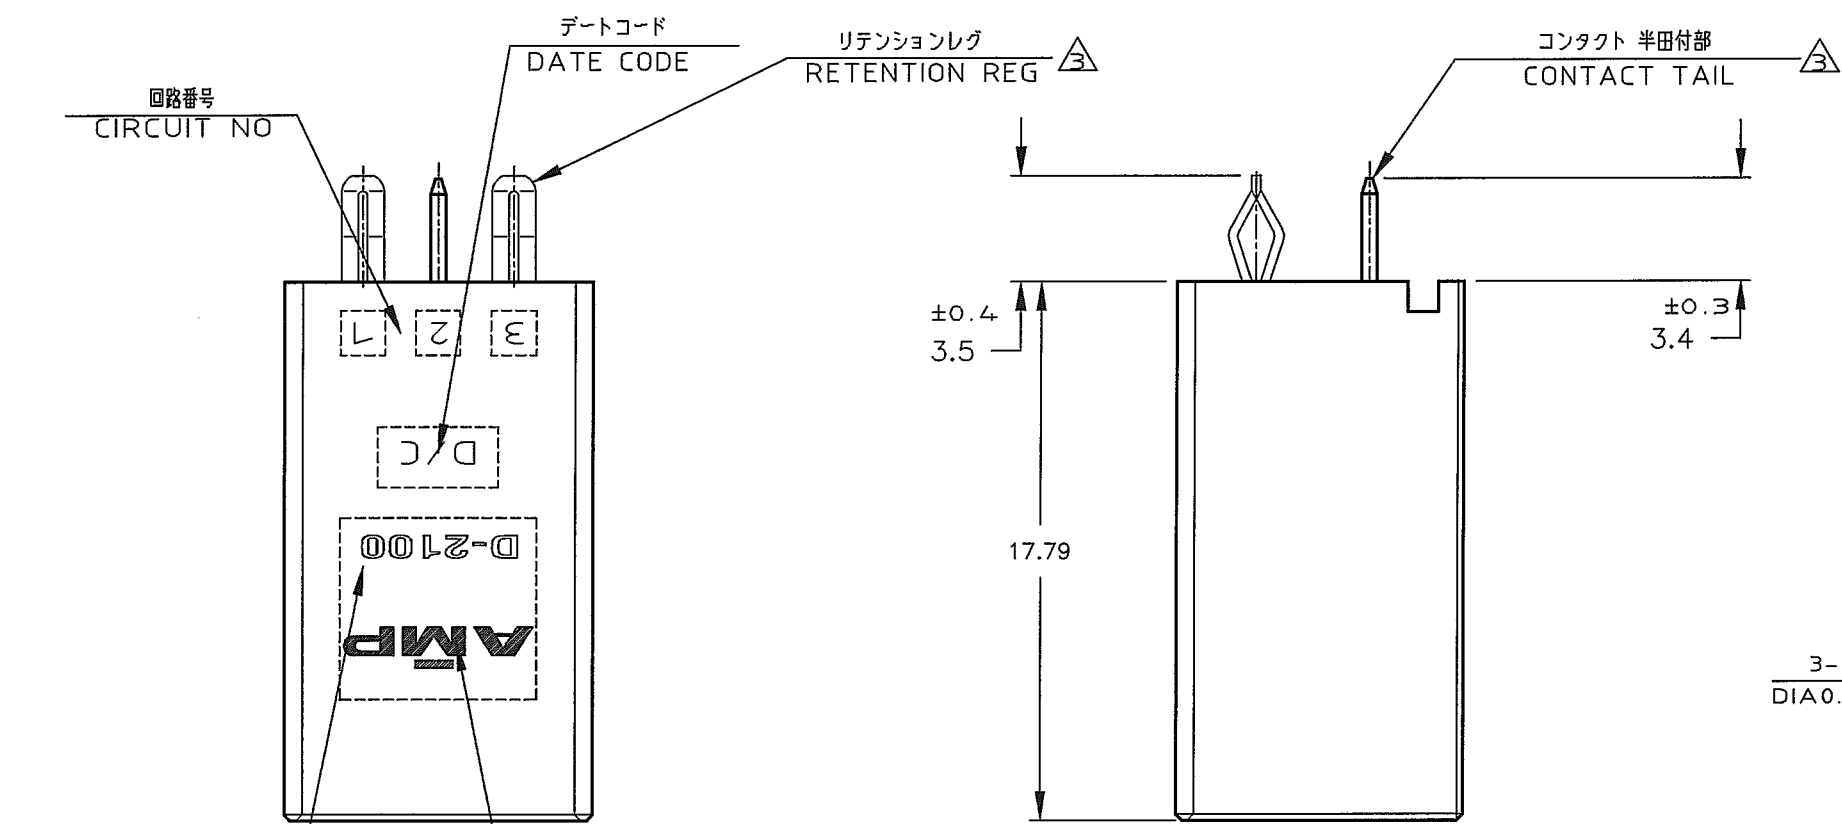


1318123-2
(KEYING Y)
SCALE:2-1

推奨基板取付け穴寸法 (公差:±0.05)
PC 基板厚:1.6±0.3
(コネクタ搭載面)
RECOMENDED PC BOARD HOLE PATTERN(TOL:±0.05)
PC BOARD THICKNESS:1.6±0.3
(CONNECTOR MOUNT SIDE)

C


B

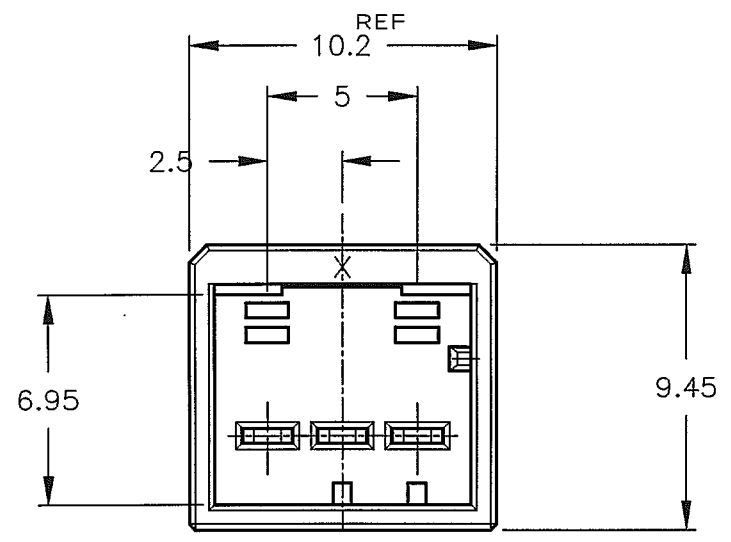

1318123-1
(KEYING X)

- NOTES
- MATERIAL:HOUSING:GLASS FILED THERMO PLASTIC ,POLYESTER(94V-0),COLOR:BLACK
TAB CONTACT:COPPER ALLOY
RETENTION LEG:BRASS
 - FINISH(CONTACT AREA):0.38μmMIN GOLD PLATING OVER Ni PLATING
 - FINISH(RETENTION LEG): TIN PLATED (CONTACT TAIL) OVER NICKEL

- 注 記
- 材料: ハウジング: ガラス入り熱可塑性
ポリエステル樹脂 (94V-0),色: 黒
タブ コンタクト: 銅合金
リテンション レグ: 黄銅
 - めっき: コンタクト: 全面Ni下地
接触部: 0.38μm MIN金めっき
 - めっき: リテンションレグとコンタクト半田付部
: ニッケル下地の上にスズめっき

THIS DRAWING IS A CONTROLLED DOCUMENT FOR AMP INCORPORATED IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.		DWN K.IKEDA 7/DEC/'98	tyco Electronics		Tyco Electronics AMP K.K. Kawasaki,Japan	
DIMENSIONS: 単位 特 mm		CHK N.MATSUBARA 7/DEC/'98				
		APVD I.HASEGAWA 7/DEC/'98	NAME 名称 1列 ヘッダーアセンブリー 3P (垂直タイプ) SINGLE ROW HEADER ASS'Y 3P ("V"TYPE) <DYNAMIC D-2100D>			
		PRODUCT SPEC 製品規格 108-5619				
TOLERANCES UNLESS OTHERWISE SPECIFIED: 一般公差 10% : ±0.3 30% : ±0.35 10% : ±0.4 ANGLE : ±3°		APPLICATION SPEC 取付適用規格 114-5258	SIZE A3	CAGE CODE 00779	DRAWING NO 番号 C-1318123	RESTRICTED TO —
MATERIAL 材料 注記参照 SEE NOTES		FINISH 仕上 注記参照 SEE NOTES	CUSTOMER DRAWING			
			SCALE 尺 4-1	SHEET 1	OF 2	REV B1

4

3

2

1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

,1998

© COPYRIGHT 1998


BY AMP INCORPORATED, ALL RIGHTS RESERVED.

LOC

DIST


REVISIONS

P	LTR	DESCRIPTION	ECN	DATE	DWN	APVD
		SEE 1 OF 2				

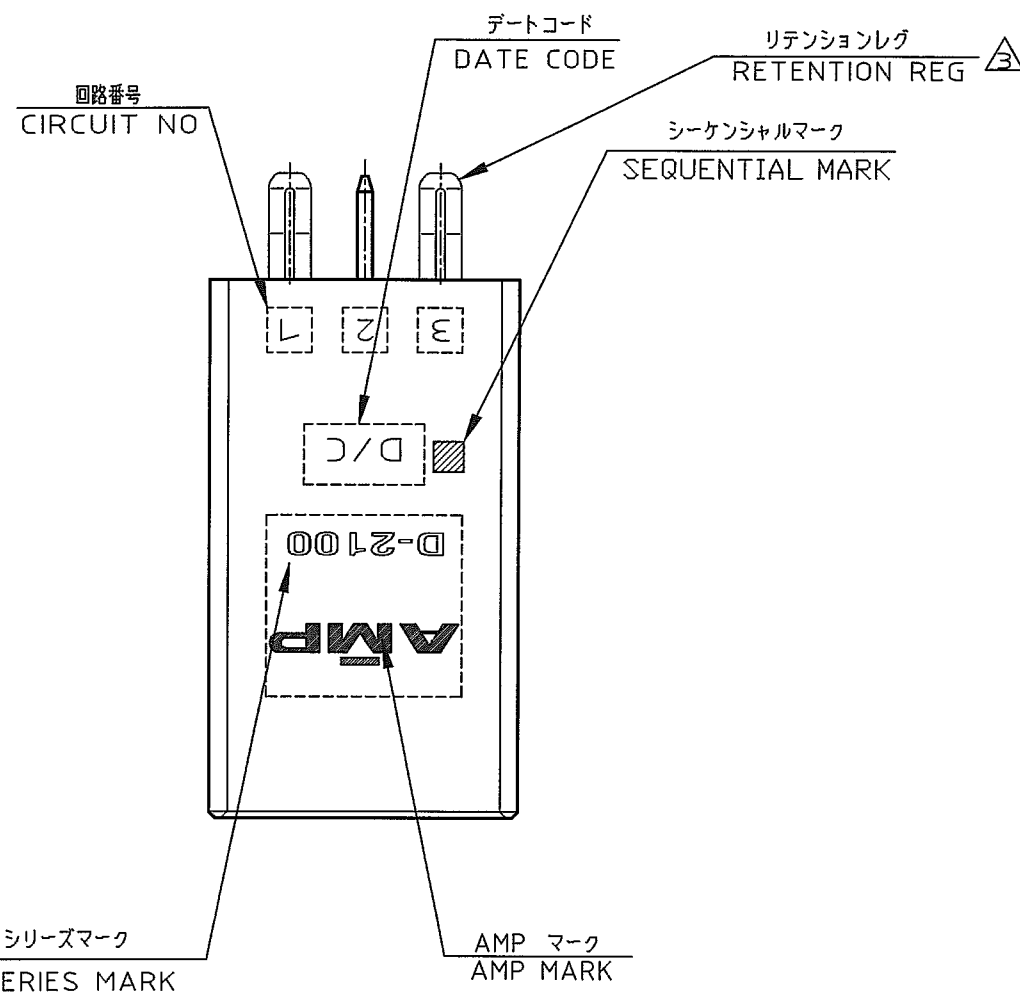1-1318123-1; AS SHOWN
SEQUENTIAL TYPE

CONTACT TAIL

Ground post ① Signal post ②

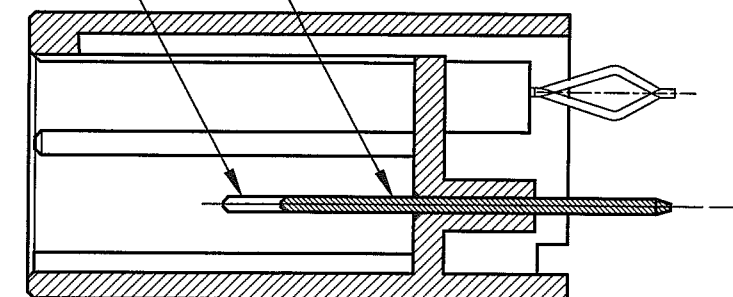

SECT A-A

	回路番号		
	1	2	3
1列	② Signal	② Signal	① Ground

POINT OF SEQUENTIAL

1-1318123-1

(KEYING X)

NOTES

1. MATERIAL: HOUSING: GLASS FILLED THERMO PLASTIC
POLYESTER(94V-0), COLOR: BLACK

TAB CONTACT: COPPER ALLOY

RETENTION LEG: BRASS

△2. FINISH (CONTACT AREA): 0.38μm MIN GOLD PLATING
OVER Ni PLATING△3. FINISH (RETENTION LEG): TIN PLATED
(CONTACT TAIL) OVER NICKEL


注記

1. 材料: ハウジング: ガラス入り熱可塑性

ポリエステル樹脂 (94V-0), 色: 黒

タブ コンタクト: 銅合金

リテンション レグ: 黄銅

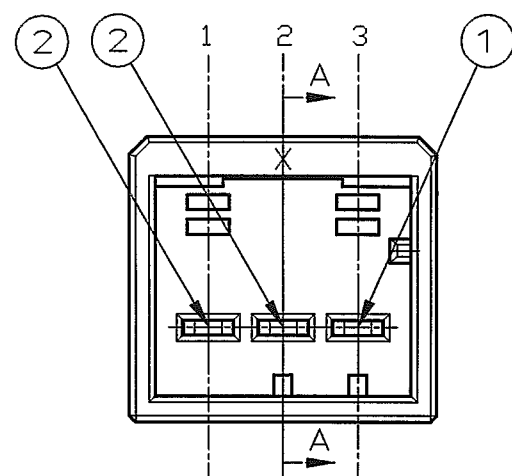△2. めっき: コンタクト: 全面Ni下地
接触部: 0.38μm MIN金めっき△3. めっき: リテンションレグとコンタクト半田付部
: ニッケル下地の上にスズめっき1-1318123-1
(KEYING X)

THIS DRAWING IS A CONTROLLED DOCUMENT FOR AMP INCORPORATED. IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.		DWN K. IKEDA 7/DEC/'98		Tyco Electronics AMP K.K. Kawasaki, Japan	
DIMENSIONS: 単位 長 mm		CHK N. MATSUBARA 7/DEC/'98		NAME 1列 ヘッダーアセンブリー 3P	
TOLERANCES UNLESS OTHERWISE SPECIFIED: 一般公差 10% : ±0.3 30% : ±0.35 10% : ±0.4 ANGLE : ±3°		APVD I. HASEGAWA 7/DEC/'98		<垂直タイプ> SINGLE ROW HEADER ASS'Y 3P ("V" TYPE) <DYNAMIC D-2100D>	
MATERIAL 材料 注記参照 SEE NOTES		PRODUCT SPEC 108-5619		SIZE A3	
FINISH 仕上 注記参照 SEE NOTES		APPLICATION SPEC 114-5258		CAGE CODE 00779	
		WEIGHT		DRAWING NO C-1318123	
		CUSTOMER DRAWING		RESTRICTED TO —	
		SCALE 4-1		SHEET 2 OF 2 REV B1	