
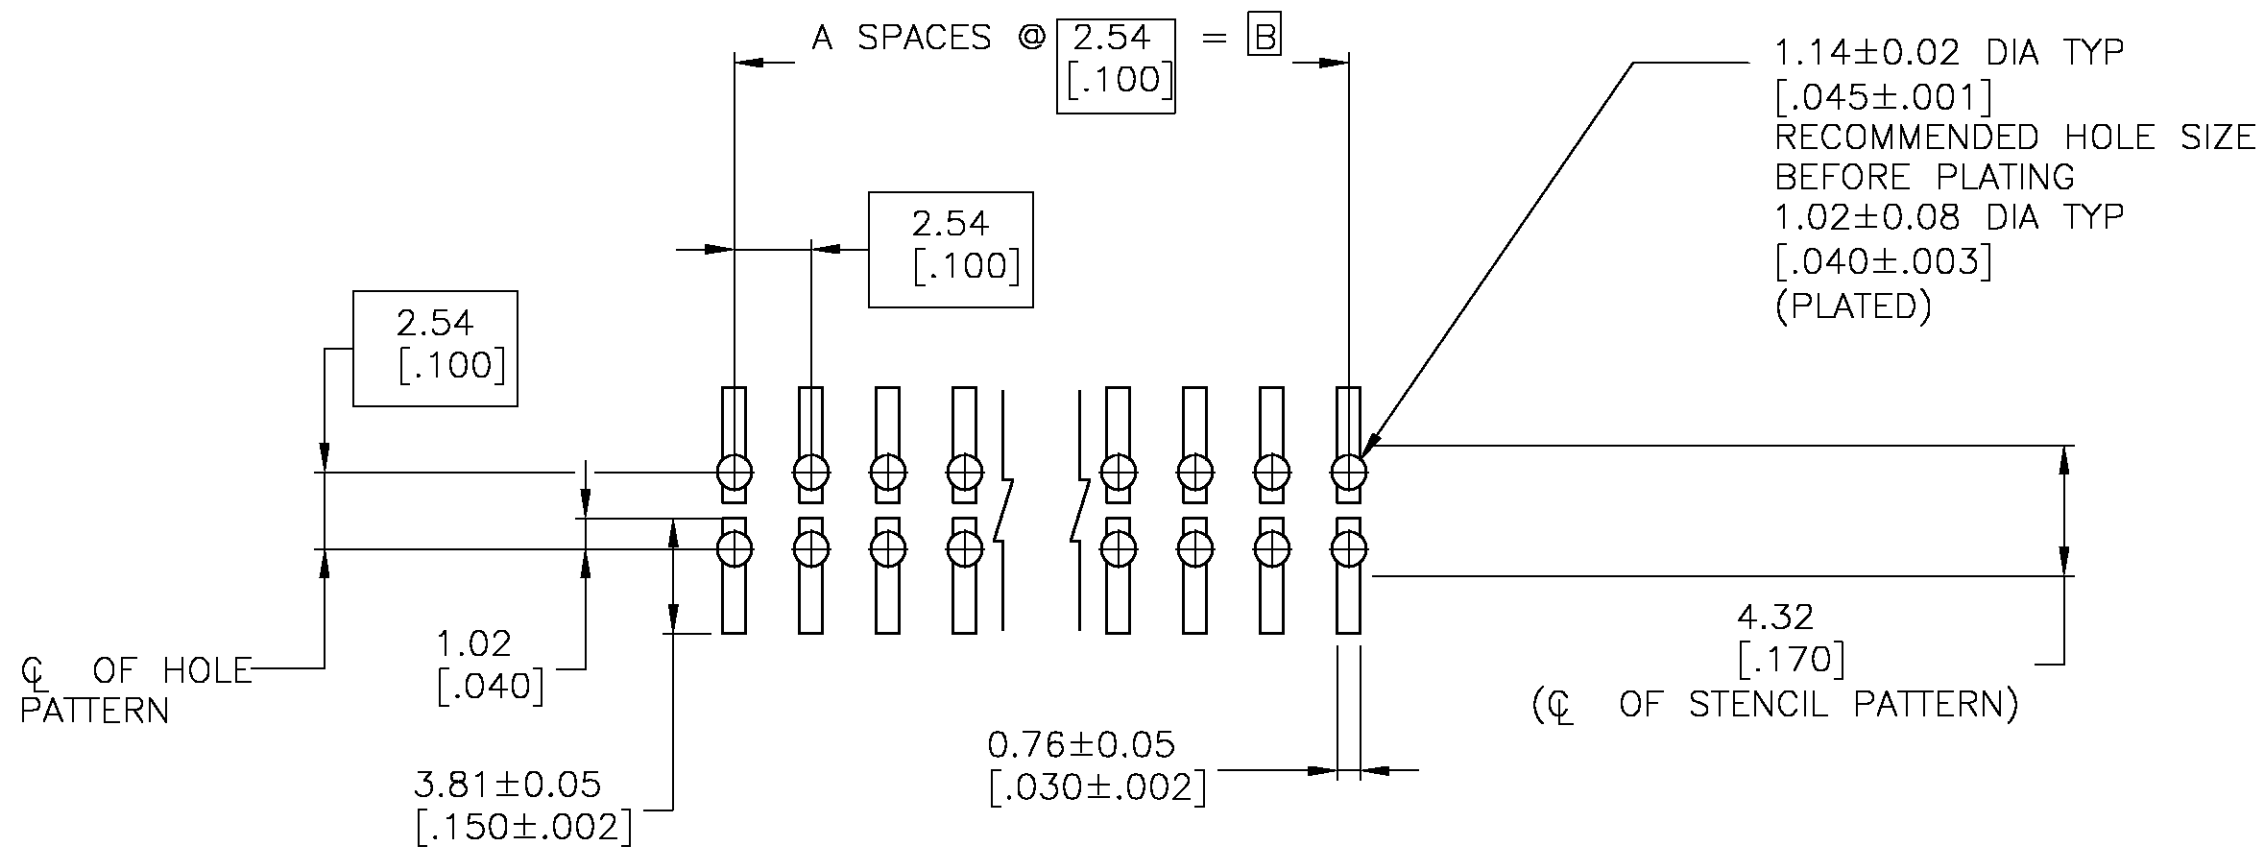
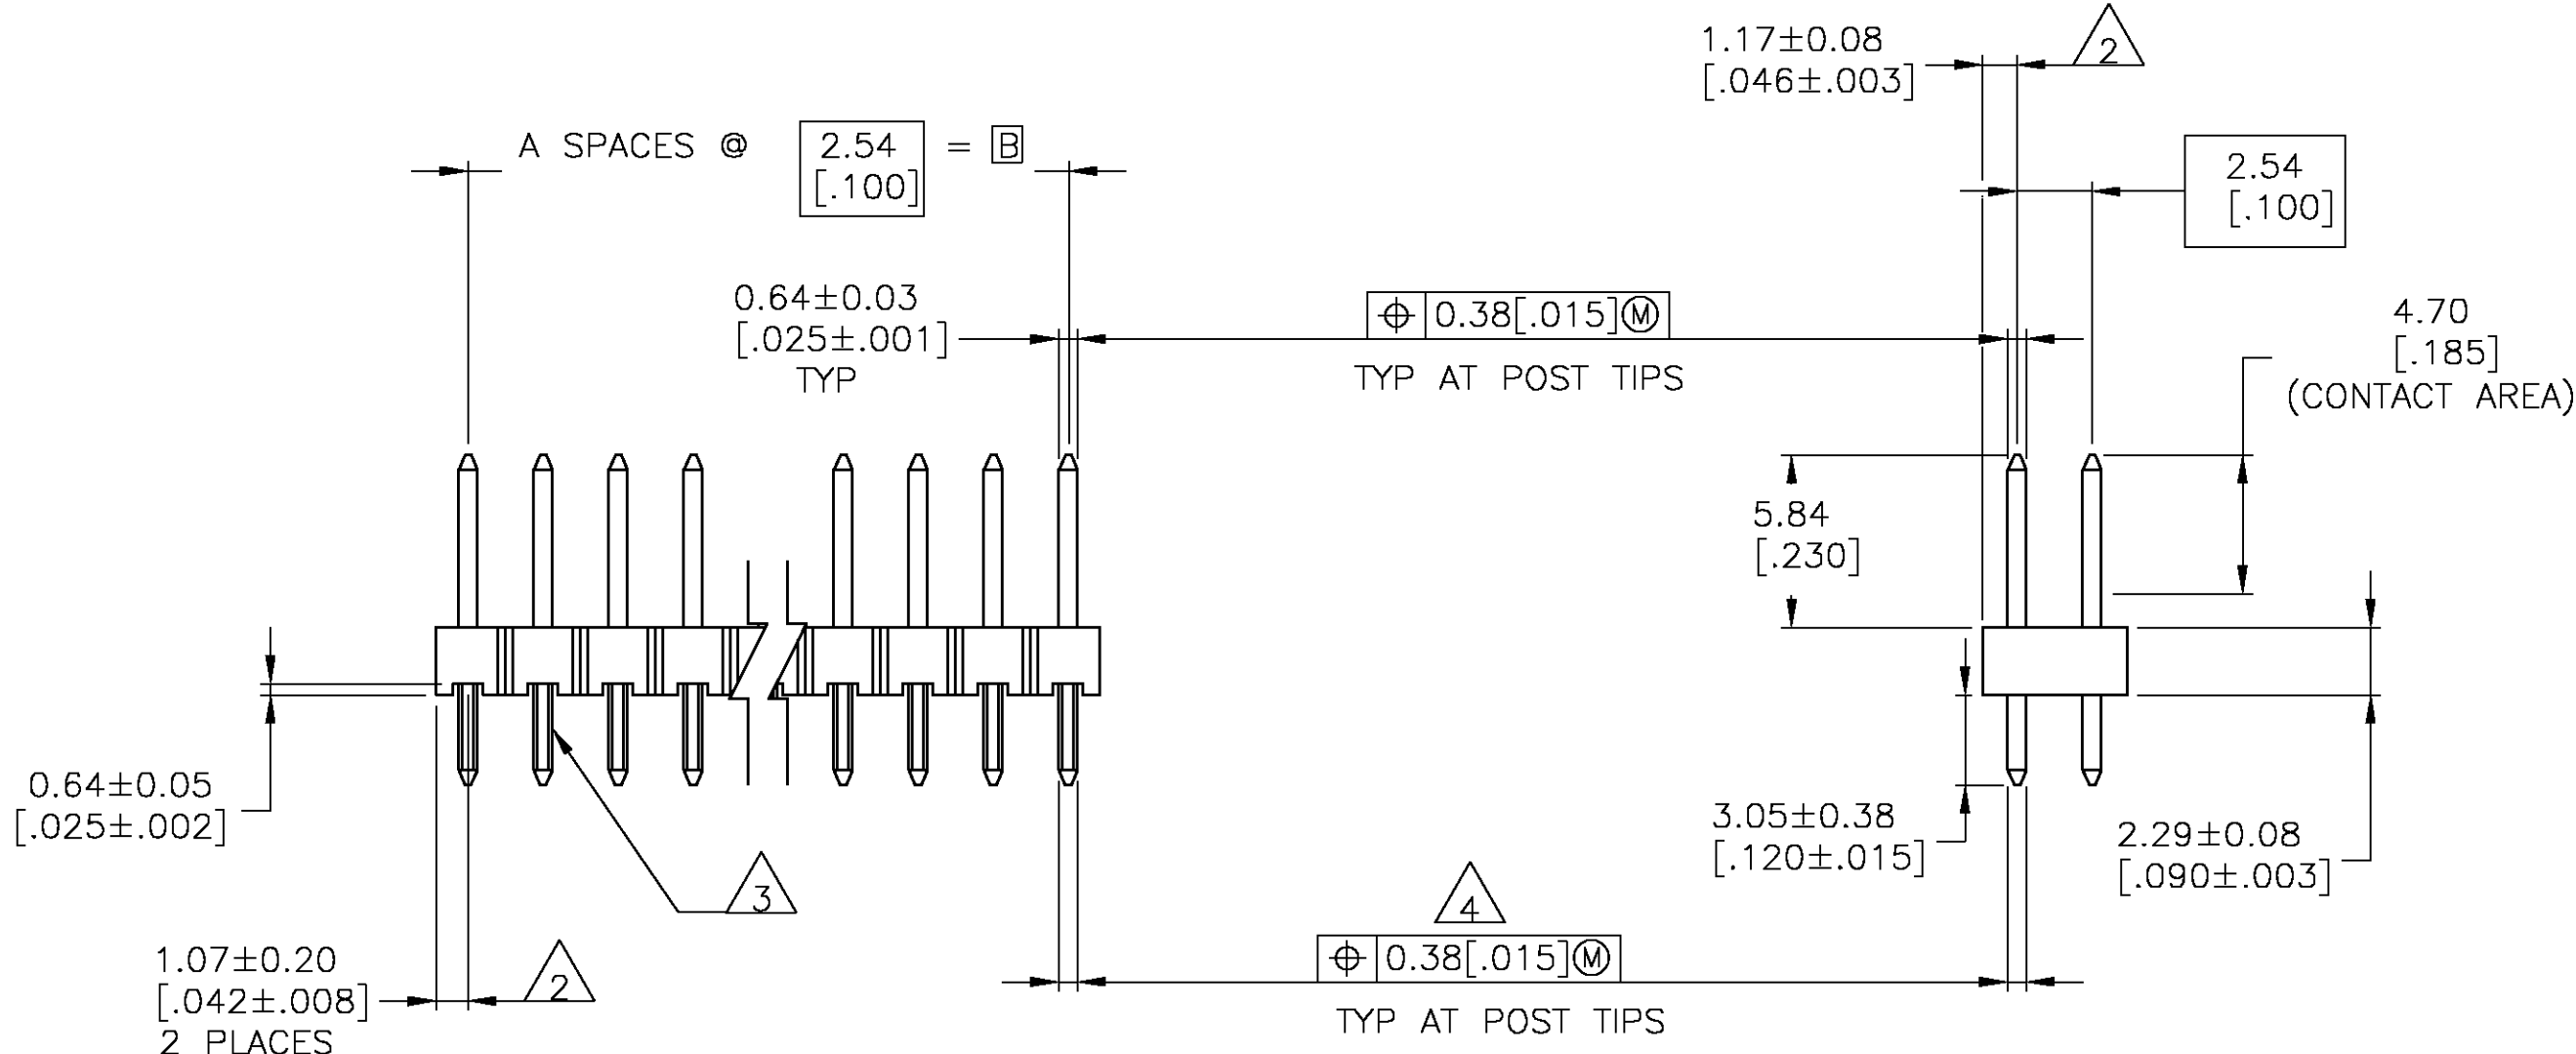


LOC		DIST		REVISIONS				
AD	00	P	LTR	DESCRIPTION	DATE	DWN	APVD	
		G	EC	OG3C 0862 04	25FEB05	BSV	JLG	

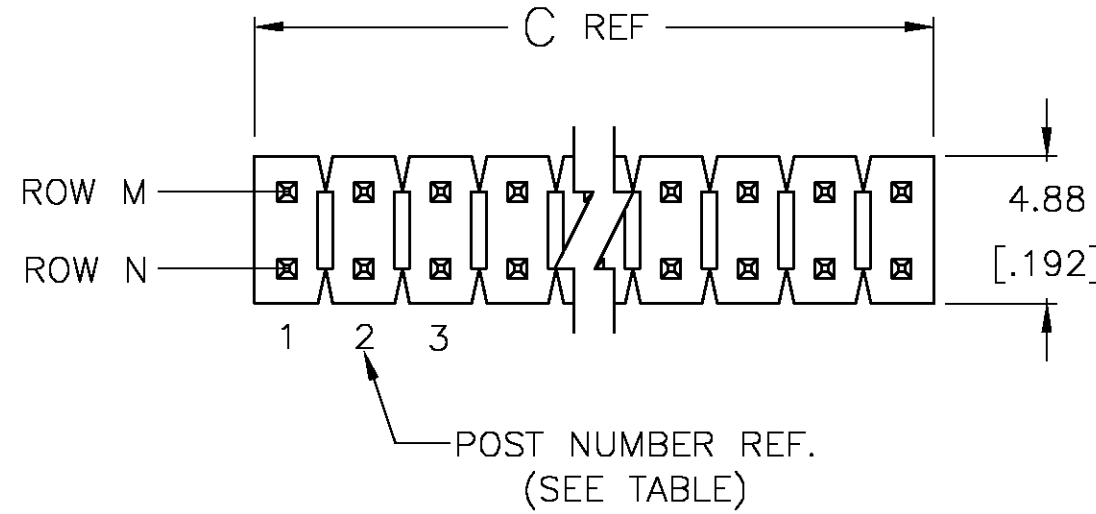

RECOMMENDED PC BOARD MOUNTING DIMENSIONS
FOR .063[1.60] THICK PC BOARD AND
.012[.305] STENCIL THICK

- TRUE POSITION TOLERANCE OF THE POST TIPS APPLIES WHEN THE HEADER IS HELD FLAT AGAINST THE PRINTED CIRCUIT BOARD.
- THE NOTED DIMENSIONS APPLY AT THE INTERSECTION OF THE POST AND HOUSING.
- RETENTION FEATURES ON SOLDER TAILS, LOCATED AT MANUFACTURERS OPTION.
- $\varnothing 0.51[.020]$ FOR KINKED TAILS.
- HOUSING: LCP, COLOR-BLACK.
POST: PHOSPHOR BRONZE
- 0.000381 [.000015] GOLD IN CONTACT AREA,
0.00254-0.00508 [.0000100-.0000200] MATTE TIN-LEAD ON SOLDER TAIL,
ALL OVER 0.00127 [.000050] NICKEL.
- 0.000381 [.000015] GOLD IN CONTACT AREA,
0.00254-0.00508 [.0000100-.0000200] MATTE TIN ON SOLDER TAIL,
ALL OVER 0.00127 [.000050] NICKEL.

$\triangle$	101.19 [3.984]	99.06 [3.900]	39	80	9-146268-0	$\triangle$	101.19 [3.984]	99.06 [3.900]	39	80	4-146268-0
$\triangle$	98.65 [3.884]	96.52 [3.800]	38	78	8-146268-9	$\triangle$	98.65 [3.884]	96.52 [3.800]	38	78	3-146268-9
$\triangle$	96.11 [3.784]	93.98 [3.700]	37	76	8-146268-8	$\triangle$	96.11 [3.784]	93.98 [3.700]	37	76	3-146268-8
$\triangle$	93.57 [3.684]	91.44 [3.600]	36	74	8-146268-7	$\triangle$	93.57 [3.684]	91.44 [3.600]	36	74	3-146268-7
$\triangle$	91.03 [3.584]	88.90 [3.500]	35	72	8-146268-6	$\triangle$	91.03 [3.584]	88.90 [3.500]	35	72	3-146268-6
$\triangle$	88.49 [3.484]	86.36 [3.400]	34	70	8-146268-5	$\triangle$	88.49 [3.484]	86.36 [3.400]	34	70	3-146268-5
$\triangle$	85.95 [3.384]	83.82 [3.300]	33	68	8-146268-4	$\triangle$	85.95 [3.384]	83.82 [3.300]	33	68	3-146268-4
$\triangle$	83.41 [3.284]	81.28 [3.200]	32	66	8-146268-3	$\triangle$	83.41 [3.284]	81.28 [3.200]	32	66	3-146268-3
$\triangle$	80.87 [3.184]	78.74 [3.100]	31	64	8-146268-2	$\triangle$	80.87 [3.184]	78.74 [3.100]	31	64	3-146268-2
$\triangle$	78.33 [3.084]	76.20 [3.000]	30	62	8-146268-1	$\triangle$	78.33 [3.084]	76.20 [3.000]	30	62	3-146268-1
$\triangle$	75.79 [2.984]	73.66 [2.900]	29	60	8-146268-0	$\triangle$	75.79 [2.984]	73.66 [2.900]	29	60	3-146268-0
$\triangle$	73.25 [2.884]	71.12 [2.800]	28	58	7-146268-9	$\triangle$	73.25 [2.884]	71.12 [2.800]	28	58	2-146268-9
$\triangle$	70.71 [2.784]	68.58 [2.700]	27	56	7-146268-8	$\triangle$	70.71 [2.784]	68.58 [2.700]	27	56	2-146268-8
$\triangle$	68.17 [2.684]	66.04 [2.600]	26	54	7-146268-7	$\triangle$	68.17 [2.684]	66.04 [2.600]	26	54	2-146268-7
$\triangle$	65.63 [2.584]	63.5 [2.500]	25	52	7-146268-6	$\triangle$	65.63 [2.584]	63.5 [2.500]	25	52	2-146268-6
$\triangle$	63.09 [2.484]	60.96 [2.400]	24	50	7-146268-5	$\triangle$	63.09 [2.484]	60.96 [2.400]	24	50	2-146268-5
$\triangle$	60.55 [2.384]	58.42 [2.300]	23	48	7-146268-4	$\triangle$	60.55 [2.384]	58.42 [2.300]	23	48	2-146268-4
$\triangle$	58.01 [2.284]	55.88 [2.200]	22	46	7-146268-3	$\triangle$	58.01 [2.284]	55.88 [2.200]	22	46	2-146268-3
$\triangle$	55.47 [2.184]	53.34 [2.100]	21	44	7-146268-2	$\triangle$	55.47 [2.184]	53.34 [2.100]	21	44	2-146268-2
$\triangle$	52.93 [2.084]	50.80 [2.000]	20	42	7-146268-1	$\triangle$	52.93 [2.084]	50.80 [2.000]	20	42	2-146268-1
$\triangle$	50.39 [1.984]	48.26 [1.900]	19	40	7-146268-0	$\triangle$	50.39 [1.984]	48.26 [1.900]	19	40	2-146268-0
$\triangle$	47.85 [1.884]	45.72 [1.800]	18	38	6-146268-9	$\triangle$	47.85 [1.884]	45.72 [1.800]	18	38	1-146268-9
$\triangle$	45.31 [1.784]	43.18 [1.700]	17	36	6-146268-8	$\triangle$	45.31 [1.784]	43.18 [1.700]	17	36	1-146268-8
$\triangle$	42.77 [1.684]	40.64 [1.600]	16	34	6-146268-7	$\triangle$	42.77 [1.684]	40.64 [1.600]	16	34	1-146268-7
$\triangle$	40.23 [1.584]	38.10 [1.500]	15	32	6-146268-6	$\triangle$	40.23 [1.584]	38.10 [1.500]	15	32	1-146268-6
$\triangle$	37.69 [1.484]	35.56 [1.400]	14	30	6-146268-5	$\triangle$	37.69 [1.484]	35.56 [1.400]	14	30	1-146268-5
$\triangle$	35.15 [1.384]	33.02 [1.300]	13	28	6-146268-4	$\triangle$	35.15 [1.384]	33.02 [1.300]	13	28	1-146268-4
$\triangle$	32.61 [1.284]	30.48 [1.200]	12	26	6-146268-3	$\triangle$	32.61 [1.284]	30.48 [1.200]	12	26	1-146268-3
$\triangle$	30.07 [1.184]	27.94 [1.100]	11	24	6-146268-2	$\triangle$	30.07 [1.184]	27.94 [1.100]	11	24	1-146268-2
$\triangle$	27.53 [1.084]	25.40 [1.000]	10	22	6-146268-1	$\triangle$	27.53 [1.084]	25.40 [1.000]	10	22	1-146268-1
$\triangle$	24.99 [.984]	22.86 [.900]	9	20	6-146268-0	$\triangle$	24.99 [.984]	22.86 [.900]	9	20	1-146268-0
$\triangle$	22.45 [.884]	20.32 [.800]	8	18	5-146268-9	$\triangle$	22.45 [.884]	20.32 [.800]	8	18	146268-9
$\triangle$	19.91 [.784]	17.78 [.700]	7	16	5-146268-8	$\triangle$	19.91 [.784]	17.78 [.700]	7	16	146268-8
$\triangle$	17.37 [.684]	15.24 [.600]	6	14	5-146268-7	$\triangle$	17.37 [.684]	15.24 [.600]	6	14	146268-7
$\triangle$	14.83 [.584]	12.70 [.500]	5	12	5-146268-6	$\triangle$	14.83 [.584]	12.70 [.500]	5	12	146268-6
$\triangle$	12.29 [.484]	10.16 [.400]	4	10	5-146268-5	$\triangle$	12.29 [.484]	10.16 [.400]	4	10	146268-5
$\triangle$	9.75 [.384]	7.62 [.300]	3	8	5-146268-4	$\triangle$	9.75 [.384]	7.62 [.300]	3	8	146268-4
$\triangle$	7.21 [.284]	5.08 [.200]	2	6	5-146268-3	$\triangle$	7.21 [.284]	5.08 [.200]	2	6	146268-3
$\triangle$	4.67 [.184]	2.54 [.100]	1	4	5-146268-2	$\triangle$	4.67 [.184]	2.54 [.100]	1	4	146268-2
$\triangle$	2.13 [.084]	[-]	-	2	5-146268-1	$\triangle$	2.13 [.084]	[-]	-	2	146268-1
PLATING	C	B	A	NO. OF POSITIONS	PART NUMBER	PLATING	C	B	A	NO. OF POSITIONS	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
mm [INCHES]

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ± -
1 PLC ± -
2 PLC ± 0.51[.02]
3 PLC ± 0.127[.005]
4 PLC ± 0.0127[.0005]
ANGLES ±
MATERIAL SEE TABLE

DIN T. HOFFMAN DBMAY95
CHK G. DUBNICZKI 04MAR98
APVD G. DUBNICZKI 04MAR98
PRODUCT SPEC
APPLICATION SPEC
WEIGHT -
CUSTOMER DRAWING

tyco
Electronics

Tyce Electronics Corporation
Harriburg, Pa 17105-3508

NAME
HEADER ASSEMBLY, MOD II, BREAKAWAY,DOUBLE ROW,
.100 X.100 CL , VERTICAL, WITH RETENTION FEATURE,
.025 SQ.POSTS, HIGH TEMPERATURE

SIZE
A1

CAGE CODE
00779

DRAWING NO
146268

RESTRICTED TO
-

SCALE 4:1

SHEET 1 OF 1

REV G

AMP 4805 REV 31MAR2000