

SCALA NON IMPEGNATIVA
(DO NOT SCALE)
DIMENSIONI IN mm
DIMENSIONS IN mm

METRIC

PROIEZIONE EUROPEA
(EUROPEAN PROJECTION)

NOTE:



1. **CONTATTO:** LEGA DI RAME, NICHELATO E DORATO / STAGNATO.
BLOCCETTO: RESINA POLIESTERE CARICATO VETRO,
U.L. 94 V-0 COLORE NERO.
(POST: COPPER ALLOY, GOLD DUPLEX PL. OVER NICKEL
HSG: GLASSFIBER FILLED PBT F.R., COLOR BLACK)

2. QUESTA POLARIZZAZ. NON È ESISTENTE NEI CONN.
A 10 E 14 POSIZIONI.
(AT THIS SIDE OF CONN. NO POLARIZATION ON 10 & 14 POSIT.)

3. ADMITTED WARPING $\pm 0,25/50$ FOR 60 POS.
ONLY

* OBSOLETE P/N.

QUESTO CONNETTORE È APPROVATO E CERTIFICATO
(THIS CONNECTOR IS APPROVED AND CERTIFIED.)

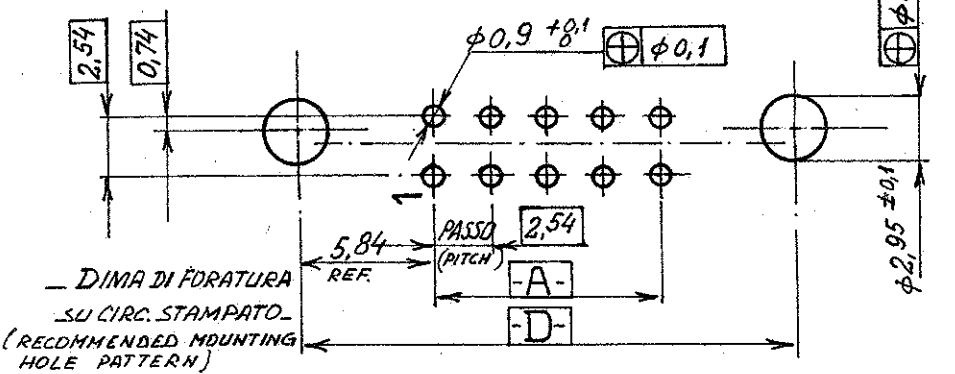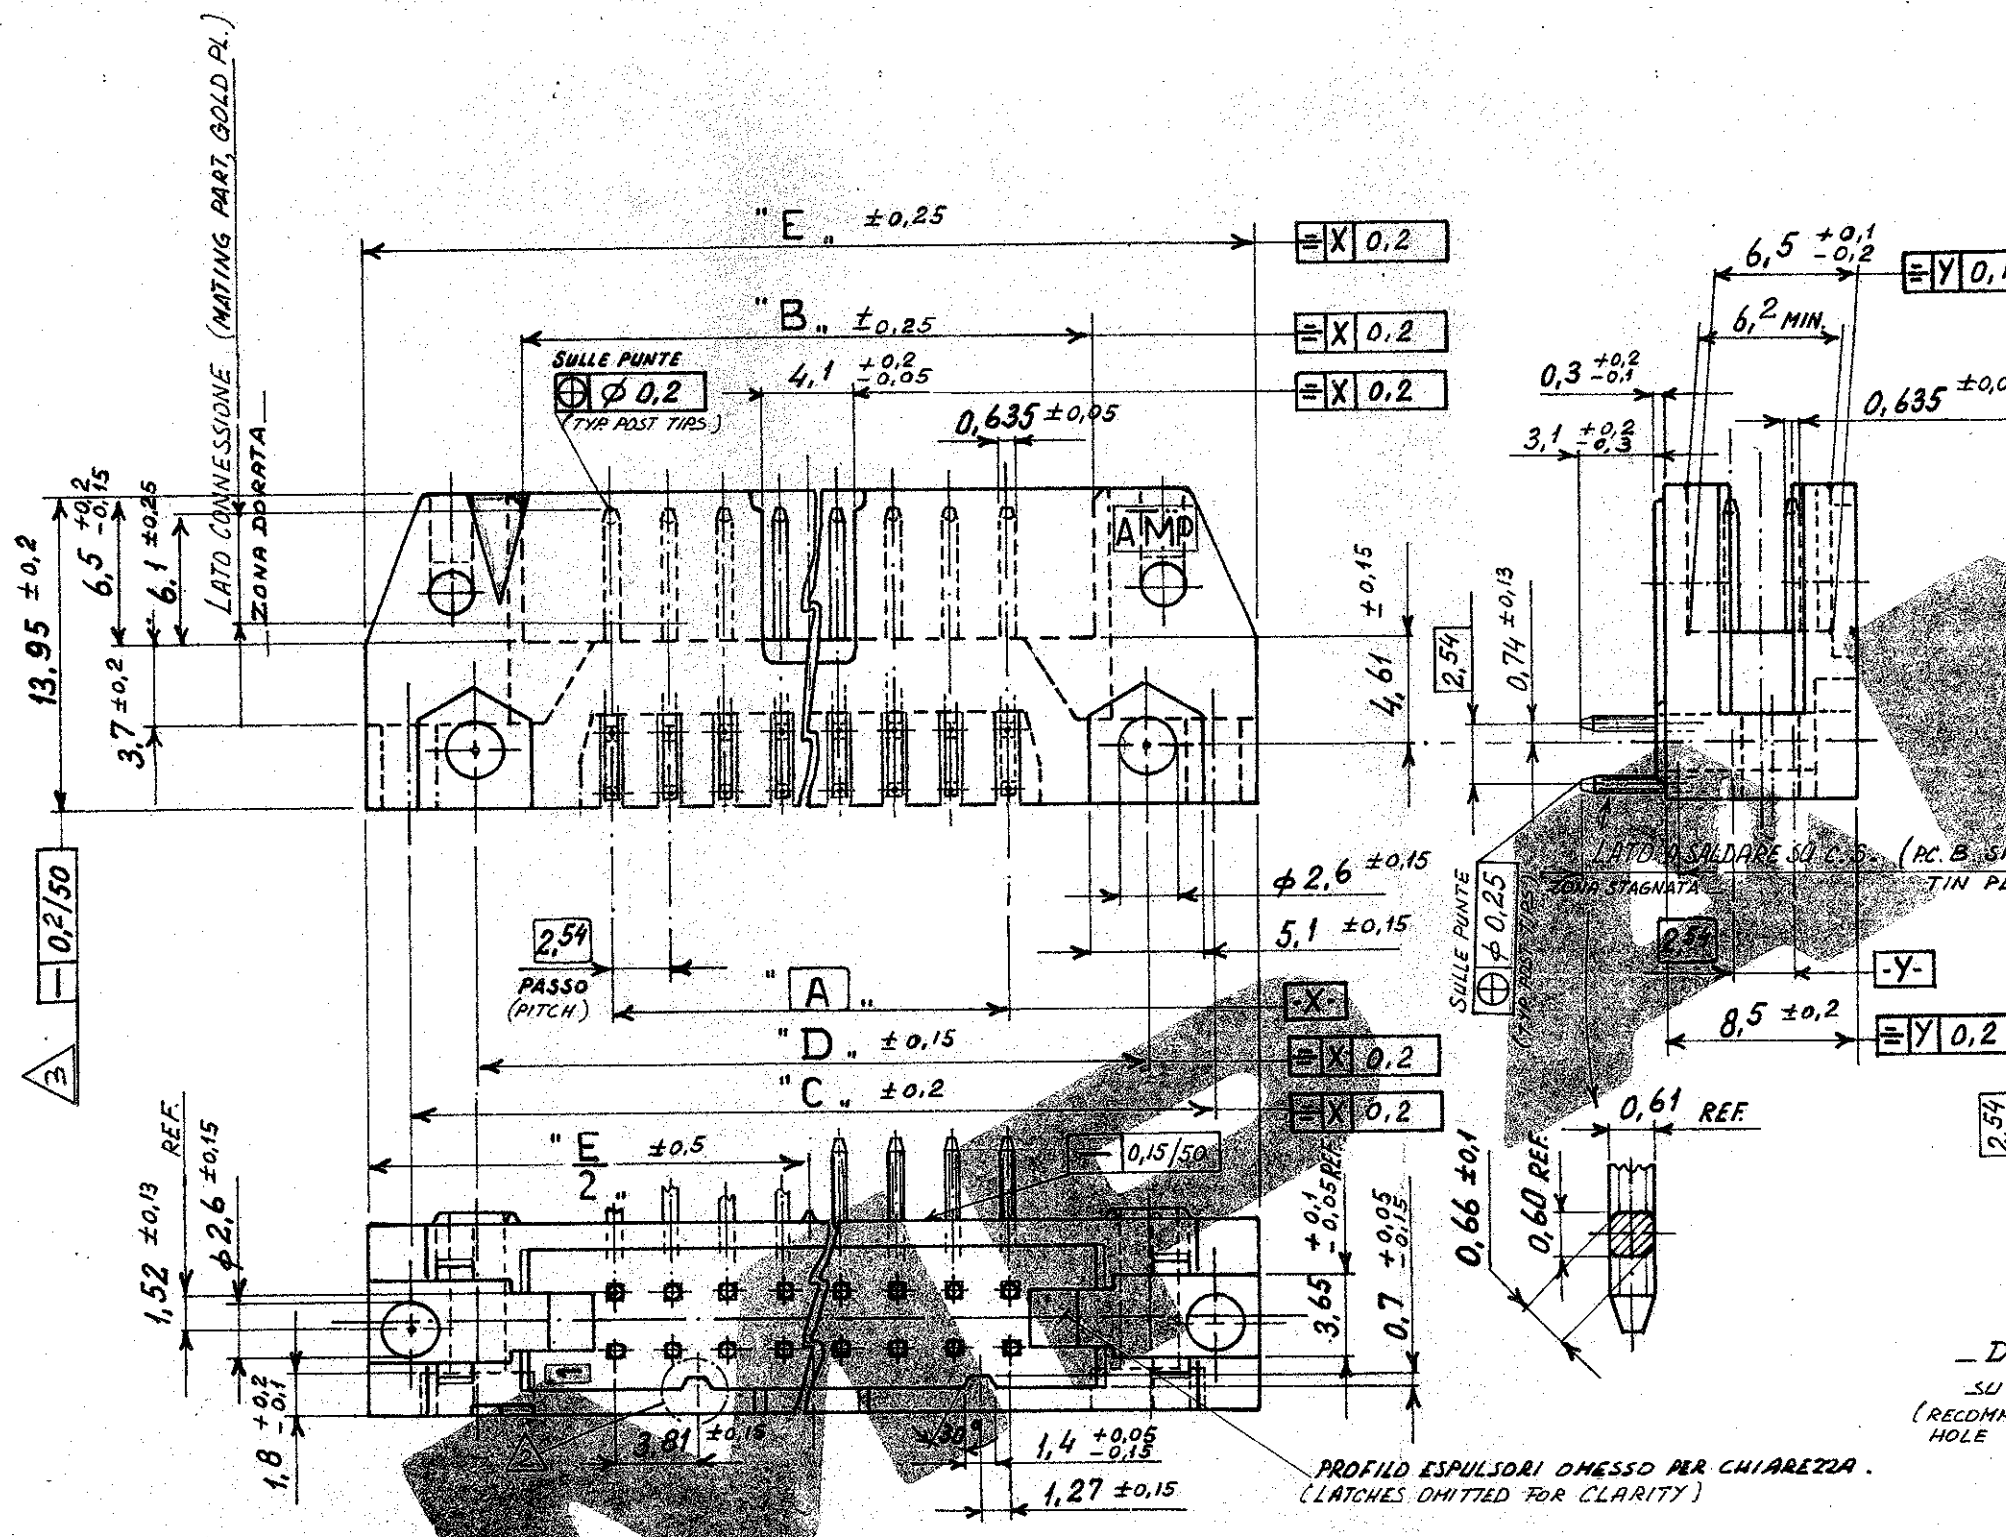

FINITURA / COLORE (FINISH / COLOUR)	MATERIALE (MATERIAL)	NUMERO (PART NUMBER)
CUSTOMER DWG. FOR REFERENCE ONLY		DISEGNO PER CLIENTE SOLO PER RIFERIMENTO
THIS DRAWING IS UNPUBLISHED		RELEASE FOR PUBLICATION 19
© COPYRIGHT 1983 BY AMP INCORPORATED, HARRISBURG, PA ALL INTERNATIONAL RIGHT RESERVED AMP PRODUCTS MAY BE COVERED BY U.S. AND FOREIGN PATENT AND/OR PATENT PENDING		
TOLLERANZE: SE NON DIVERSAMENTE SPECIFICATO (TOLERANCES UNLESS OTHERWISE SPECIFIED)	DIAM. ISOLANTE (INS. DIA. RANGE)	RANGO FILI (WIRE RANGE)
$\pm 0,3$		
ANGOLI (ANGLES) $\pm 2^\circ$	AMP AMP ITALIA S.p.A. Corso F.lli Cervi, 15 COLLENO (TORINO)	
DESCRIZIONE (DESCRIPTION) AMP LATCH PIN HEADER, MIL TYPE, WITH STAMPED/ROUNDED POST, 2,54 x 2,54 GRID - (RIGHT ANGLE VERS.)	LOC. (LOC.)	NUMERO (DWG NO.)
		281517-...
REV. (REV.)	DATA (DATE)	REV. (REV.)
1	18/01/83	E

60	73,66	81,28	91,44	85,34	95,50	*6-	-0	6-	-0
50	60,96	68,58	78,74	72,64	82,80	*5-	-0	5-	-0*
40	50,64	58,26	68,42	62,32	72,48	*4-	-4	4-	-4
30	40,64	48,26	58,42	52,32	62,48	*3-	-4	3-	-4*
20	30,48	38,10	48,26	42,16	52,32	2-	-6	2-	-6*
16	22,86	30,48	40,64	34,54	44,70	2-	-0	2-	-0*
14	17,78	25,40	35,56	29,46	39,62	*1-	-6	1-	-6*
10	15,24	22,86	33,02	26,92	37,08	1-	-4	1-	-4
10	10,16	17,78	27,94	21,84	32,00	*1-	-281517-0	1-	-281518-0
N° OF POS.	A	B	C	D	E		ASS'Y PART No. (0,2 μm GOLD DUPLEX PL. VERS.)	ASS'Y PART No. (0,76 μm GOLD DUPLEX PL. VERS.)	

REV. (REV.)	REVISIONI (REVISION RECORD)	DIS. (DR.)	DATA (DATE)
E	REVISED PER ET00-0325-97	DL	25/01/83
D	ADDED NOTE A ET00-0254-86	DL	18/01/83
C	per ECN I-3233	DL	18/01/83
B	VERS. 0,2 μm ERA 0,30 μm P.S.	DL	18/01/83
A	IN PRODUZIONE	DL	18/01/83
1	AGGIUNTO 44 & 60 POS.	DL	18/01/83