DESCRIPTION: 2mm DUAL HEADER STRIP STRAIGHT

MATERIALS:
HOUSING: NYLON 6T - UL 94V-0
COLOR: BLACK
CONTACTS: COPPER ALLOY
PLATING: GOLD FLASH ENTIRE CONTACT
RoHS COMPLAINT

CURRENT RATING: 1 AMP
INSULATOR RESISTANCE: 5000 MEGOHMS MIN.
DIELECTRIC WITHSTANDING: 500V AC
OPERATING TEMP: -40°C TO +105°C
MAX PROCESSING TEMP: 260°C FOR
10 SECONDS

"L" = NO. OF PINS/ROW X .079 - .079

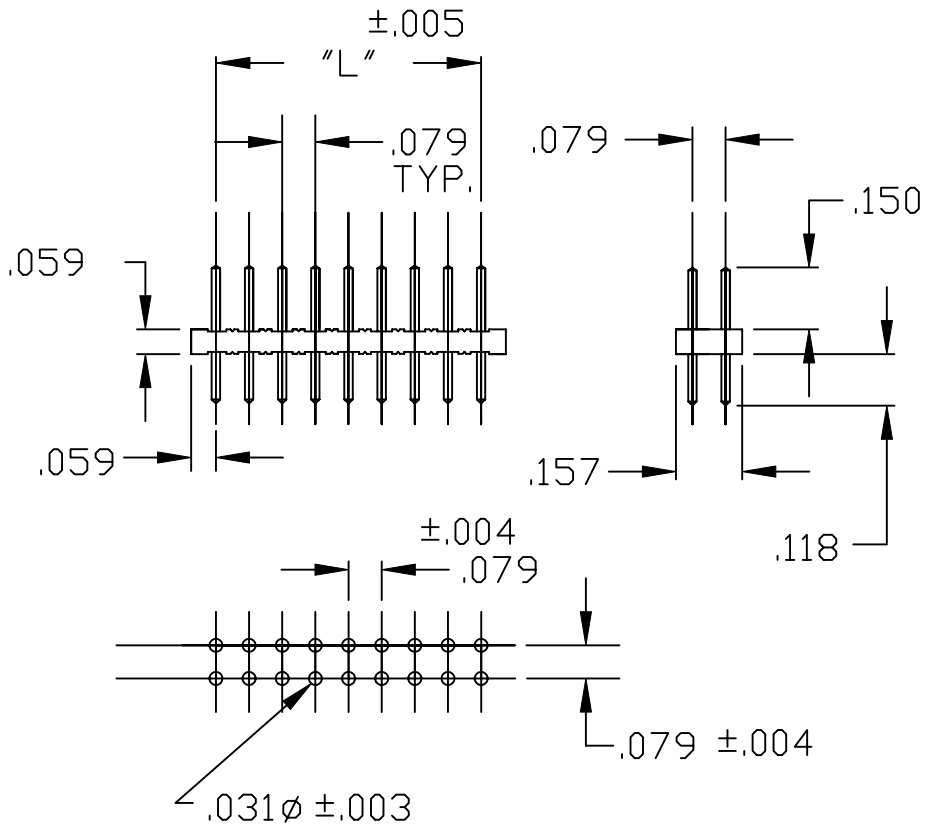

2664 YY 01RP2

SERIES
2664 = DUAL ROW

POSITIONS
DUAL = INCREMENTS OF 2
(2 TO 72)

TYPE
01 = STRAIGHT

PLATING
P2 = GOLD FLASH ENTIRE CONTACT

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OF SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

DRAWN: PAM JENKINS	DATE: 1-27-06
CHECKED:	DATE:
SCALE:	SHEET 1 OF 1
REV 2	
DWG NO. 2664YY01RP2	

NorComp